

Volts	460	Max RPM	3600	Conn Diag.	CD0006B03	Leads	3
Amps	1.05	Max Amps		Cs Diagram	CS1126	BEMF	269
HP	1	VFD#	ECIN4A2P2			LD	117
RPM	1800	S.F.	1.00			LQ	500
Phase/Hz	3/60	Rating	50C AMB-CONT			Rs	19.8095 Meas. L-L

60034-2-3 Motor Performance at Standardized Operating Points

	RPM	% Speed	LB-FT	% Torque	HP	Efficiency	Loss (% FL)	Watts Loss (W)
P1	1618	90%	2.9	100%	0.9	88.2	11.94%	90
P2	900	50%	2.9	100%	0.5	86.0	8.08%	61
P3	450	25%	2.9	100%	0.3	79.2	6.50%	49
P4	1621	90%	1.5	50%	0.5	87.1	6.62%	50
P5	900	50%	1.5	50%	0.2	87.4	3.55%	27
P6	900	50%	0.7	25%	0.1	86.0	2.02%	15
P7	450	25%	0.7	25%	0.1	83.8	1.21%	9


61800-9-2 PDS Performance at Reference Operating Points

	RPM	% Speed	LB-FT	% Torque	HP	System Efficiency	Loss (% FL)	Watts Loss (W)
P1	1799	100%	2.9	100%	1.0	87.0	14.73%	111
P2	900	50%	2.9	100%	0.5	81.0	11.61%	88
P3	300	17%	2.9	100%	0.2	63.2	9.59%	72
P4	1802	100%	1.5	50%	0.5	83.5	9.78%	74
P5	900	50%	1.5	50%	0.2	79.4	6.41%	48
P6	300	17%	1.5	50%	0.1	61.5	5.17%	39
P7	900	50%	0.7	25%	0.1	73.2	4.53%	34
P8	300	17%	0.7	25%	0.0	53.7	3.56%	27

Points not taken in certified order.

BALDOR • RELIANCE	DR By:	<u>R & D</u>	AC MOTOR PERFORMANCE CURVES	35WGG965 35-0000-1623 Test - 111577
	CK By:	<u>USTOSAN</u>		
	APP By:	<u>USWEQUA1</u>		
	Date:	<u>11/14/2024</u>		

Volts	460	Max RPM	3600	Conn Diag.	CD0006B03	Leads	3
Amps	1.05	Max Amps		Cs Diagram	CS1126	BEMF	269
HP	1	VFD #	ECIN4A2P2			LD	117
RPM	1800	S.F.	1.00			LQ	500
Phase/Hz	3/60	Rating	50C AMB-CONT			Rs	19.8095 Meas L-L

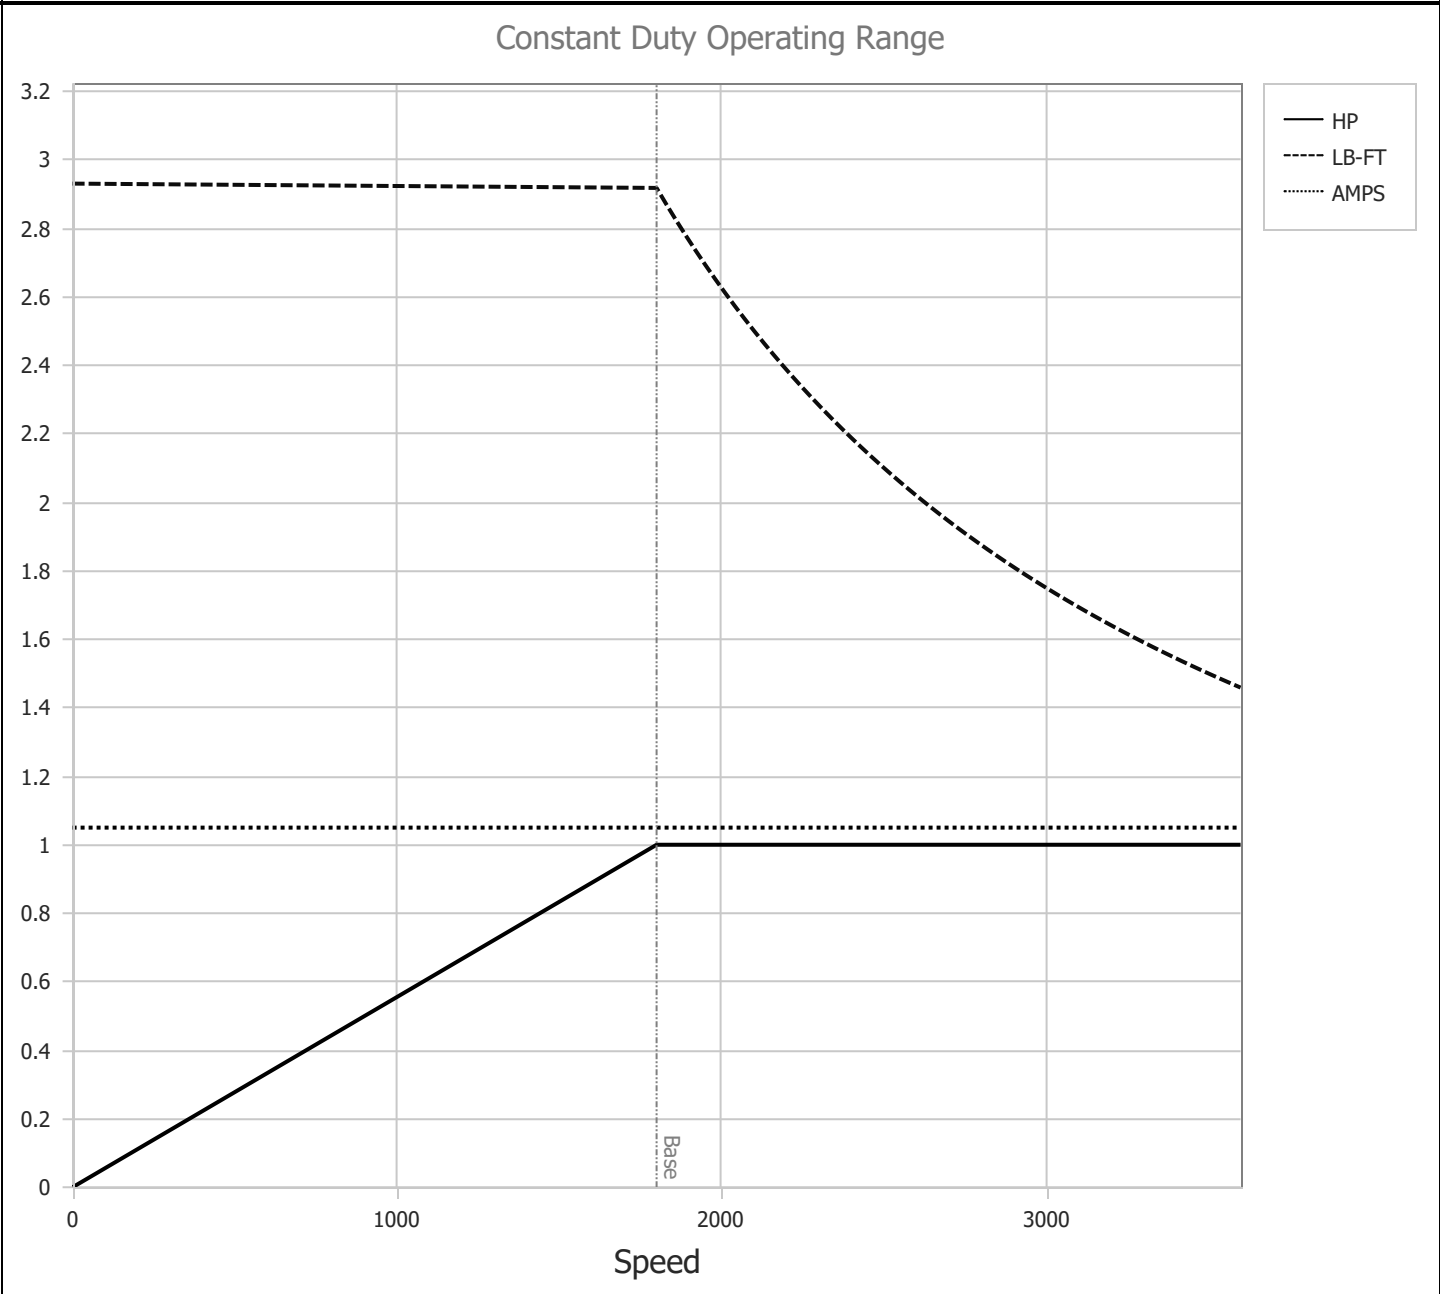

BALDOR • RELIANCE	DR By:	<u>R & D</u>	AC MOTOR PERFORMANCE CURVES	35WGG965 35-0000-1623 <i>Test - 111577</i>
	CK By:	<u>USTOSAN</u>		
	APP By:	<u>USWEQUA1</u>		
	Date:	<u>11/14/2024</u>		