

Volts	460	Max RPM	4000	Conn Diag.	CD0006	Leads	3
Amps	9.0	Max Amps		Cs Diagram	CS1126	BEMF	212
HP	7.5	VFD#	ECI4A9P5			LD	25
RPM	1800	S.F.	1.00			LQ	91.6
Phase/Hz	3/60	Rating	40C AMB			Rs	1.3196 Meas. L-L

60034-2-3 Motor Performance at Standardized Operating Points

	RPM	% Speed	LB-FT	% Torque	HP	Efficiency	Loss (% FL)	Watts Loss (W)
P1	1620	90%	21.9	100%	6.8	92.4	7.39%	418
P2	901	50%	21.9	100%	3.8	90.5	5.23%	296
P3	451	25%	22.0	100%	1.9	85.2	4.31%	244
P4	1623	90%	10.9	50%	3.4	92.9	3.43%	194
P5	902	50%	10.9	50%	1.9	90.9	2.48%	140
P6	902	50%	5.5	25%	0.9	89.3	1.49%	84
P7	451	25%	5.5	25%	0.5	85.1	1.08%	61


61800-9-2 PDS Performance at Reference Operating Points

	RPM	% Speed	LB-FT	% Torque	HP	System Efficiency	Loss (% FL)	Watts Loss (W)
P1	1802	100%	21.9	100%	7.5	91.5	9.22%	522
P2	901	50%	21.9	100%	3.8	87.1	7.36%	416
P3	300	17%	21.9	100%	1.3	73.5	5.95%	337
P4	1803	100%	10.9	50%	3.8	91.1	4.85%	275
P5	902	50%	10.9	50%	1.9	87.1	3.65%	207
P6	300	17%	10.9	50%	0.6	74.3	2.85%	161
P7	902	50%	5.5	25%	0.9	84.6	2.25%	128
P8	300	17%	5.5	25%	0.3	70.8	1.70%	96

Points not taken in certified order.

BALDOR • RELIANCE	DR By:	<u>R & D</u>	AC MOTOR PERFORMANCE CURVES	36WGL111 36T258L111G1 Test - 111285
	CK By:	<u>USTOSAN</u>		
	APP By:	<u>USJAROB1</u>		
	Date:	<u>09/12/2024</u>		

Volts	460	Max RPM	4000	Conn Diag.	CD0006	Leads	3
Amps	9.0	Max Amps		Cs Diagram	CS1126	BEMF	212
HP	7.5	VFD #	ECI4A9P5			LD	25
RPM	1800	S.F.	1.00			LQ	91.6
Phase/Hz	3/60	Rating	40C AMB			Rs	1.3196 Meas L-L

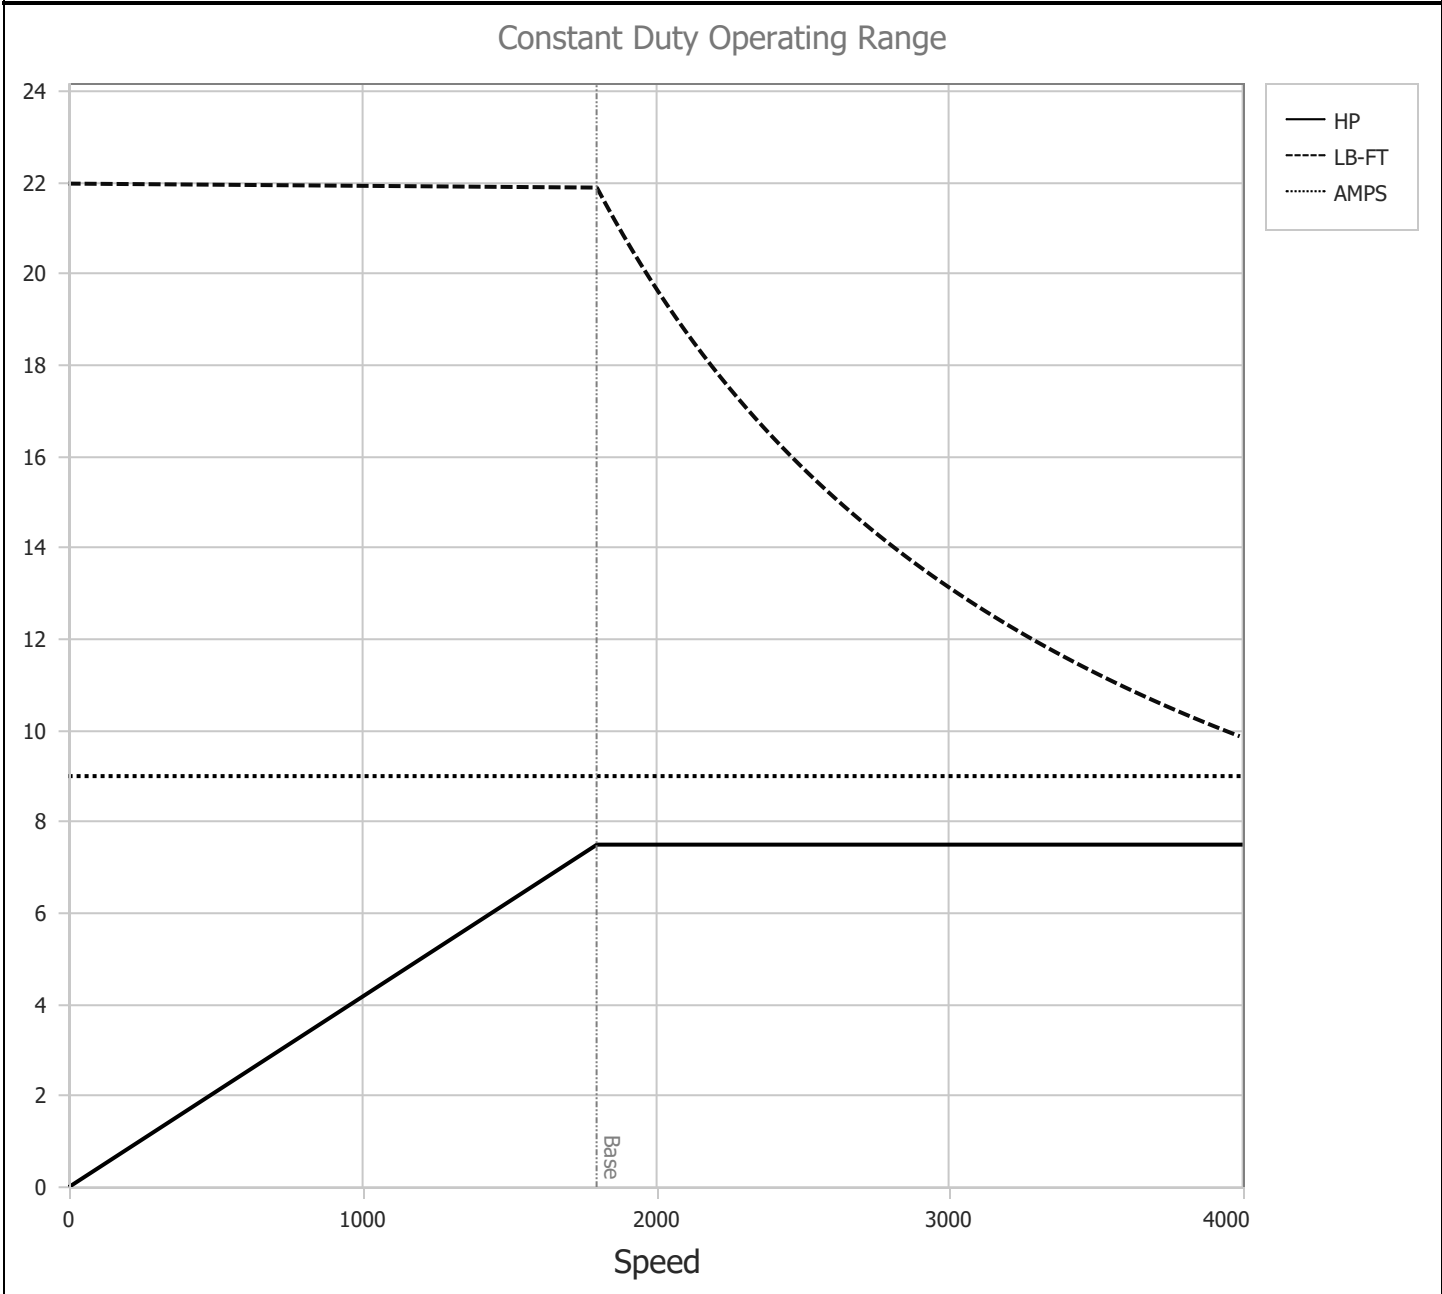

	DR By:	<u>R & D</u>	AC MOTOR PERFORMANCE CURVES	36WGL111 36T258L111G1 <i>Test - 111285</i>
	CK By:	<u>USTOSAN</u>		
	APP By:	<u>USJAROB1</u>		
	Date:	<u>09/12/2024</u>		