

REL. S.O.	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	405HPZ	100	P	3/60	1785	230/460
AMPS	DUTY	AMB °C/ INSUL.	S.F.	NEMA DESIGN	CODE LETTER	ENCL.
224/112	CONT	40/F	1.00	B	G	TEFC
E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)		
596956	418142-33RE	---	---	.0123/.0492		
PERFORMANCE						
LOAD	HP	AMPERES	RPM	% POWER FACTOR	% EFFICIENCY	
NO LOAD	0	28.6	1800	5.49	0	
1/4	25.0	39.2	1796	64.3	93.0	
2/4	50.0	59.5	1792	82.5	95.4	
3/4	75.0	84.6	1788	86.7	95.7	
4/4	100	112	1783	87.4	95.4	
5/4	125	141	1778	87.3	94.9	
SPEED TORQUE						
		RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES	
LOCKED ROTOR		0	151	445	725	
PULL UP		360	136	400	706	
BREAKDOWN		1721	250	735	382	
FULL LOAD		1783	100	295	112	
AMPERES SHOWN FOR 460. VOLT CONNECTION. IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE						
REMARKS: TYPICAL DATA NEMA NOM. EFF. 95.4 PCT						
		DR. BY G. R. WEBB		A-C MOTOR PERFORMANCE A40WG0692-R016 DATA ISSUE DATE 11/07/19		
		CK. BY W. L. SMITH				
		APP. BY E. J. CHRISTIAN				
		DATE 09/29/15				

REL S.O.

FRAME 405HPZ

HP 100

TYPE P

PHASE/HERTZ 3/60

RPM 1785

VOLTS 230/460

AMPS 224/112

DUTY CONT

AMB °C/INSUL 40/F

S.F. 1.00

NEMA DESIGN B

CODE LETTER G

ENCLOSURE TEFC

E/S 596956


ROTOR 418142-33RE

TEST S.O. TYPICAL DATA

TEST DATE ---

STATOR RES. @ 25 °C .0123/.0492

OHMS (BETWEEN LINES)

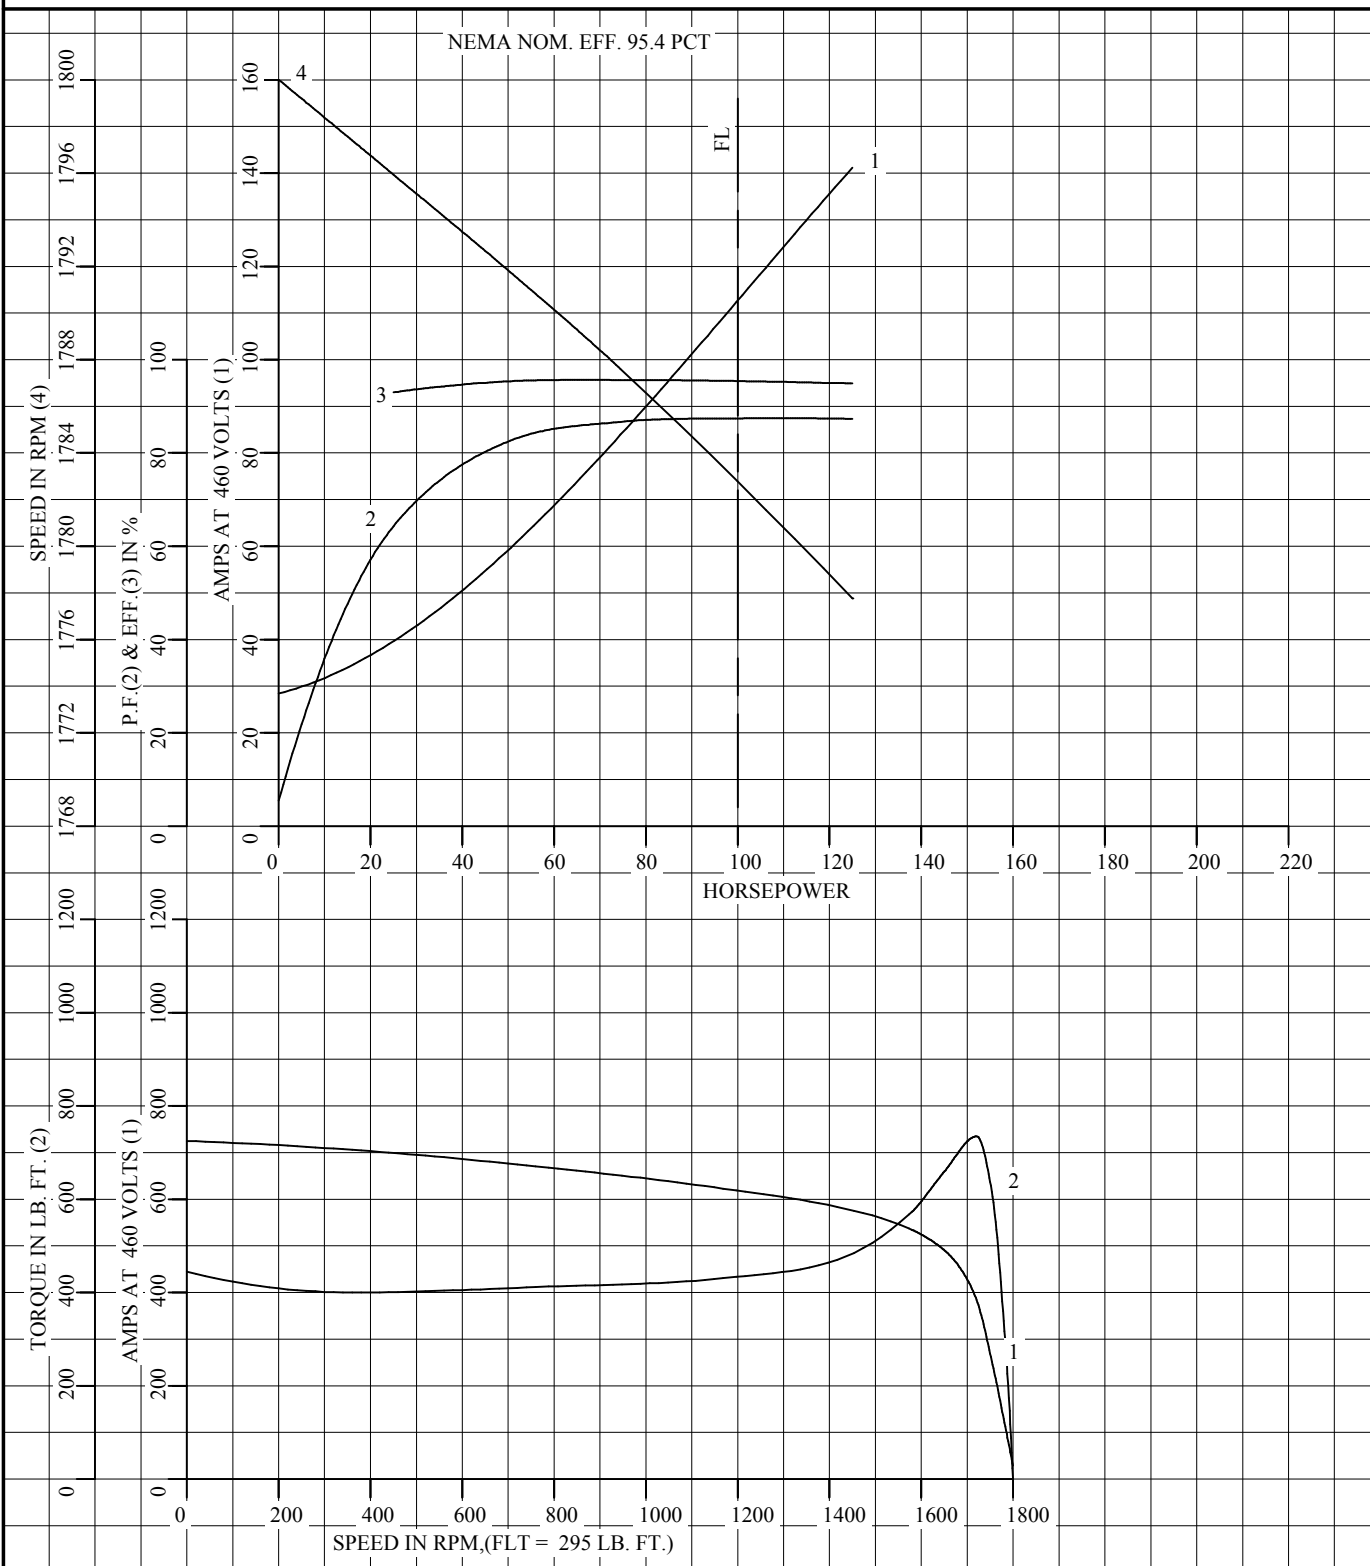

AMPERES SHOWN FOR 460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

BALDOR
A MEMBER OF THE ABB GROUP

DR. BY G. R. WEBB
CK. BY W. L. SMITH
APP. BY E.J. CHRISTIAN
DATE 09/29/15

**A-C MOTOR
PERFORMANCE
CURVES**

A40WG0692-R016

ISSUE DATE 11/07/19

REL. S.O.

FRAME 405HPZ

HP 100

TYPE P

PHASE/HERTZ 3/60

RPM 1785

VOLTS 230/460

AMPS 224/112

DUTY CONT

AMB °C/INSUL 40/F

S.F. 1.00

NEMA DESIGN B

CODE LETTER G

ENCLOSURE TEFC

E/S 596956


ROTOR 418142-33RE

TEST S.O. TYPICAL DATA

TEST DATE ---

STATOR RES. @ 25 °C .0123/.0492

OHMS (BETWEEN LINES)

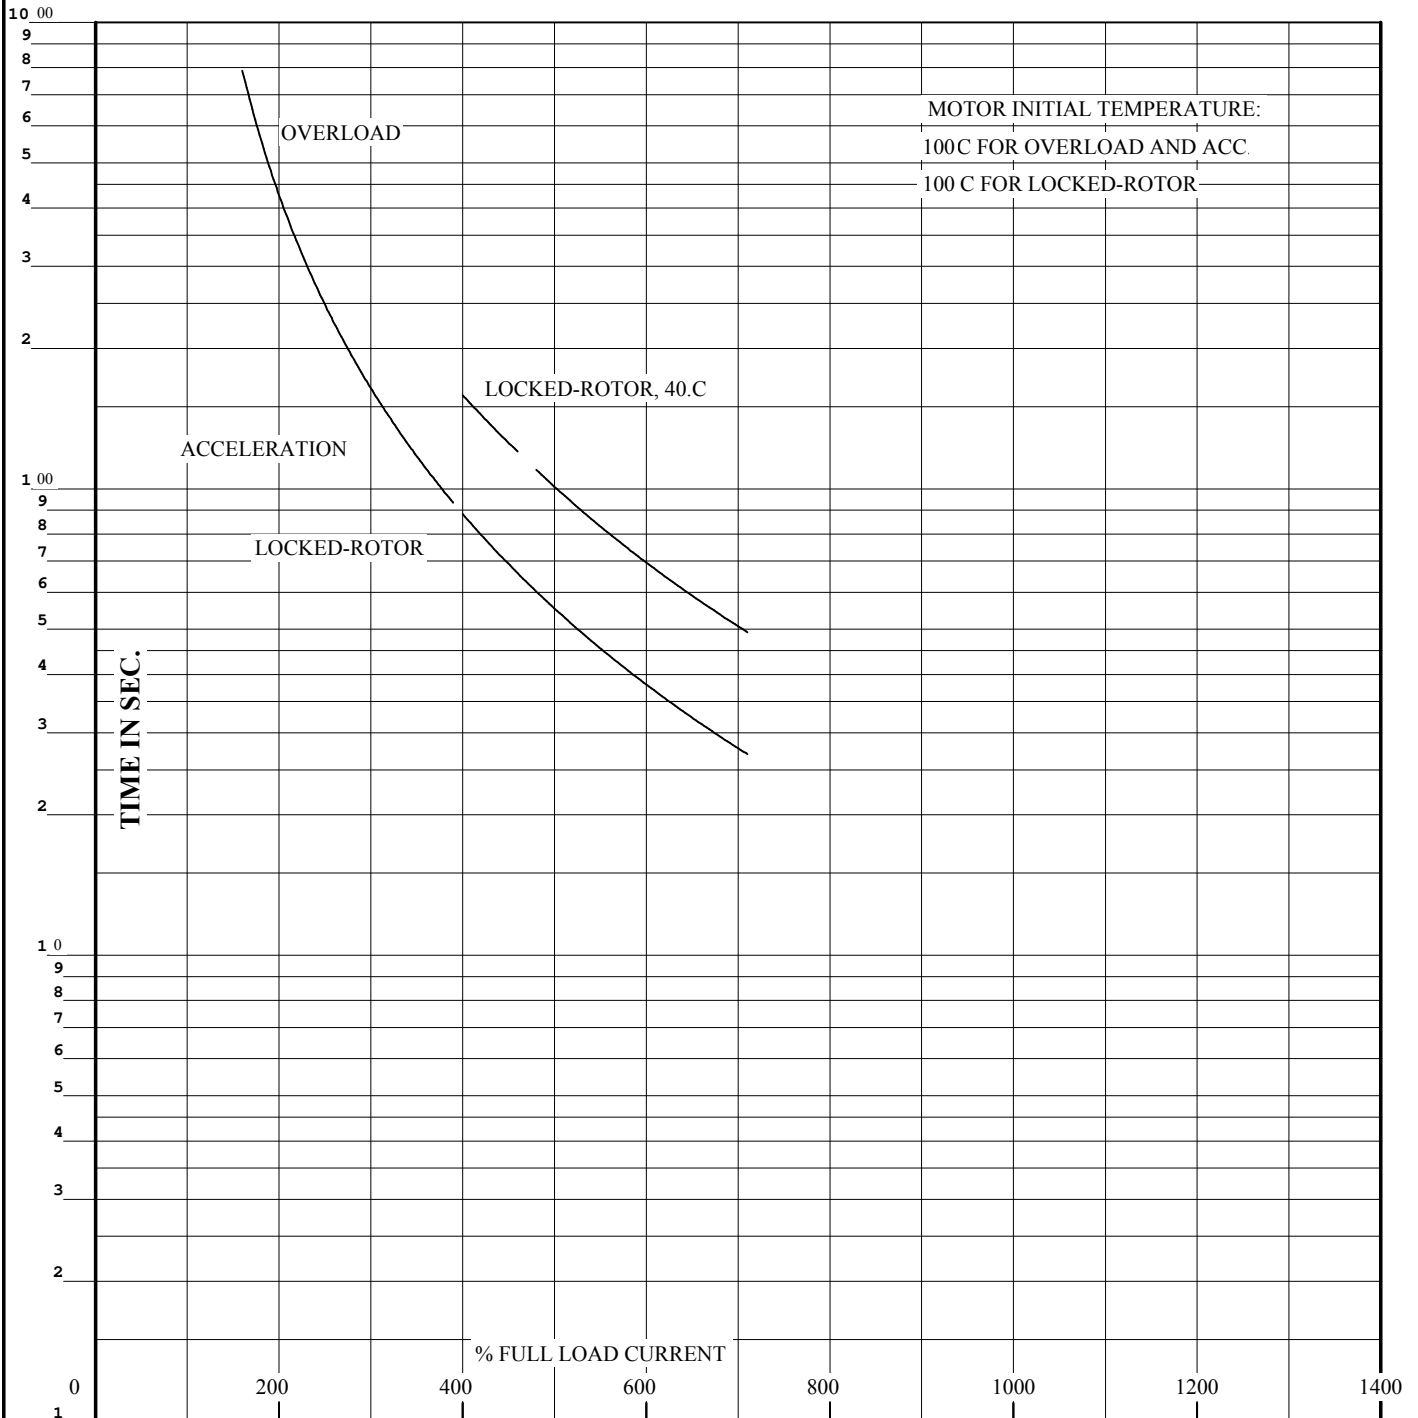

THERMAL LIMIT CURVE

REMARKS:

NEMA NOM. EFF. 95.4 PCT

AMPERES SHOWN FOR 460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE
AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

BALDOR
A MEMBER OF THE ABB GROUP

DR. BY G. R. WEBB
CK. BY W. L. SMITH
APP. BY E.J. CHRISTIAN
DATE 09/29/15

**A-C MOTOR
PERFORMANCE
CURVES**

A40WG0692-R016
ISSUE DATE 11/07/19