


S/O	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	365T	50	P	3/60	1185	460
AMPS	DUTY	AMB °C/ INSUL	S.F.	NEMA DESIGN	CODE LETTER	ENCLOSURE
61.7	CONT	40/F	1.0	B	F	TEFC
E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)		
892103	418141-71JE	---	---	.130		
PERFORMANCE						
LOAD	HP	AMPERES	RPM	% POWER FACTOR	% EFFICIENCY	
NO LOAD	0	21.3	1200	5.08	0	
1/4	12.5	26.2	1197	49.4	90.8	
2/4	25.0	35.6	1193	70.0	93.9	
3/4	37.5	47.8	1190	77.8	94.4	
4/4	50.0	61.7	1186	80.6	94.2	
5/4	62.5	76.7	1182	81.5	93.6	
SPEED TORQUE						
		RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES	
LOCKED ROTOR		0	154	340	345	
PULL UP		650	133	295	305	
BREAKDOWN		1133	230	510	191	
FULL LOAD		1186	100	221	61.7	
AMPERES SHOWN FOR 460 VOLT CONNECTION. IF OTHER CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.						
TYPICAL DATA XE MOTOR-TYPICAL DATA-NEMA NOM. EFF. 94.1 PCT. GUARANTEED MIN. EFF. 93.6 PCT.						
		DRAWN BY: <u>W. L. SMITH</u> CHECKED BY: <u>J.J.HARRISON</u> APPROVED BY: <u>W. L. SMITH</u> DATE: <u>12/07/05</u>		AC MOTOR PERFORMANCE DATA		A36WG0777-R004 DATE ISSUED 03/04/20

REL S.O.	RPM 1185	S.F. 1.0	ROTOR 418141-71JE
FRAME 365T	VOLTS 460	NEMA DESIGN B	TEST S.O. TYPICAL DATA
HP 50	AMPS 61.7	CODE LETTER F	TEST DATE ---
TYPE P	DUTY CONT	ENCLOSURE TEFC	STATOR RES. @ 25°C .130
PHASE / HERTZ 3/60	AMB °C / INSUL 40/F	E/S 892103	OHMS (BETWEEN LINES)



AMPERES SHOWN FOR 460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

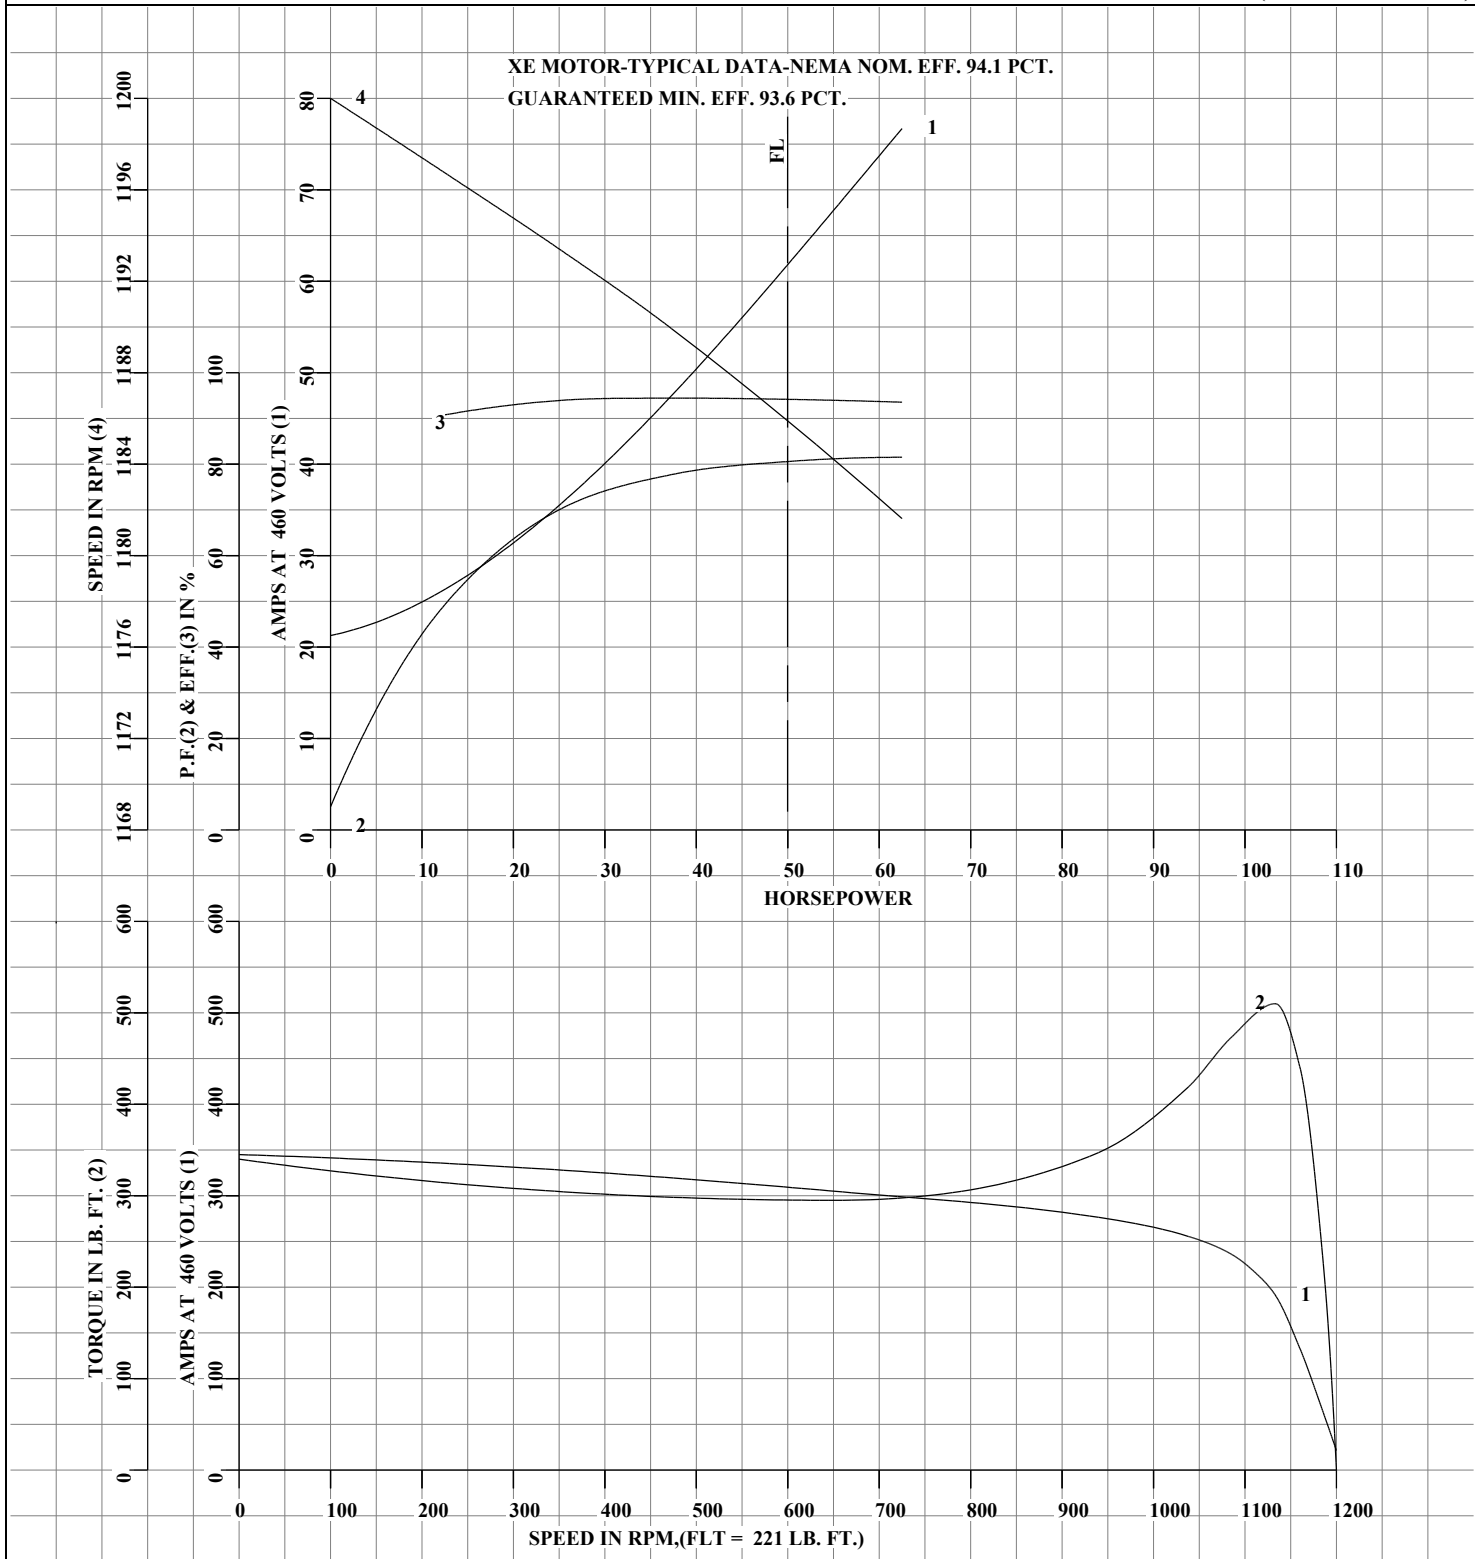

DRAWN BY: W. L. SMITH
 CHECKED BY: J.J.HARRISON
 APPROVED BY: W. L. SMITH
 DATE: 12/07/05

AC MOTOR
 PERFORMANCE
 DATA

A36WG0777-R004

ISSUE DATE 03/04/2014