

Volts	190/380	Max RPM	3000	Conn Diag.	CD0005A25	Leads	9
Amps	13.6/6.8	Max Amps		Cs Diagram	CS0576	BEMF	105/210
KW	4	VFD#	ACS380-040S-09			LD	13.5/54.0
RPM	1500	S.F.	1.00			LQ	47.8/191.0
Phase/Hz	3/50	Rating	40C AMB-S1			Rs	3.3231 Meas. L-L

60034-2-3 Motor Performance at Standardized Operating Points

	RPM	% Speed	LB-FT	% Torque	KW	Efficiency	Loss (% FL)	Watts Loss (W)
P1	1350	90%	18.8	100%	4.8	90.4	9.48%	383
P2	750	50%	18.8	100%	2.7	86.5	7.72%	312
P3	375	25%	18.8	100%	1.3	78.3	6.87%	278
P4	1350	90%	9.4	50%	2.4	92.4	3.67%	149
P5	750	50%	9.4	50%	1.3	89.2	2.98%	121
P6	750	50%	4.7	25%	0.7	89.8	1.40%	57
P7	375	25%	4.7	25%	0.3	84.7	1.12%	45


61800-9-2 PDS Performance at Reference Operating Points

	RPM	% Speed	LB-FT	% Torque	KW	System Efficiency	Loss (% FL)	Watts Loss (W)
P1	1500	100%	18.8	100%	5.4	87.9	13.58%	549
P2	750	50%	18.8	100%	2.7	84.1	9.35%	378
P3	255	17%	18.8	100%	0.9	67.7	8.02%	324
P4	1500	100%	9.4	50%	2.7	91.1	4.85%	196
P5	750	50%	9.4	50%	1.3	86.1	3.99%	162
P6	255	17%	9.4	50%	0.5	71.8	3.30%	133
P7	750	50%	4.7	25%	0.7	85.2	2.14%	87
P8	255	17%	4.7	25%	0.2	71.1	1.71%	69

Points not taken in certified order.

BALDOR • RELIANCE	DR By:	<u>R & D</u>	AC MOTOR PERFORMANCE CURVES	36WGA0020 36-0000-3634 Test - 112234
	CK By:	<u>USGAHIL</u>		
	APP By:			
	Date:	<u>04/09/2025</u>		

Volts	190/380	Max RPM	3000	Conn Diag.	CD0005A25	Leads	9
Amps	13.6/6.8	Max Amps		Cs Diagram	CS0576	BEMF	105/210
KW	4	VFD #	ACS380-040S-09			LD	13.5/54.0
RPM	1500	S.F.	1.00			LQ	47.8/191.0
Phase/Hz	3/50	Rating	40C AMB-S1			Rs	3.3231 Meas L-L

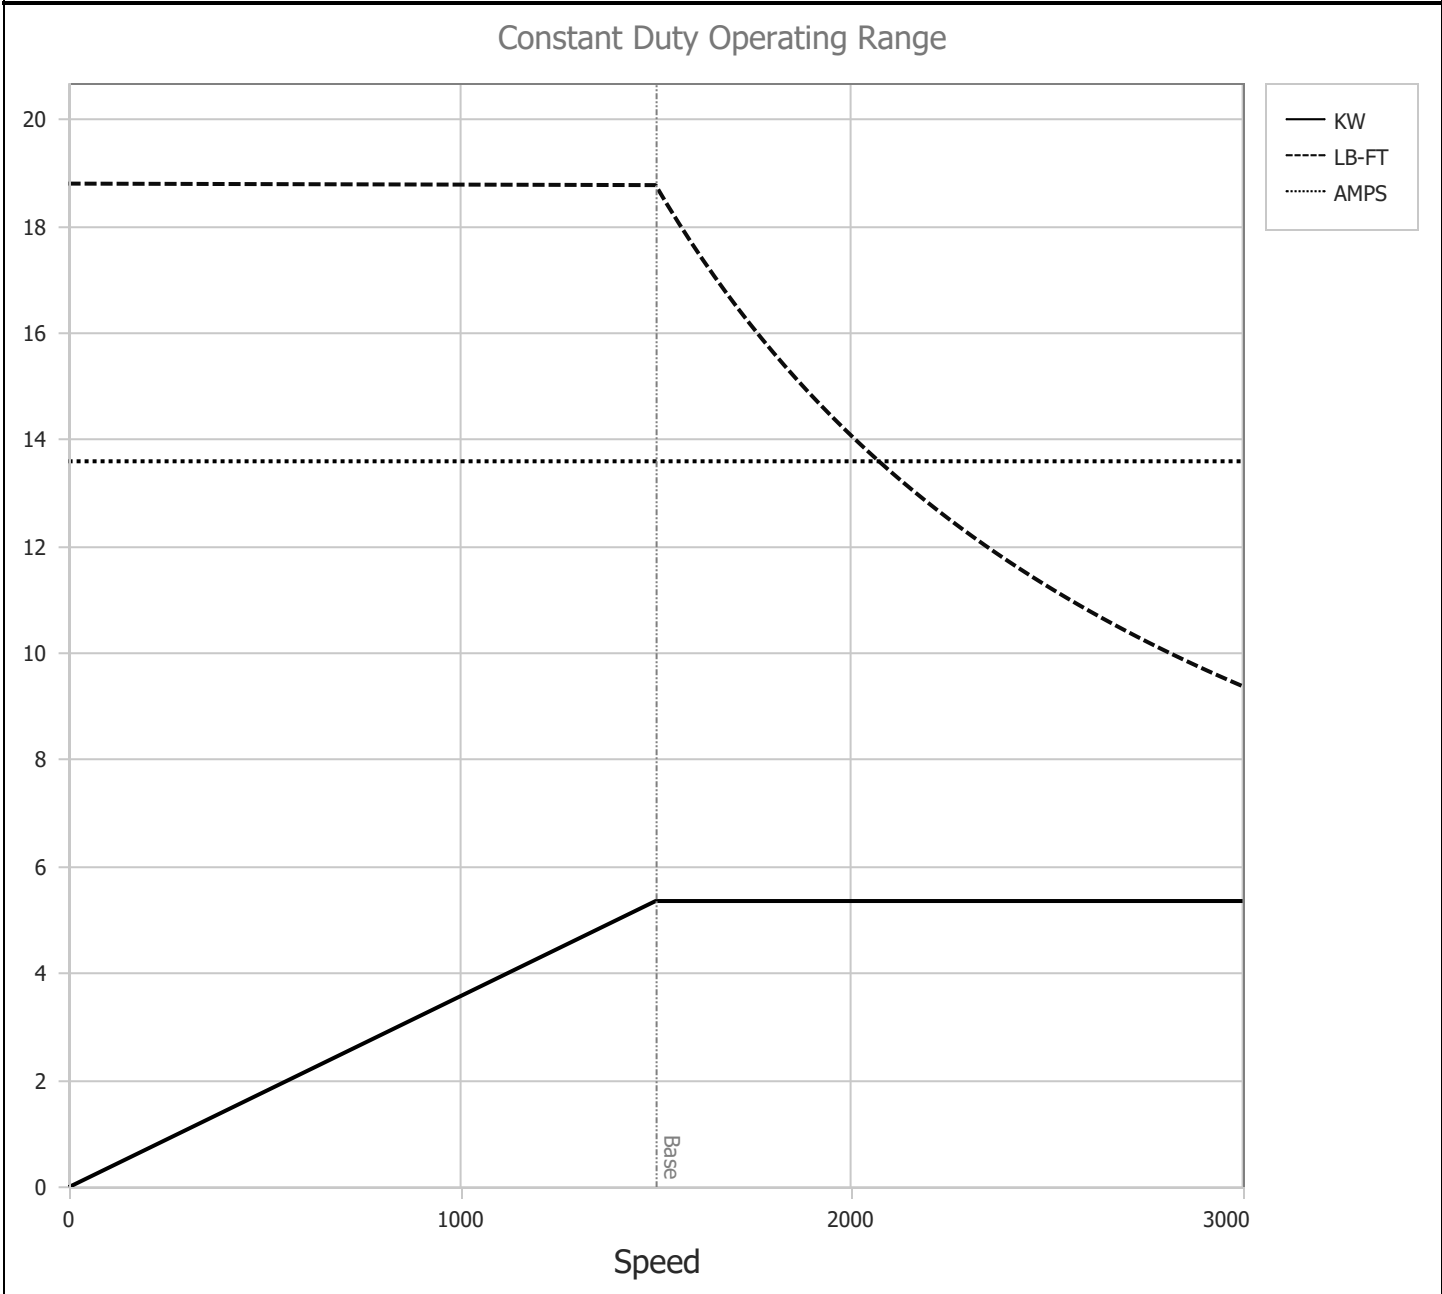

BALDOR • RELIANCE	DR By:	<u>R & D</u>	AC MOTOR PERFORMANCE CURVES	36WGA0020 36-0000-3634 <i>Test - 112234</i>
	CK By:	<u>USGAHIL</u>		
	APP By:			
	Date:	<u>04/09/2025</u>		