

ABB BALDOR RELIANCE III

Customer information packet

EM2543T-5

50HP, 1775RPM, 3PH, 60HZ, 326T, 4256M, OPSB, F1

Specifications

Enclosure	OPSB
Frame	326T
Frame Material	Steel
Frequency	60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	50.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	NEMA PREMIUM NEMA PREMIUM (OLD LOGO) CURUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	46.000 A @ 575.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	94.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	46.0 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	G

Part Detail

Revision	AK
Type	AC
Mech. spec.	42F56
Base	
Status	PRD/A
Elec. spec.	42WGW476
Layout	42LYF056
Eff. date	06-27-2024
CD Diagram	CD0006
Poles	04
Leads	3#8
Proprietary	False
Created date	01-01-0001

Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 8 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	4256M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	27.69 IN
Power Factor	87
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	2.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1775 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3554L											
CAT.NO.	EM2543T-5			P/N						ENCL	OPSB
SPEC.	42F056W476	CC	010A	FRAME		326T	SER.NO.				
HP	50		CLASS		F	HZ	60				
RPM	1775		PH	3	DES		A				
VOLTS	575			CODE		G	ODE BRG		6311	DE BRG	6312
AMPS	46										
RATING	40C AMB-CONT		NEMA-NOM-EFF			94.5	GREASE		POLYREX EM		
PF	87	SER.F.	1.15	VPWM INVERTER READY							
HTR-VOLTS	HTR-AMPS	MAX. SPACE HEATER TEMP.									

Parts List

Part number	Description	Quantity
SA049064	SA 42F056W476	1.000 ea
RA044088	RA 42F056W476	1.000 ea
HA6360	LIFTING LUG FOR 42 FRAME MOTORS.	2.000 ea
HA6017	CAST ADAPTER, 40,42 KOBX	1.000 ea
19XW3118A12	.31-18 X .75 HEX WASHER HEAD TAPTITE II	2.000 ea
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	2.000 ea
WD1000B25	GND LUG, BURNDY L125HP OR T&B L125HP-BB	1.000 ea
19XW3118G08	.31-18X.50,HEX WSHR HD,TAPTITE 2,GREEN	1.000 ea
10CB3001	CONDUIT BOX CAST W/2.500 LEAD HOLE	1.000 ea
19XW3118A12	.31-18 X .75 HEX WASHER HEAD TAPTITE II	4.000 ea
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	4.000 ea
42EP3200A01	FR ENDPLATE, MACH	1.000 ea
HW5100A13	W4627-047 WVY WSHR	1.000 ea
42EP3200B02	PU ENDPLATE, MACH	1.000 ea
XY5013A12	NUT,1/2-13,HEX,STEEL,ZINCPLATED	8.000 ea
10CB3500SP	CONDUIT BOX LID, CAST	1.000 ea
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	4.000 ea
HW2501H33	KEY, 1/2 SQ X 3.875	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 ea
42AD2001A01	BAFFLE PLATE 42 OPEN, SLOTTED BAND MTRS	1.000 ea
HW4500A03	GREASE FITTING, .125 NPT 1610(ALEMITE) 8	1.000 ea
HW4500A20	1/8NPT SL PIPE PLUG	1.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.030 lb
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 ea
42AD2001A01	BAFFLE PLATE 42 OPEN, SLOTTED BAND MTRS	1.000 ea
HW4500A03	GREASE FITTING, .125 NPT 1610(ALEMITE) 8	1.000 ea
HW4500A20	1/8NPT SL PIPE PLUG	1.000 ea
MG1050Y01	CELEROL BALDOR GOLD *5 GALLON BUCKET*	0.080 ga
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	4.000 ea
HA3151A03	THRUBOLT STUD 1/2-13 X 20.5	4.000 ea

LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
LC0006	CONNECTION LABEL	1.000 ea
NP3554L	SS SUPER-E,CURUS-EEV,NEMA PREM,CC,300 SR	1.000 ea
40PA1000	PACKAGING GROUP	1.000 ea

Accessories

Part number	Description	Multiplier
42-1300	C FACE KIT	A8
42EP1601A01	SP'L D-FLANGE MTD. PU. E.P. MDL.42 W/BFL	P1

AC Induction Motor Performance Data

Record # 13695

Typical performance - not guaranteed values

Winding: 42WGW476-R001			Type: 4256M		Enclosure: OPSB		
Nameplate Data			575 V, 60 Hz: Single Voltage Motor				
Rated Output (HP)		50	Full Load Torque		148 LB-FT		
Volts		575	Start Configuration		direct on line		
Full Load Amps		46	Breakdown Torque		423 LB-FT		
R.P.M.		1775	Pull-up Torque		234 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		282 LB-FT	
NEMA Design Code		A	KVA Code	G	Starting Current		305 A
Service Factor (S.F.)		1.15	No-load Current		16.5 A		
NEMA Nom. Eff.		94.5	Power Factor	87	Line-line Res. @ 25°C		0.194 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		36°C	
S.F. Amps				Temp. Rise @ S.F. Load		42°C	
				Locked-rotor Power Factor		27.1	
				Rotor inertia		7.46 LB-FT2	

Load Characteristics 575 V, 60 Hz, 50 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	47	69	79	86	86	85	86
Efficiency	90	93.5	94.4	94.5	94.3	94	94.4
Speed	1795	1790	1785	1780	1774	1768	1776
Line amperes	22.5	29.2	37.7	46	58	70	53.2

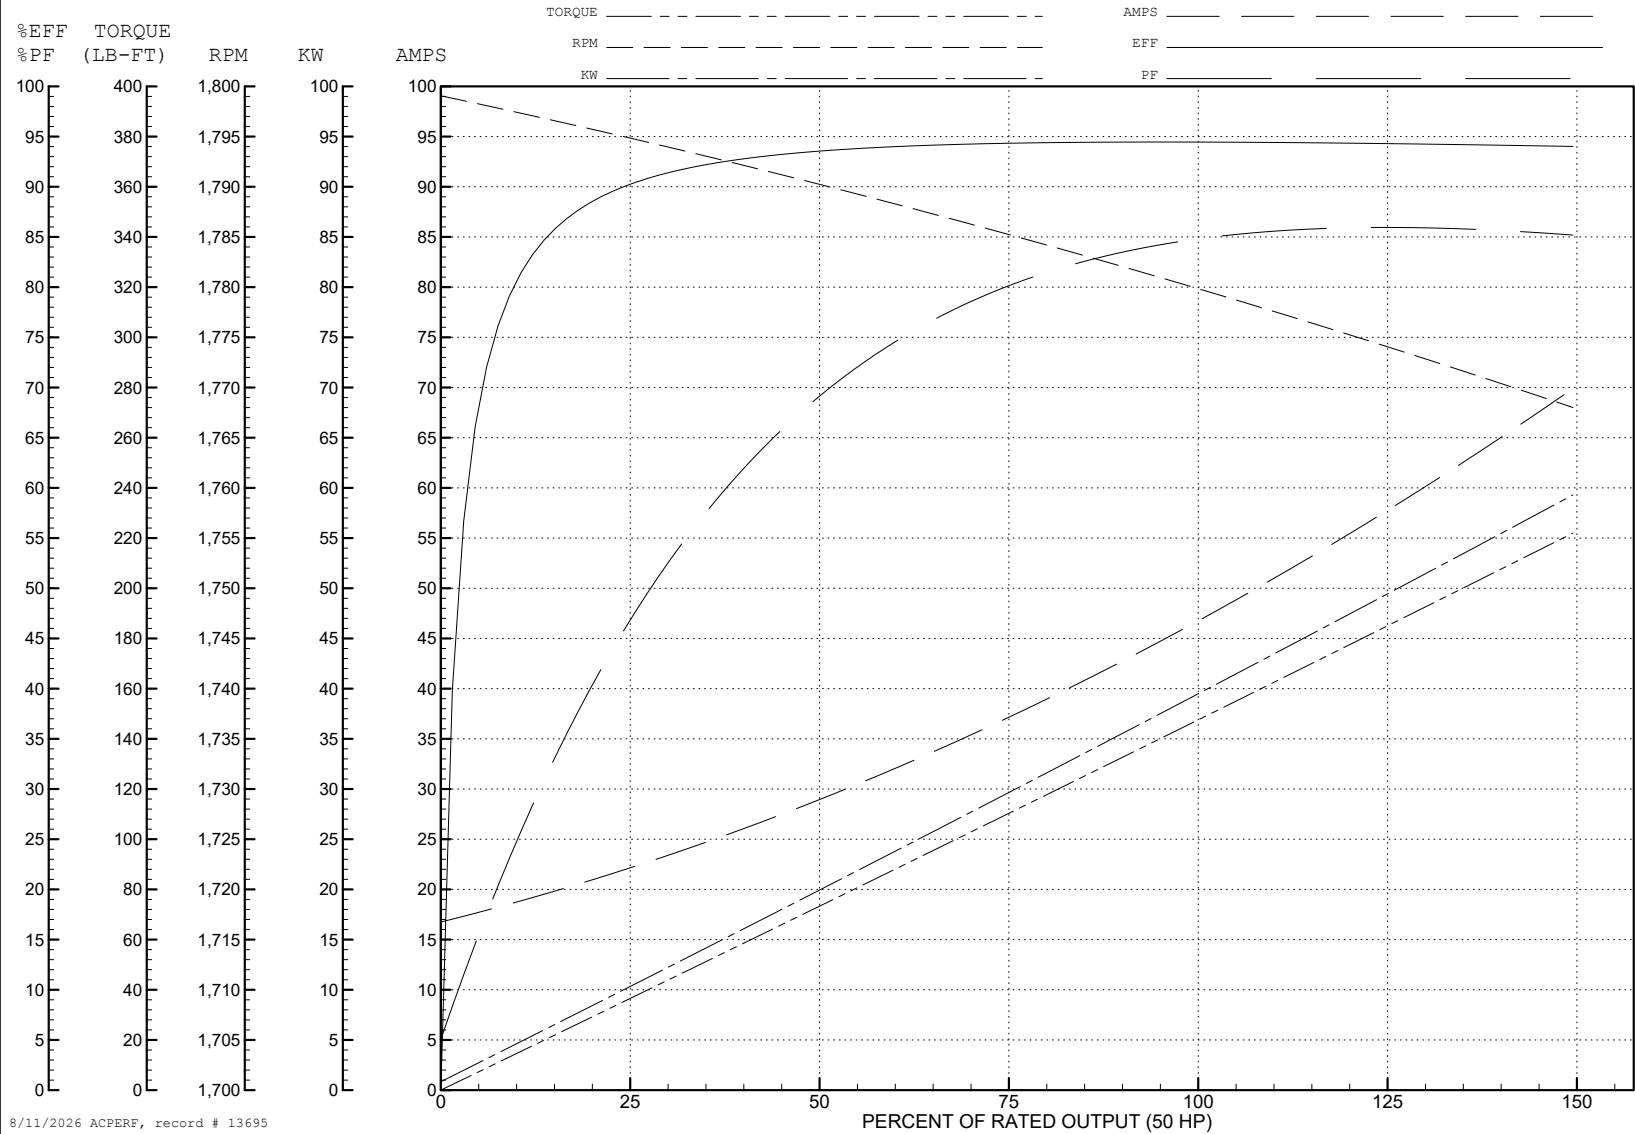
ABB Motors and Mechanical Inc.

WINDING # 42GW476

Typical performance - not guaranteed values.


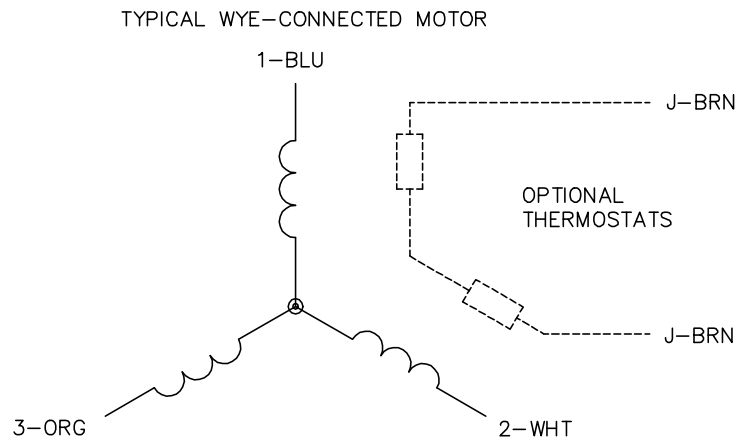
50 HP 3 PH 60 HZ 1775 RPM 575 V 4256M

TORQUES (LB-FT): PO=423 PU=234 LR=282 LRA=305





CD0006


NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007

REV. LTR: E

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\141

REVISED: 10:24:49 02/19/2019

BY: ENBRIRO

MTL: -


BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1