

ABB BALDOR RELIANCE III

Customer information packet

M1223T

3/1.3HP, 1725/1140RPM, 3PH, 60HZ, 184T, 3634M

Class - None

Division - Not Applicable

Specifications

Enclosure	OPEN
Frame	184T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	3.000 HP @ 60 HZ 1.300 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	4.000 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	2.6 a
Insulation Class	F
Inverter Code	Not Inverter

Part Detail

Revision	AC
Type	AC
Mech. spec.	36B001
Base	
Status	PRD/A
Elec. spec.	36WGY048
Layout	36LYB001
Eff. date	10-30-2025
CD Diagram	CD0013
Poles	04/06
Leads	6#16
Proprietary	False
Created date	01-01-0001

KVA Code	G
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	6 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3634M
Mounting Arrangement	F1
Number of Poles	4
	6
Overall Length	15.00 IN
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1140 rpm
	1725 rpm
Speed Code	2S-2W-VT
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Page 4 of 12

Parts List

Part number	Description	Quantity
SA034238	SA 36B01Y48	1.000 ea
RA030266	RA 36B01Y48	1.000 ea
36CB3004	36 CB CASTING W/1.09 DIA LEAD HOLE @ 6:0	1.000 ea
51XB1016A08	10-16X 1/2HXWSSLD SERTYB	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
HW3001B01	BRASS CUP WASHER, FOR #10 SCREW	1.000 ea
36EP3204B00	MASTER ODE,205 BRG,GRSR	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
HW5100A05	WVY WSHR F/205 & 304 BRGS	1.000 ea
36EP3205D00	MASTER DE,206 BRG,1.197SH,GRSR	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
XY2520A12	1/4-20 HEX NUT, DIRECTIONAL SERRATIONS	4.000 ea
36CB4516	750LIPPED CB LID - GALVANNEAL	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 ea
HW2501E16	KEY, 1/4 SQ X 1.750	1.000 ea
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
MG1050G01	CELEROL MEDIUM CHARCOAL METALLIC GRAY	0.022 ga
HA3101A25	THRUBOLT 1/4-20 X 11.000 OHIO ROD	4.000 ea
LC0013	CONNECTION LABEL	1.000 ea
NP1256L	ALUM UL CC INDUSTRIAL MOTOR A60	1.000 ea
36PA1000	PKG GRP, PRINT PK1016A08	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
PE-0000001	ZRTG PE ASSEMBLY	1.000 ea
FE-0000001	ZRTG FE ASSEMBLY	1.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea

Accessories

Part number	Description	Multiplier
36-3403	C FACE KIT	A8
36EP1405A09SP	D-FLANGE KIT	

AC Induction Motor Performance Data

Record # 61406

Typical performance - not guaranteed values

Winding: 36WGY048-R005			Type: 3634M		Enclosure: OPEN		
Nameplate Data			460 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		3/1.3	Full Load Torque		9.2 LB-FT		
Volts		460	Start Configuration		direct on line		
Full Load Amps		4/2.6	Breakdown Torque		28 LB-FT		
R.P.M.		1725/1140	Pull-up Torque		13 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		19 LB-FT	
NEMA Design Code		B	KVA Code	G	Starting Current		24 A
Service Factor (S.F.)		1.15		No-load Current		1.5 A	
NEMA Nom. Eff.		0	Power Factor	0	Line-line Res. @ 25°C		9.82 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		52°C	
S.F. Amps				Temp. Rise @ S.F. Load		66°C	
				Locked-rotor Power Factor		65.1	
				Rotor inertia		0.319 LB-FT2	

Load Characteristics 460 V, 60 Hz, 3 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	56	77	87	90	91	89	91
Efficiency	74.3	81.5	82.4	81.2	78.7	75.2	86.9
Speed	1781	1763	1742	1718	1690	1655	3384
Line amperes	1.75	2.3	3	3.85	4.85	6.1	16.9


ABB Motors and Mechanical Inc.

WINDING # 36WGY048

Typical performance - not guaranteed values.

3 HP 3 PH 60 HZ 1718 RPM 460 V 3634M

TORQUES (LB-FT): PO=28 PU=13 LR=19 LRA=24

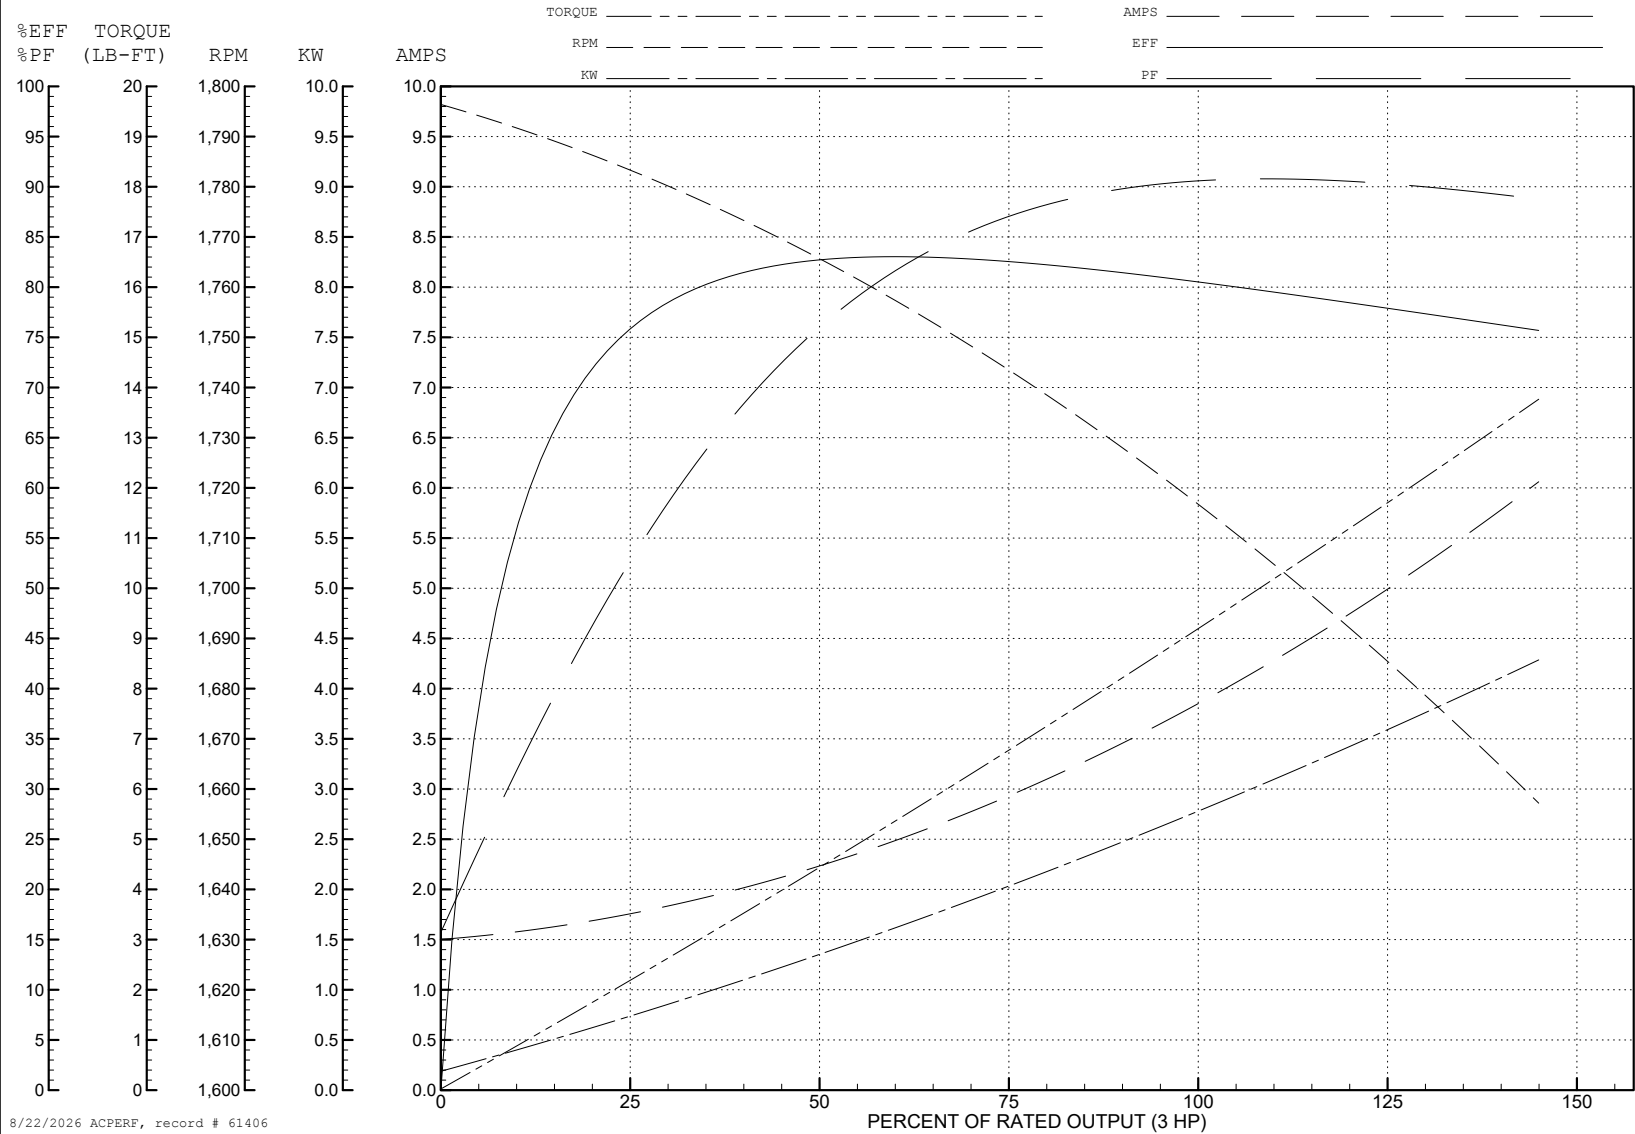

AC Induction Motor Performance Data

Record # 61407

Typical performance - not guaranteed values

Winding: 36WGY048-R005			Type: 3634M		Enclosure: OPEN			
Nameplate Data			460 V, 60 Hz: Low Speed Connection					
Rated Output (HP)		3/1.3	Full Load Torque		5.86 LB-FT			
Volts		460	Start Configuration		direct on line			
Full Load Amps		4/2.6	Breakdown Torque		20.2 LB-FT			
R.P.M.		1725/1140	Pull-up Torque		990 LB-FT			
Hz	60	Phase	3	Locked-rotor Torque		12 LB-FT		
NEMA Design Code		B	KVA Code	G	Starting Current		12.6 A	
Service Factor (S.F.)		1.15	No-load Current		1.71 A			
NEMA Nom. Eff.		0	Power Factor		0	Line-line Res. @ 25°C		17.7 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load			
					Locked-rotor Power Factor			65.1
					Rotor inertia			0.319 LB-FT2

Load Characteristics 460 V, 60 Hz, 1.3 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	31	46	59	68	75	80	72
Efficiency	57.1	70.7	75.9	77.9	78.4	77.9	78.2
Speed	1192	1184	1176	1167	1158	1147	1162
Line amperes	1.75	1.86	2.05	2.29	2.59	2.94	2.47

ABB Motors and Mechanical Inc.

WINDING # 36WGY048

Typical performance - not guaranteed values.

1.3 HP 3 PH 60 HZ 1167 RPM 460 V 3634M

TORQUES (LB-FT): PO=20.2 PU=990 LR=12 LRA=12.6

