

REL S.O.	ZDVSM3774T	VOLTS	460	ENCLOSURE	TEFC	WYE CONN EQ CKT OHMS PER PHASE			
FRAME	215TC	AMPS	12.5	MAX SAFE RPM	6000	(AT BASE RATING, 25 <sup>0</sup> C)			
HP	10	DUTY	CONT	In (AMPS)	5.1	R1	0.5070	X1	1.9720
BASE SPEED	1760	S.F.	1.0	P.F. @NL/FL	4/82	R2	0.3420	X2	1.5800
PHASE/HZ	3/60	AMB <sup>0</sup> C/INSUL	40/F	WK <sup>2</sup> (lb-ft <sup>2</sup> )	1.18			XM	48.3000

### Rated Full Load Data

	RPM	HP	Torque	Volts	Freq-Hz	Amps
Base Speed	1762	10.0	29.80	460	60	12.30
Max Speed	2655	10.1	20.05	460	90	11.98
Min Speed	0	0.0	29.00	29.70	1.27	12.30

### Load Performance at Base Speed

	RPM	HP	Torque	Volts	Freq-Hz	Amps
No Load	1799	0.0	0.00	460	60	5.10
1/4	1790	2.5	7.29	460	60	5.84
1/2	1781	5.0	14.70	460	60	7.52
3/4	1771	7.5	22.30	460	60	9.75
Full Load	1762	10.0	29.80	460	60	12.30
O/L	1740	17.2	51.80	460	60	20.75

### Blower Data

Volts	Ph/Hz	FL Amps	LR Amps	Frame	CFM

Remarks: Calculated Data  
Vector PWM Inverter Duty



DR BY Michael Williamson  
 CK BY Michael Williamson  
 APP BY Michael Williamson  
 DATE 2/4/2016


**A-C MOTOR  
 PERFORMANCE CURVES**

**07M292X776Z1**

ISSUE DATE 2/4/2016

REL S.O.	ZDVSM3774T	VOLTS	460	ENCLOSURE	TEFC	WYE CONN EQ CKT OHMS PER PHASE			
FRAME	215TC	AMPS	12.5	MAX SAFE RPM	6000	(AT BASE RATING, 25 <sup>0</sup> C)			
HP	10	DUTY	CONT	In (AMPS)	5.1	R1	0.5070	X1	1.9720
BASE SPEED	1760	S.F.	1.00	P.F. @NL/FL	4/82	R2	0.3420	X2	1.5800
PHASE/HZ	3/60	AMB <sup>0</sup> C/INSUL	40/F	WK <sup>2</sup> (lb-ft <sup>2</sup> )	1.18			XM	48.3000

Vector PWM Inverer Duty  
Variable Speed AC Motor Curves

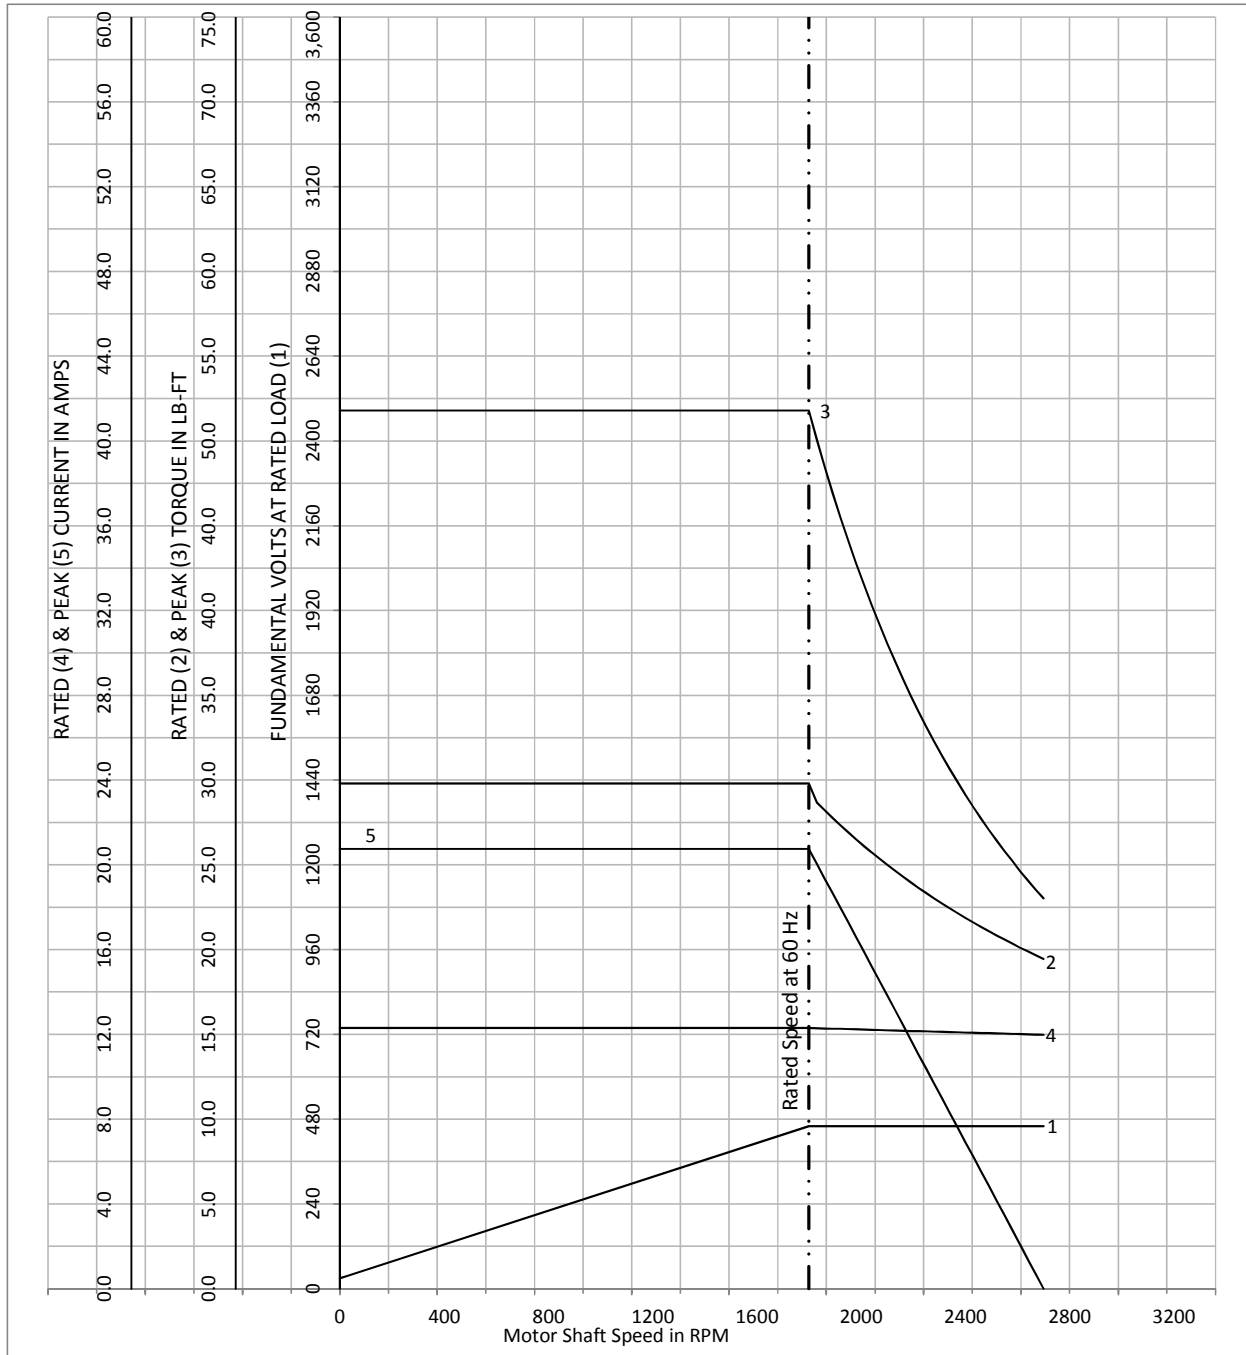

Calculated Data

Data Valid For Nameplate Speed Range only



DR BY Michael Williamson  
 CK BY Michael Williamson  
 APP BY Michael Williamson  
 DATE 2/4/2016


A-C MOTOR PERFORMANCE  
CURVES

07M292X776Z1

SH 1 of 2  
ISSUE DATE 2/4/2016

REL S.O.	ZDVSM3774T	VOLTS	460	ENCLOSURE	TEFC	WYE CONN EQ CKT OHMS PER PHASE			
FRAME	215TC	AMPS	12.5	MAX SAFE RPM	6000	(AT BASE RATING, 25 <sup>0</sup> C)			
HP	10	DUTY	CONT	In (AMPS)	5.1	R1	0.5070	X1	1.9720
BASE SPEED	1760	S.F.	1.00	P.F. @NL/FL	4/82	R2	0.3420	X2	1.5800
PHASE/HZ	3/60	AMB <sup>0</sup> C/INSUL	40/F	WK <sup>2</sup> (Lb-Ft <sup>2</sup> )	1.18			XM	48.3000

Vector PWM Inverter Duty  
Variable Speed AC Motor Curves

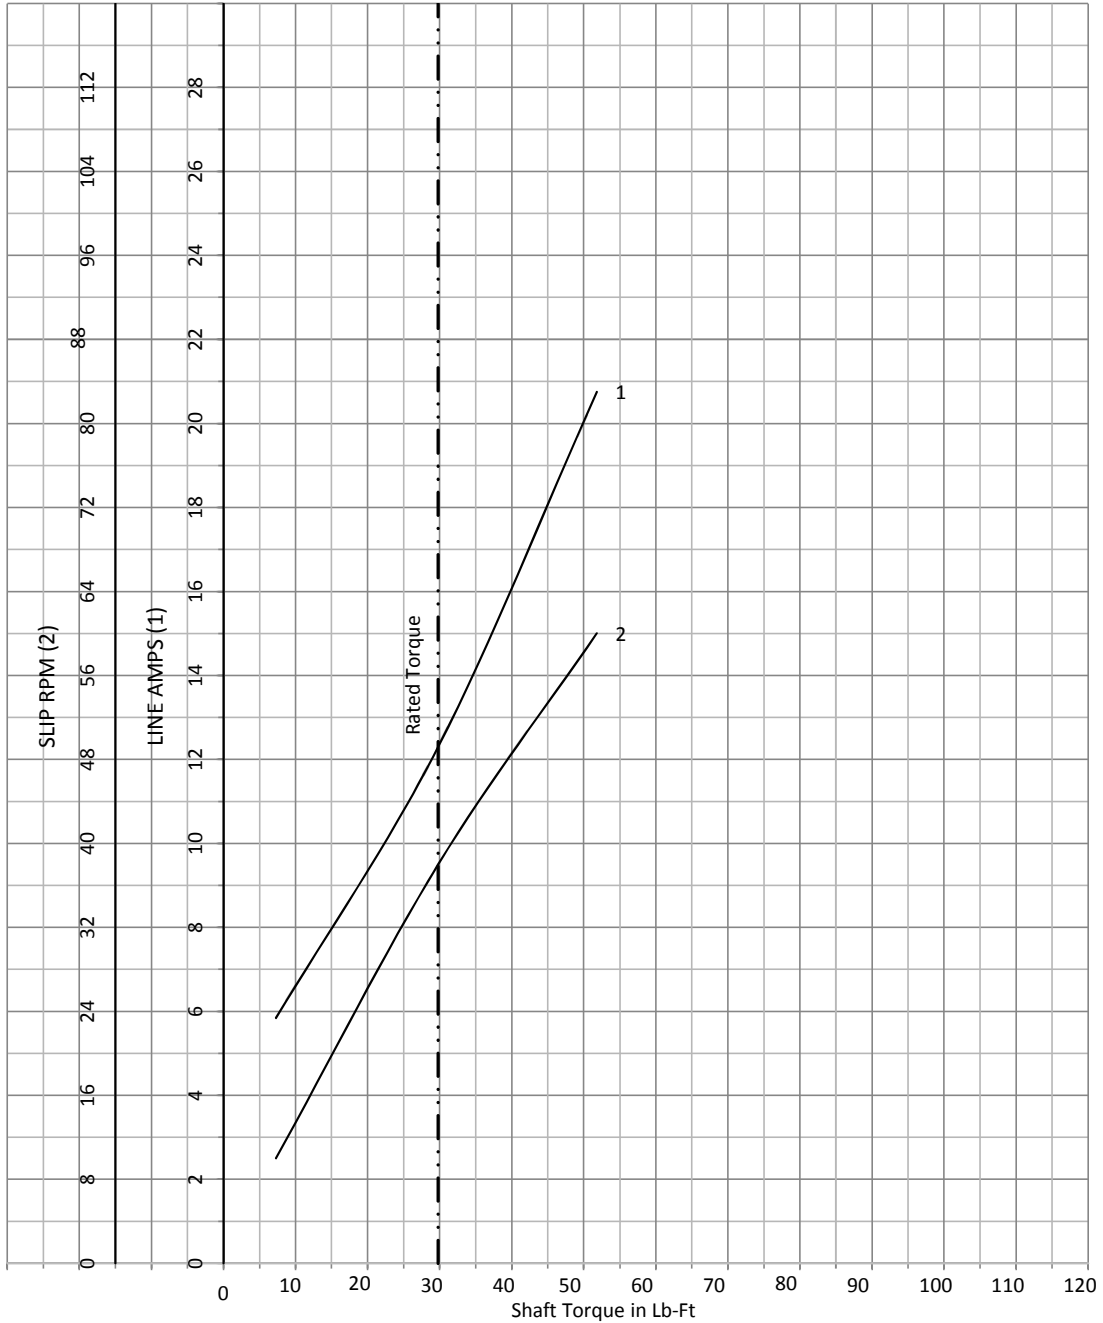

Calculated Data

Data Valid For Nameplate Speed Range only



DR BY Michael Williamson  
 CK BY Michael Williamson  
 APP BY Michael Williamson  
 DATE 2/4/2016

**A-C MOTOR PERFORMANCE  
CURVES**

**07M292X776Z1**

SH 2 of 2

ISSUE DATE 2/4/2016