

AC induction motor performance data

Record #86077 - Typical performance - not guaranteed values

Winding	07WGA0017
Type	0738M
Enclosure	TENV

Nameplate data

Rated Output				10
Volts				230/460
Full Load Amps				25/12.5
R.P.M.				1765
Hz	60	Phase		3
KVA Code				H
S.F.				1.15
NEMA Nom. Eff.	90.2	Power Factor		82
Duty				15 MIN
S.F. Amps				

460 V, 60 Hz:

High Voltage Connection

Full Load Torque	29.74 LB-FT
Start Configuration	direct on line
Breakdown Torque	83.88 LB-FT
Pull-up Torque	29.9 LB-FT
Locked-rotor Torque	45.11 LB-FT
Starting Current	87.77 A
No-load Current	4.92
Line-line Res. @ 25°C	1.25 Ω
Temp. Rise @ Rated Load	15°C
Temp. Rise @ S.F. Load	18°C
Locked-rotor Power Factor	37.1
Rotor inertia	0.934 lb-ft²

Load Characteristics 460 V, 60 Hz, 10 HP


% of Rated Load	NL	25	50	75	100	125	150	SF
Power Factor	6	47	68	78	82	84	84	83
Efficiency	0	88.1	90.8	91.9	90.9	90	88.6	90.4
Speed	1799	1792	1785	1777	1768	1758	1747	1762
Line amperes	4.92	5.73	7.53	9.86	12.49	15.44	18.79	14.3

SPEED TORQUE / SPEED CURRENT CURVES

BALDOR • RELIANCE

07WGA0017

10HP 460V 60HZ

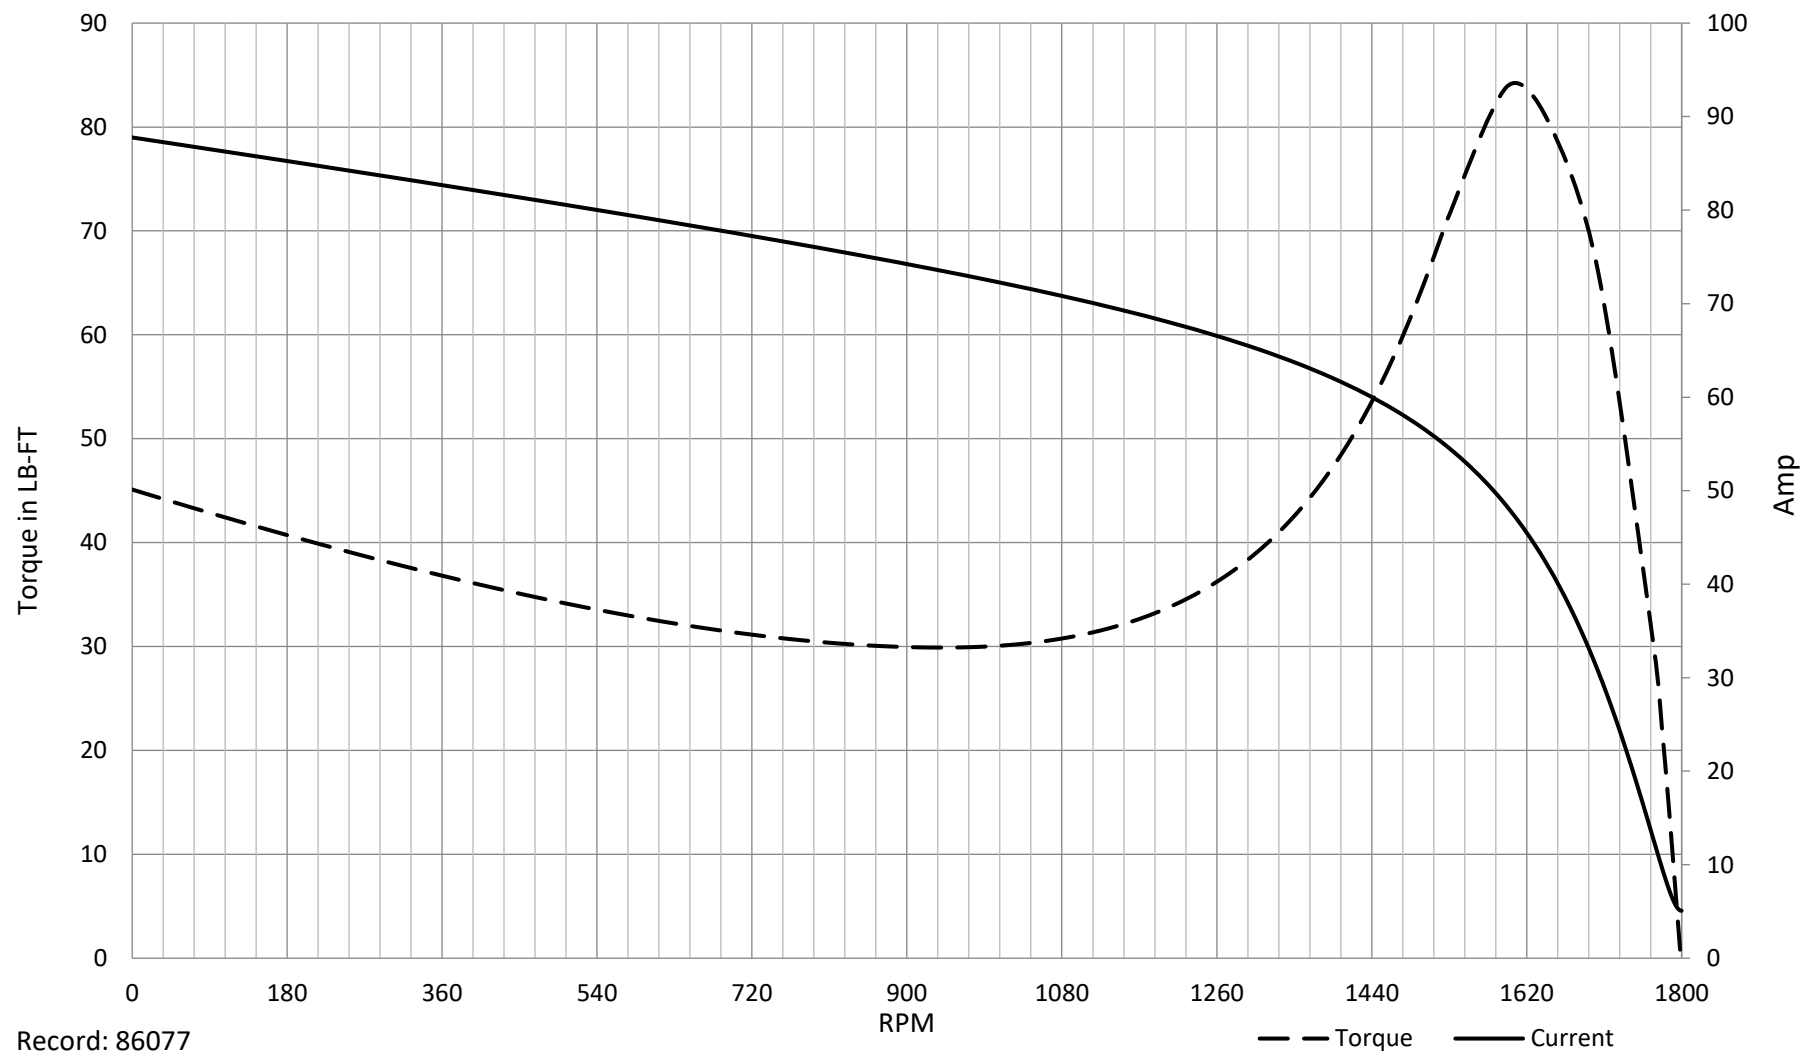

Record: 86077