

ABB BALDOR RELIANCE III

Customer information packet

ANFL3501M

.33HP, 1725RPM, 1PH, 60HZ, 48YZ, 3414L, TEFC

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	48YZ
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Induction Run
Output @ Frequency	.330 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	115.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	6.000 A @ 115.0 V 3.600 A @ 208.0 V 3.000 A @ 230.0 V
Design Code	N
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	60.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	Multiple Flats
Heater Indicator	No Heater

Part Detail

Revision	AL
Type	AC
Mech. spec.	34H317
Base	
Status	PRD/A
Elec. spec.	34WG5598
Layout	34LYH317
Eff. date	05-02-2025
CD Diagram	CD0008
Poles	04
Leads	7#18
Proprietary	False
Created date	01-01-0001

High Voltage Full Load Amps	3.0 a
Insulation Class	B
Inverter Code	Not Inverter
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	7 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3414L
Mounting Arrangement	F1
Number of Poles	4
Overall Length	12.44 IN
Power Factor	60
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Oil Burner Flange
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.35
Shaft Diameter	0.500 IN
Shaft Extension Location	Double Shaft
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1725 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	Manual Thermal Overload
Winding Thermal 1 Location	SK

Nameplate

NP1257L											
CAT.NO.	ANFL3501M										
SPEC.	34H317-5598										
HP	.33										
VOLTS	115/230										
AMP	6/3										
RPM	1725										
FRAME	48YZ			HZ	60			PH	1		
SER.F.	1.35	CODE	L	DES	N	CL	B				
NEMA-NOM-EFF	60	PF	60								
RATING	40C AMB-CONT										
CC											
DE	6203	ODE	6203								
ENCL	TEFC	SN									
	SFA 6.8/3.4										

Parts List

Part number	Description	Quantity
SA010306	SA 34H317-5598	1.000 ea
RA006698	RA 34H317-5598	1.000 ea
TPMRG57BASP	THERMAL 1PH 0.75 MAN 105C	1.000 ea
EC1189A02SP	61B2D120189NNBA ELEC CAP, 189-227MFD, 12	1.000 ea
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 ea
34GS1013SP	GASKET, CONDUIT BOX LEXIDE	1.000 ea
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
HW3001B02	BRASS CUP WASHER W/GROUND SYMBOL TAB,	1.000 ea
NS2500A02	INSULATOR, MAN THER PROT	1.000 ea
RM1014A01SP	BUTYL RUB.THRM COV. (MENA)	1.000 ea
HA6001A01	THERMAL RETAINER (PLATED)	1.000 ea
51XB1214A10	12-14 X 5/8HX WS SL SR TYBX	2.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	2.000 ea
34EP3102A167	FR ENDPLATE, UNMACHINED SWITCH BOSSES	1.000 ea
34CB4800SP	CAPACITOR COVER, STAMPED PRIMED	1.000 ea
34GS3000SP	GASKET, CAPACITOR BOX	1.000 ea
51XB1016A05	10-16X5/16HX WA SL SR TYB (F/S)	2.000 ea
HW5100A03	WAVY WASHER (W1543-017)	1.000 ea
34EP3500A01	ENDPLATE, MACH	1.000 ea
XY1032A02	10-32 HEX NUT DIRECTIONAL SERRATION	4.000 ea
34FN3002A01SP	EXTERNAL FAN, PLASTIC, .637/.639 HUB W/	1.000 ea
34FH4002A03SP	IEC FH NO GREASER W/.88 DIA SHAFT HOLE,	1.000 ea
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 ea
36CB4516	750LIPPED CB LID - GALVANNEAL	1.000 ea
37GS1001SP	GASKET, CONDUIT BOX LID, .06 THICK LEXID	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 ea
34CB3001A39P	CONDUIT BOX, MACH/PAINT	1.000 ea
MG1025C02	WILKOFASST SG, 787.105, TAN	0.014 ga
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
SP1006A01	INSULATOR MODEL 35 SWITCH	1.000 ea

HA3100A37	THRUBOLT 10-32 X 8.500	4.000 ea
SP5051B16	MDL 34 TORQ STAT SW,TYPE L , STD F1 & F2	1.000 ea
WD4006A01	WIRE JOINT,T&B RB-4 OR RB-44	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
LB1087	LABEL,MANUAL RESET (ROLL LABEL)	1.000 ea
LC0008	CONNECTION LABEL	1.000 ea
NP1257L	ALUM UL CC THERMAL REV MTG	1.000 ea
35PA1066	PKG GRP, PRINT PK1008A07	1.000 ea
PK3083	STYROFOAM PACKING CRADLE	1.000 ea
PK3088	MICROFOAM, 8"X"8 PERF. SHEETS	1.000 ea

AC Induction Motor Performance Data

Record # 6786

Typical performance - not guaranteed values

Winding: 34WG5598-R001			Type: 3414L		Enclosure: TEFC	
Nameplate Data				230 V, 60 Hz: High Voltage Connection		
Rated Output (HP)		.33		Full Load Torque		1 LB-FT
Volts		115/230		Start Configuration		direct on line
Full Load Amps		6/3		Breakdown Torque		2.95 LB-FT
R.P.M.		1725		Pull-up Torque		2.55 LB-FT
Hz	60	Phase	1	Locked-rotor Torque		3.6 LB-FT
NEMA Design Code		N	KVA Code	Starting Current		13 A
Service Factor (S.F.)		1.35		No-load Current		2.6 A
NEMA Nom. Eff.		60	Power Factor	Line-line Res. @ 25°C		6.32 Ω A Ph 4.93 Ω B Ph
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		59°C
S.F. Amps		6.8/3.4		Temp. Rise @ S.F. Load		73°C

Load Characteristics 230 V, 60 Hz, 0.33 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	31	41	52	60	67	73	71
Efficiency	33	41	52	60	61.5	61.5	61.5
Speed	1780	1760	1745	1725	1705	1680	1690
Line amperes	2.6	2.7	2.8	3	3.3	3.7	3.4


ABB Motors and Mechanical Inc.


WINDING # 34WG5598

Typical performance - not guaranteed values.


0.33 HP 1 PH 60 HZ 1725 RPM 230 V 3414L

TORQUES (LB-FT): PO=2.95 PU=2.55 LR=3.6 LRA=13

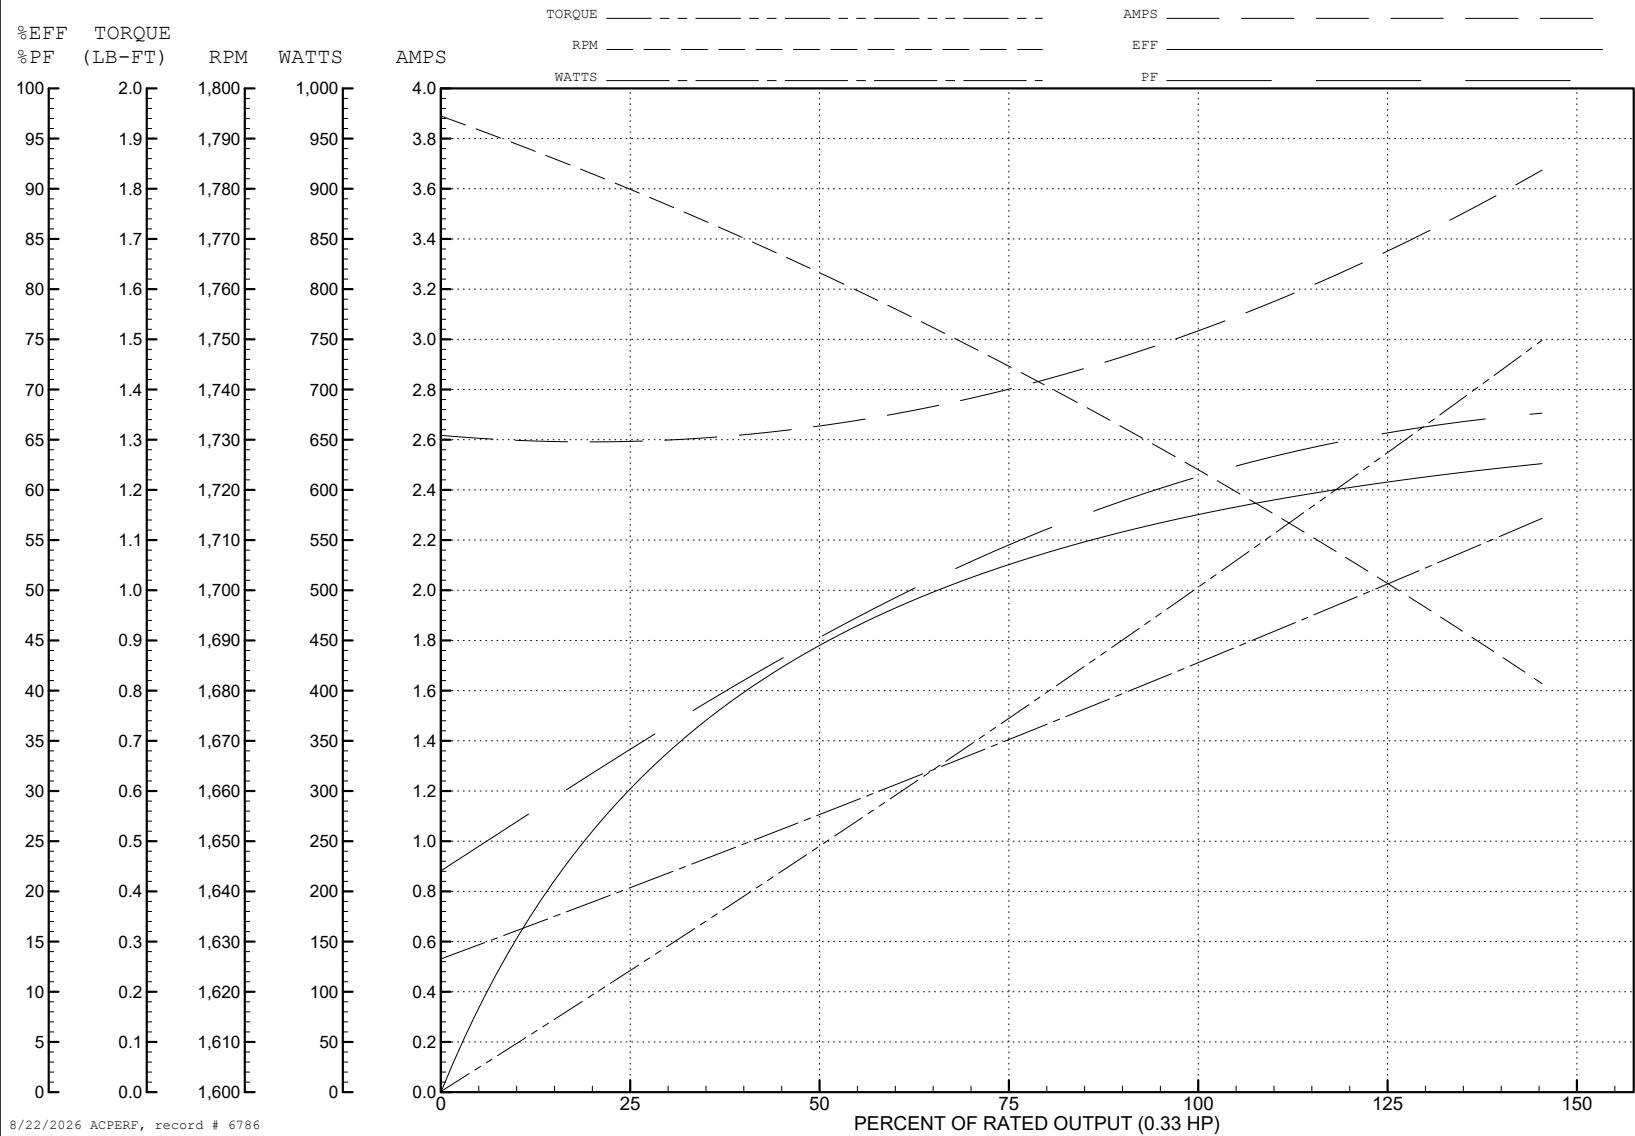

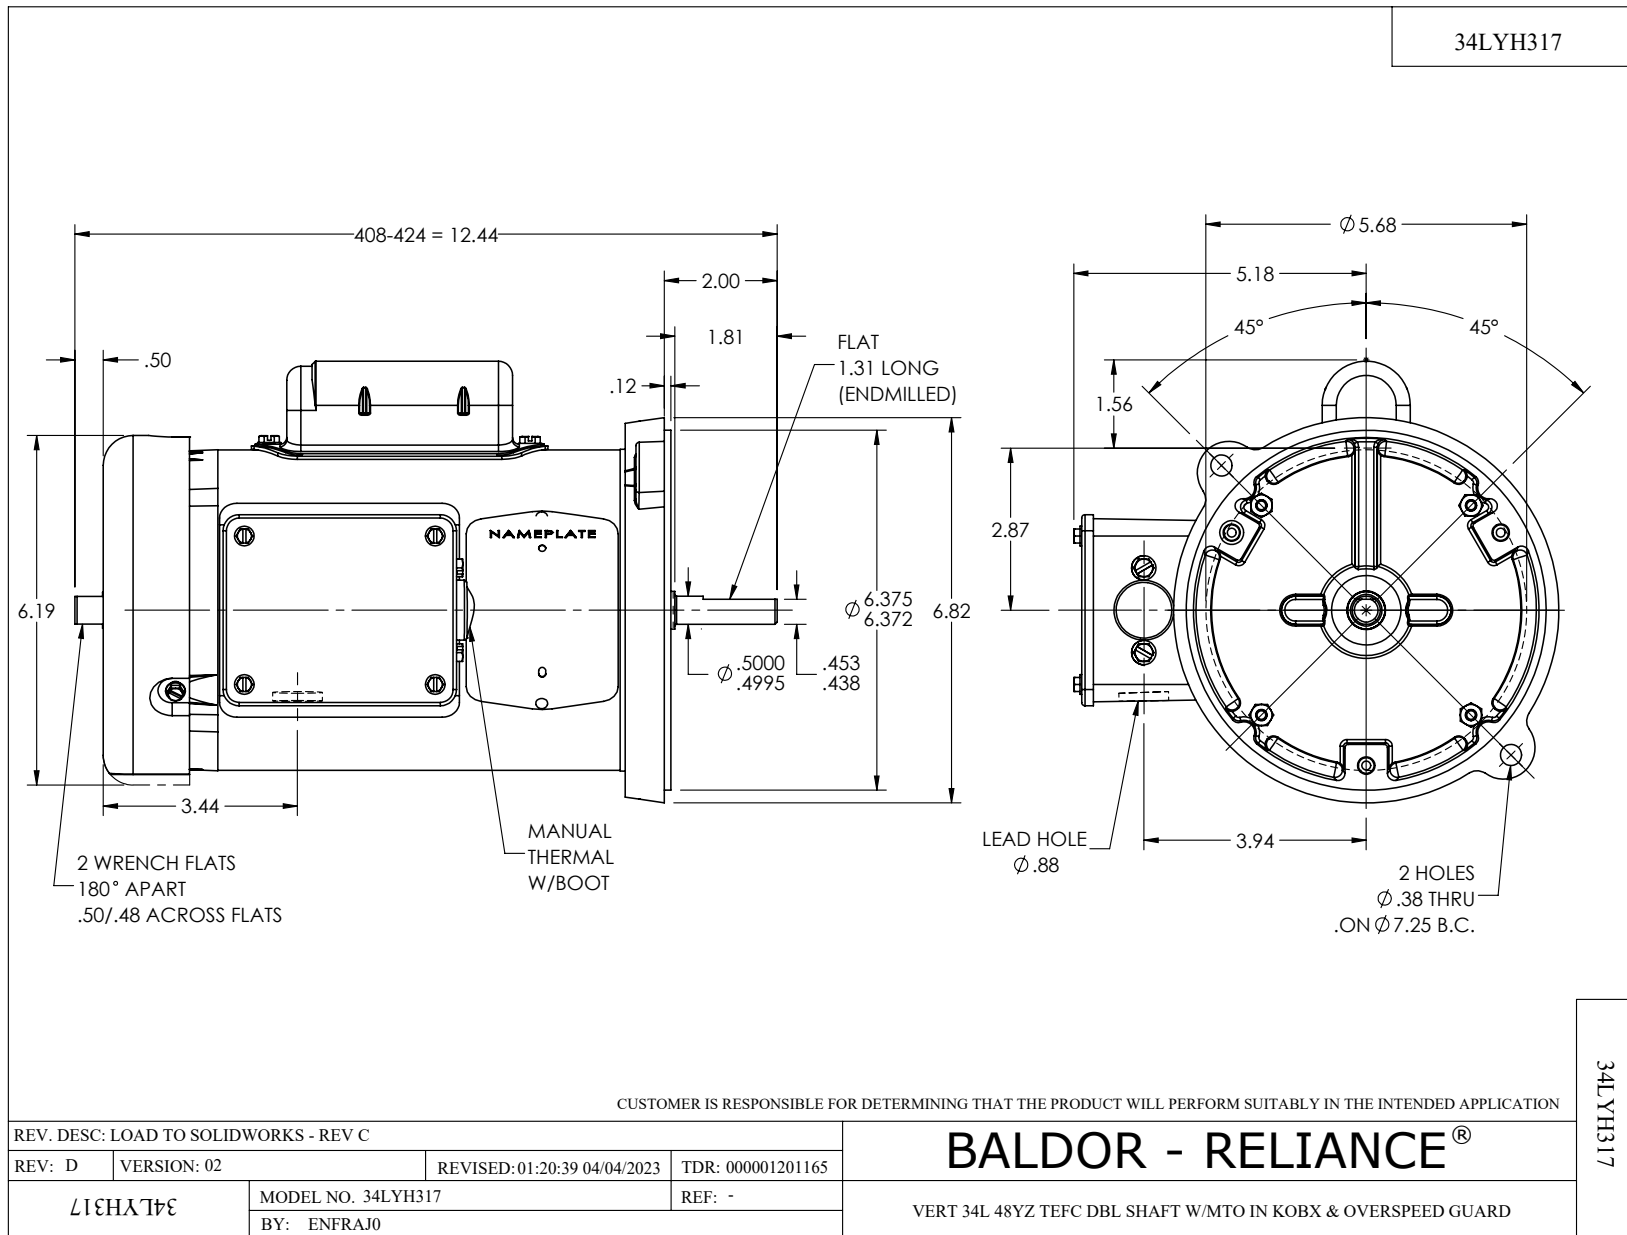

CD0008

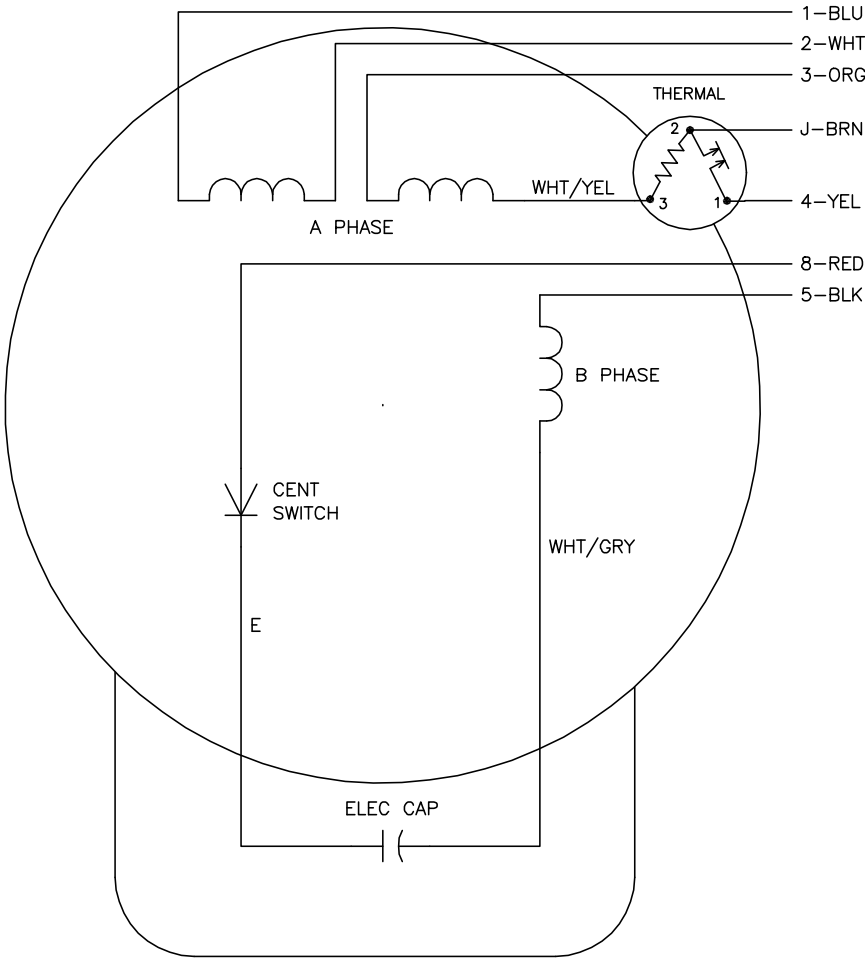

	LINE A	LINE B	JOIN	JOIN
HIGH STD	1	4	2,3,8	J,5
HIGH OPP	1	4	2,3,5	J,8
LOW STD	1,3,8	4	—	2,J,5
LOW OPP	1,3,5	4	—	2,J,8

- NOTES:
1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
 2. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
 3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REMOVE 2-TERMINAL THERMAL DETAIL, SEE CD0008A02		
REV. LTR: F	VERSION: 01	TDR: 000000360649
800000	FILE: \AAA\00007\408	REVISED: 10:56:54 04/18/2005
	MTL: —	BY: ENJOEPO

BALDOR ELECTRIC Co.

TYPE L, DV, REV, THERMAL, 7 LEADS

CD0008