

ABB BALDOR RELIANCE III

Customer information packet

CDRX18264T

2HP, 1165//970RPM, 3PH, 60HZ, 184TC, XPFC, F1

Class - CLI GP C,D

Division - Division I

Specifications

Enclosure	XPFC
Frame	184TC
Frame Material	Iron
Frequency	50.00 Hz 60.00 Hz
Haz Area Class and Group	CLI GP C,D
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	2.000 HP @ 60 HZ 1.500 HP @ 50 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 190.0 V @ 50 HZ 230.0 V @ 60 HZ 380.0 V @ 50 HZ
Agency Approvals	UL CSA EEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	3.000 A @ 380.0 V 3.150 A @ 460.0 V 6.000 A @ 190.0 V 6.300 A @ 230.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT

Part Detail

Revision	C
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	06WGW970
Layout	06LYH515
Eff. date	03-05-2025
CD Diagram	CD0005
Poles	06
Leads	9#16
Proprietary	False
Created date	05-29-2019

Efficiency @ 100% Load	88.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	3.0 a
Insulation Class	F
Inverter Code	Inverter Duty
IP Rating	NONE
KVA Code	K
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	1800 rpm
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0642M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	18.31 IN
Power Factor	68
Product Family	General Purpose
Pulley Face Code	C-Face
Rodent Screen	None
RoHS Status	ROHS NON-COMPLIANT
Service Factor	1.00
Shaft Diameter	1.125 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1165 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor

Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1401XPSLEV												
NO.							CC	010A				
S/N							TEMP CODE		T3C			
SPEC.	06-0000-0134						INV.TYPE		PWM			
CAT.NO.	CDRX18264T						C HP FR	60	C HP TO	90		
HP	2//1.5						CT HZ FROM		6	CT HZ TO		60
VOLTS	230/460//190/380						VT HZ FROM		6	VT HZ TO		60
AMPS	6.3/3.15//6/3						MAG CUR		3.6/1.8			
RPM	1165//970						MX RPM		1800			
HZ	60//50	PH	3	CL	F	NOM.EFF.		88.5				
SER.F.	1.00	DES	B	SL HZ	1.8	WK2		0.395				
FRAME	184TC	RATING		40C AMB-CONT								
	1.15 SF SINEWAVE											
	55C AMB @ 1.0SF						NEMA MG-1 PT 5,IP55					

Parts List

Part number	Description	Quantity
SA370102	SA 06-0000-0134	1.000 ea
RA359736	RA 06-0000-0134	1.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
LC0145B01	CONNECTION LABEL	1.000 ea
NP1401XPSLEV	SS XP INV UL CSA-EEV CC CL-I GP-C&D	1.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	4.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
LB1081F	ALUM XP CAUTION LABEL (FS PLANT ONLY-	1.000 ea
HW3201A05	3/8-16 EYEBOLT	1.000 ea
06FH1003A06G	FAN COVER, X-PROOF--MACHINING W/GRAY EPO	1.000 ea
51XN1032A14	10-32 X 0.875 HX WS SL SR	4.000 ea
36FN3000C01SP	EXFN, PLASTIC, 5.25 OD, .912 ID	1.000 ea
51XB1214A16	12-14X1.00 HXWSSLD SERTYB	1.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
06EP1709A07G	FRONT XPFC 205 BRG GRP C W/ DRAIN (HW450	1.000 ea
10XN3118K20	5/16-18 X 1 1/4 GRADE 5 STEEL ZC PLATED	4.000 ea
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	4.000 ea
HW5100A05	WVY WSHR F/205 & 304 BRGS	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
HW4500A19	1/4-28X1/4 SLOTTED PLUG F/S	1.000 ea
HW4506A02	BREATHER/DRAIN-EXP PROOF-.125-27 NPTF AI	1.000 ea
HW3022E05	.125 DIA X .500 ROLLED SPRING PIN	1.000 ea
06EP1707A17G	PUEP 182-4TC M GRP-C DRAIN(HW4506A02), G	1.000 ea
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	4.000 ea
10XN3118K20	5/16-18 X 1 1/4 GRADE 5 STEEL ZC PLATED	4.000 ea
HA2071A01	SLINGER ALUM (AUTO)	1.000 ea
80XN1032J06	10-32 X 3/8 SET SCREW, HEX SOC, CUP PT	2.000 ea
51XN1032A20	10-32 X 1 1/4 HX WS SL SR	2.000 ea
HW4001A01	1/4 HX SOC PIPE PLG (F/S) ALLOY STEEL W/	2.000 ea
63XN1032A07	10-32 X 7/16 TRUSS HEAD,TORX SERRATED ZN	2.000 ea

HW4506A02	BREATHER/DRAIN-EXP PROOF-.125-27 NPTF AI	1.000 ea
HW3022E05	.125 DIA X .500 ROLLED SPRING PIN	1.000 ea
07CB1000A02G	CONDUIT BOX, MODEL 306,EXP. PROOF,W/MG10	1.000 ea
84XN2520J16	1/4-20 X 1 SOC HD CAP SCREW	4.000 ea
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	4.000 ea
WD1000B17	T&B CX35TN OR L35P TERMINAL LUG	1.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
07CB1502A01G	CONDUIT BOX LID MACH (DUCTILE IRON) GRAY	1.000 ea
84XN2520J16	1/4-20 X 1 SOC HD CAP SCREW	4.000 ea
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	4.000 ea
MG1500Y02	WILKOPON PRIMER YELLOW	0.022 ga
MG1025G29	WILKOFAS, 789.229, DARK CHARCOAL GRAY	0.022 ga
37PA1074	PALLET PACK GRP, PRINT BOX PK1026A06	1.000 ea
HW2501E17	.250 SQUARE X 1.875 LONG LOW CARBON STEE	1.000 ea
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 ea

AC Induction Motor Performance Data

Record # 75925

Typical performance - not guaranteed values

Winding: 06WGW970-R007			Type: 0642M		Enclosure: XPFC		
Nameplate Data			460 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		2//1.5	Full Load Torque		9.06 LB-FT		
Volts		230/460//190/380	Start Configuration		direct on line		
Full Load Amps		6.3/3.15//6/3	Breakdown Torque		31.02 LB-FT		
R.P.M.		1165//970	Pull-up Torque		16.7 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		19.9 LB-FT	
NEMA Design Code		B	KVA Code	K	Starting Current		20.9 A
Service Factor (S.F.)		1	No-load Current		1.84 A		
NEMA Nom. Eff.		88.5	Power Factor	68	Line-line Res. @ 25°C		5.12 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		28°C	
S.F. Amps				Temp. Rise @ S.F. Load		33°C	
				Locked-rotor Power Factor		28.5	
				Rotor inertia		0.395 LB-FT2	

Load Characteristics 460 V, 60 Hz, 2 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	32	49	61	68	73	75
Efficiency	75.2	83.8	86.2	87.2	86.2	85.3
Speed	1193	1186	1178	1170	1160	1149
Line amperes	1.98	2.28	2.7	3.18	3.72	4.37


ABB Motors and Mechanical Inc.

WINDING # 06WGW970

Typical performance - not guaranteed values.

2 HP 3 PH 60 HZ 1170 RPM 460 V 0642M

TORQUES (LB-FT): PO=31.02 PU=16.7 LR=19.9 LRA=20.9

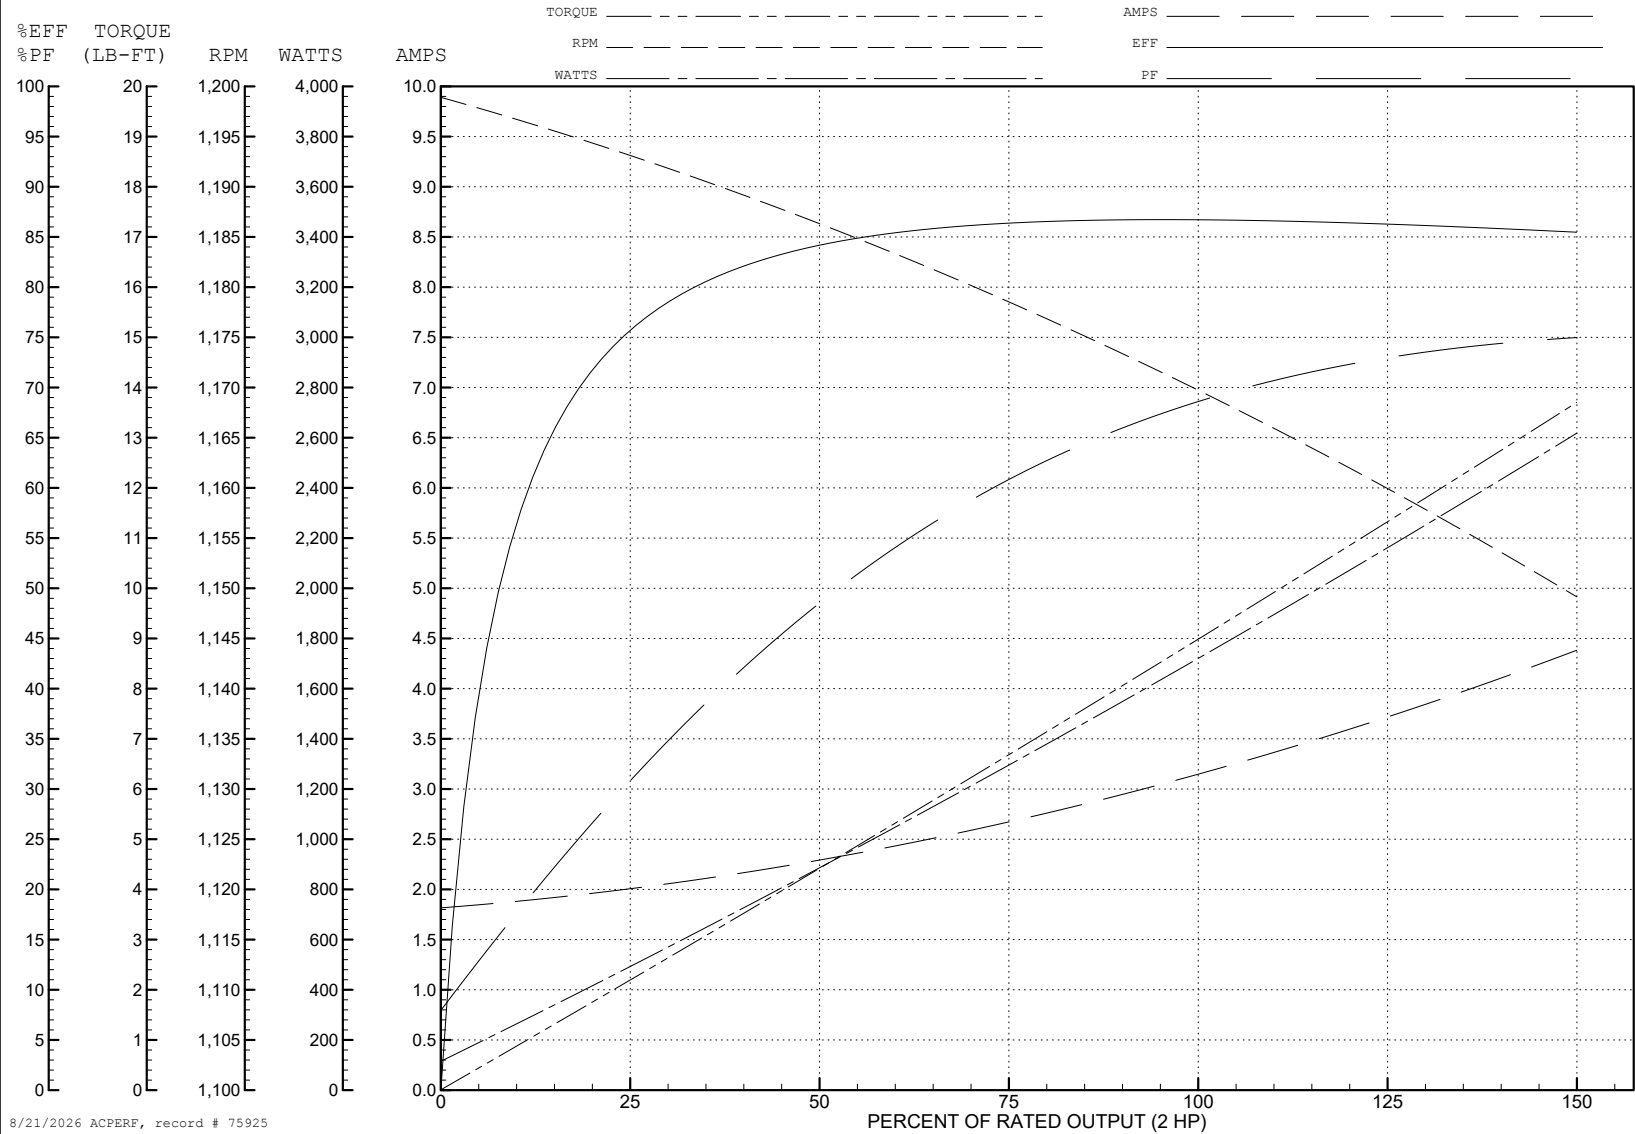

AC Induction Motor Performance Data

Record # 75926

Typical performance - not guaranteed values

Winding: 06WGW970-R007			Type: 0642M	Enclosure: XPFC		
Nameplate Data			380 V, 50 Hz: High Voltage Connection			
Rated Output (HP)	2//1.5		Full Load Torque	8.17 LB-FT		
Volts	230/460//190/380		Start Configuration	direct on line		
Full Load Amps	6.3/3.15//6/3		Breakdown Torque	30 LB-FT		
R.P.M.	1165//970		Pull-up Torque	17.62 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque	21 LB-FT	
NEMA Design Code	B		KVA Code	K	Starting Current	20.39 A
Service Factor (S.F.)	1		No-load Current	1.82 A		
NEMA Nom. Eff.	88.5	Power Factor	68	Line-line Res. @ 25°C	5.12 Ω	
Rating - Duty	40C AMB-CONT		Temp. Rise @ Rated Load	24°C		
			Locked-rotor Power Factor	32.2		
			Rotor inertia	0.395 LB-FT2		

Load Characteristics 380 V, 50 Hz, 1.5 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	29	46	58	66	72	75
Efficiency	78	85.4	87.3	87.9	86.4	85.4
Speed	994	987	980	973	964	955
Line amperes	1.93	2.18	2.53	2.94	3.41	3.98


ABB Motors and Mechanical Inc.


WINDING # 06WGW970

Typical performance - not guaranteed values.


1.5 HP 3 PH 50 HZ 973 RPM 380 V 0642M

TORQUES (LB-FT): PO=30 PU=17.62 LR=21 LRA=20.39

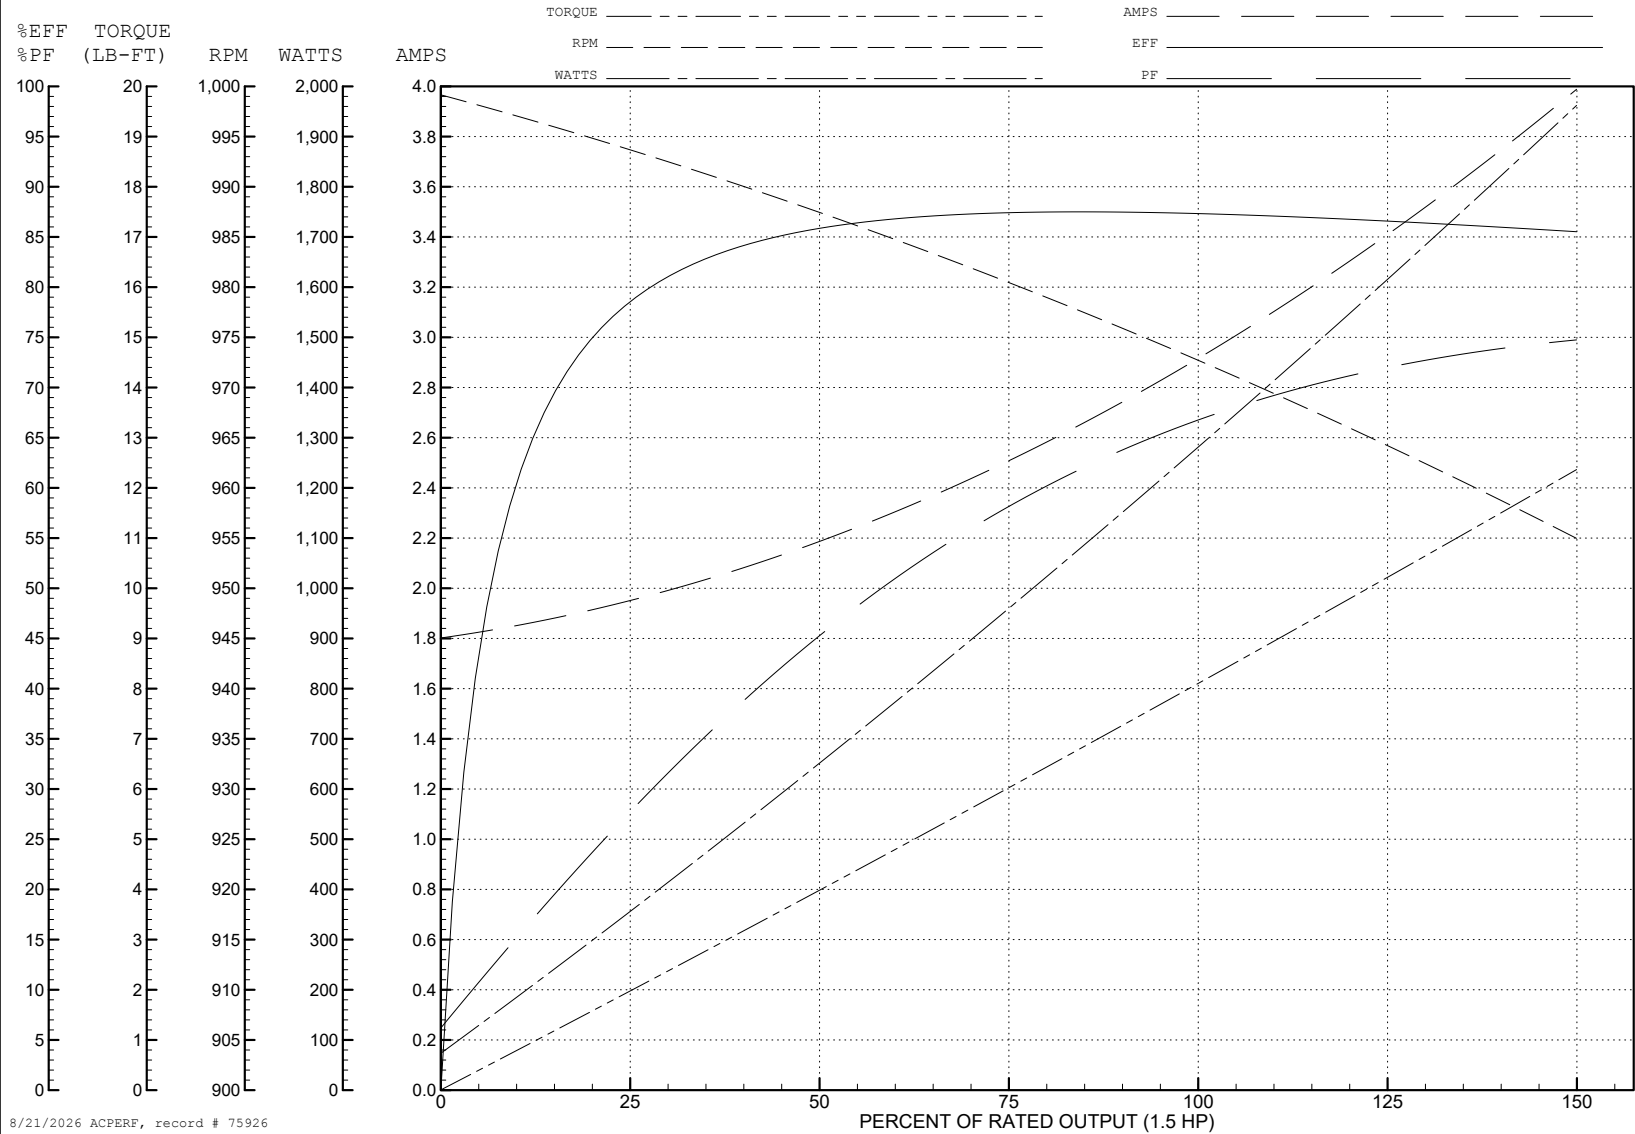




CD0005

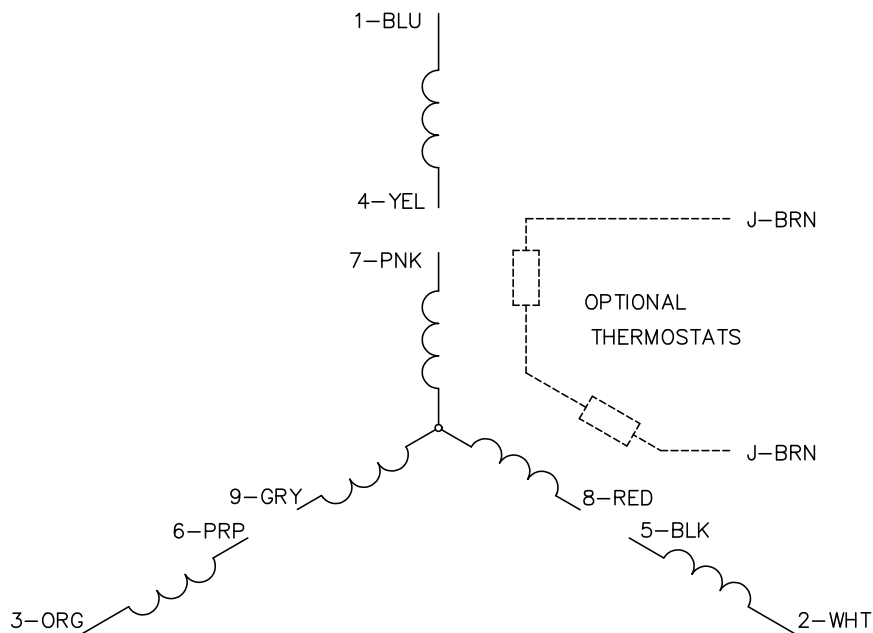


LOW VOLTAGE
(2Y)



LINE

HIGH VOLTAGE
(1Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: E

BY: JLP

REVISED: 01/19/99 10:15

TDR: 0171435

900000

FILE: AAA00005140

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005