

ABB BALDOR RELIANCE III

Customer information packet

CECP83582-4

1HP, 1155RPM, 3PH, 60HZ, 56C, 0526M, TEFC, F3, N

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	56C
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	1.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CCSA US CSA EEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	2
Current @ Voltage	1.700 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	82.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None

Part Detail

Revision	E
Type	AC
Mech. spec.	05G312
Base	
Status	PRD/A
Elec. spec.	05WGX572
Layout	05LYG312
Eff. date	08-06-2026
CD Diagram	CD0006
Poles	06
Leads	3#18
Proprietary	False
Created date	09-09-2022

Haz Area Temp Code	T4
Heater Indicator	No Heater
High Voltage Full Load Amps	1.7 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	J
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	1800 rpm
Motor Lead Quantity/Wire Size	3 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0526M
Mounting Arrangement	F3
Number of Poles	6
Overall Length	14.81 IN
Power Factor	67
Product Family	Chem Process S/P 32-8 IEEE 841
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1155 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2

None

Nameplate

NP4328									
CAT.NO.	CECP83582-4								
SPEC.	05G312X572G1								
HP	1 TE				IP	56			
VOLTS	460								
AMPS	1.7								
R.P.M.	1155								
FRAME	56C		HZ		60		PH	3	
SER.F.	1.15	CODE	J	DES.	B	CLASS		F	
RATING	40C AMB-CONT								
SN									
DE	6205		ODE		6205				
NEMA NOM. EFF.	82.5		P.F.		67				
GUAR. MIN. EFF.	80		CC		010A				
T. CODE	T4		TEMP=		135				

NP3186									
SPEC.	05G312X572G1								
ABMA DE BRG	25BC02X30X								
ABMA ODE BRG	25BC02X30X								
GREASE	POLYREX EM								
MOTOR WEIGHT		ROTOR BARS		27	STATOR BARS		36		
MAX. R.P.M.	1800	MAX. KVAR							
	SFA 1.86								
INV.TYPE	PWM								
T=	135								
CHP	60	TO	90						
CT	2	TO	60						
VT	-0	TO	60						
HTR-VOLTS	N/A	HTR-AMPS		N/A					
HTR-WATTS	N/A	MAX. SPACE HEATER TEMP.							N/A

Parts List

Part number	Description	Quantity
SA407349	SA 05G312X572G1	1.000 ea
RA398848	RA 05G312X572G1	1.000 ea
35FN3002A05SP	EXFN, PLASTIC, 6.376 OD, .638 ID	1.000 ea
85XU1208S08	#12 X 1/2 ROUND DRIVE PIN STAINLESS	1.000 ea
07CB1000A02G	CONDUIT BOX, MODEL 306,EXP. PROOF,W/MG10	1.000 ea
RM1016	LEAD SEPARATOR GASKET - 305/306 C.P.MOTO	1.000 ea
51XF2520A16	SCREW,HEX SER SLT HD,ZN 1/4-20X1.00LG TD	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
HW3001B01	BRASS CUP WASHER, FOR #10 SCREW	1.000 ea
10XN2520G06	1/4 20X3/8 HX HD CAP, GREEN	1.000 ea
WD1000B16	T&B CX70TN OR L70P TERMINAL LUG	1.000 ea
51XN1032A20	10-32 X 1 1/4 HX WS SL SR	2.000 ea
05EP1100A46G	FREP TEFC 205,GRSR,RLF,DRAIN FITTING,INP	1.000 ea
HW4601B22	INPRO SEAL, 205 BRG, MINI66	1.000 ea
HW4500A32	FIT./EXT 1698-B (ALEMITE)GREASE FITTING	1.000 ea
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 ea
HW4500A17	317400 ALEMITE GREASE RELIEF	1.000 ea
HA4010A01	T-DRAIN PLUG,416 S.S.,W/ 1/4-28 THD & .0	1.000 ea
HA4010	DRAIN PLUG,416 S.S.,W/ 1/4-28 THD	3.000 ea
HA4010	DRAIN PLUG,416 S.S.,W/ 1/4-28 THD	3.000 ea
HW5100A05	WVY WSHR F/205 & 304 BRGS	1.000 ea
35EP1329B03G	EP ENCL 205 BRG,GRSR,RLF,DRAINS,INPRO	1.000 ea
HW4601B22	INPRO SEAL, 205 BRG, MINI66	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 ea
HW4500A17	317400 ALEMITE GREASE RELIEF	1.000 ea
HA4010A01	T-DRAIN PLUG,416 S.S.,W/ 1/4-28 THD & .0	1.000 ea
51XN1032A20	10-32 X 1 1/4 HX WS SL SR	2.000 ea
HA3100A68	10-32X9.688 THRUBOLT	4.000 ea
35FH1000A19G	35FH1000A19 W/GRAY FLUIDIZ	1.000 ea
10XN2520A16	1/4-20 X 1 HEX HEAD CAP SCR, ZINC PLATED	3.000 ea

HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	4.000 ea
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	3.000 ea
51XB1214A16	12-14X1.00 HXWSSLD SERTYB	1.000 ea
07CB1502A06G	CONDUIT BOX LID MACH, MACH GRAY	1.000 ea
07GS1007	GASKET, CONDUIT BOX, .125 THICK BLACK NE	1.000 ea
10XN2520A16	1/4-20 X 1 HEX HEAD CAP SCR, ZINC PLATED	4.000 ea
HW2501D13	KEY, 3/16 SQ X 1.375	1.000 ea
HA7000A01	KEY RETAINER 7/8" DIA SHAFT	1.000 ea
MJ5001A02	732 CL SEALANT 3 OZ DIXIE BEARING 289100	0.010 ea
MJ5001A27	32220KN GRAY SEALER *MIN BUY 4 QTS=1GAL	0.001 qt
MJ1000A73	INPRO P-80 ASSEMBLY LUB./ 1 QT. CONTAIN	0.001 qt
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	4.000 ea
LT0019A00	MOTOR NO-LOAD PERFORMANCE DATA SHEET	1.000 ea
WD1000D21	TRM,T&B #B71M,RING,18-14,.25,NON-INSL	3.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
MG1025N19	WILKOFAS, 778.50, RELIANCE BLUE-GREEN 8	0.022 ga
MG1500Y02	WILKOPON PRIMER YELLOW	0.025 ga
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
LB1449	DIV-2/NEC WARNING LABEL	1.000 ea
LC0006	CONNECTION LABEL	1.000 ea
NP4328	SS IEEE841-2021 DIV-2 UL EEV CSA-C US	1.000 ea
NP3186	SS IEEE841 INV AUX DATA INFORMATION	1.000 ea
36PA1001	PKG GRP, PRINT PK1017A07	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea

AC Induction Motor Performance Data

Record # 82314

Typical performance - not guaranteed values

Winding: 05WGX572-R001			Type: 0526M	Enclosure: TEFC	
Nameplate Data			460 V, 60 Hz: Single Voltage Motor		
Rated Output (HP)		1	Full Load Torque	4.48 LB-FT	
Volts		460	Start Configuration	direct on line	
Full Load Amps		1.7	Breakdown Torque	11.9 LB-FT	
R.P.M.		1155	Pull-up Torque	7.06 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque	8.62 LB-FT
NEMA Design Code	B	KVA Code	J	Starting Current	9.06 A
Service Factor (S.F.)		1.15	No-load Current	1.02 A	
NEMA Nom. Eff.	82.5	Power Factor	67	Line-line Res. @ 25°C	21.1 Ω
Rating - Duty		40C	AMB-CONT	Temp. Rise @ Rated Load	46°C
S.F. Amps				Temp. Rise @ S.F. Load	56°C
				Locked-rotor Power Factor	48.3
				Rotor inertia	0.189 lb-ft²

Load Characteristics 460 V, 60 Hz, 1 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	29	47	59	67	72	75	70
Efficiency	73.6	81.7	83.5	83.2	81.6	79.1	82.2
Speed	1193	1185	1178	1169	1159	1147	1163
Line amperes	1.07	1.21	1.41	1.67	1.98	2.35	1.86


ABB Motors and Mechanical Inc.

WINDING # 05WGX572

Typical performance - not guaranteed values.

1 HP 3 PH 60 HZ 1155 RPM 460 V 0526M

TORQUES (LB-FT): PO=11.9 PU=7.06 LR=8.62 LRA=9.06

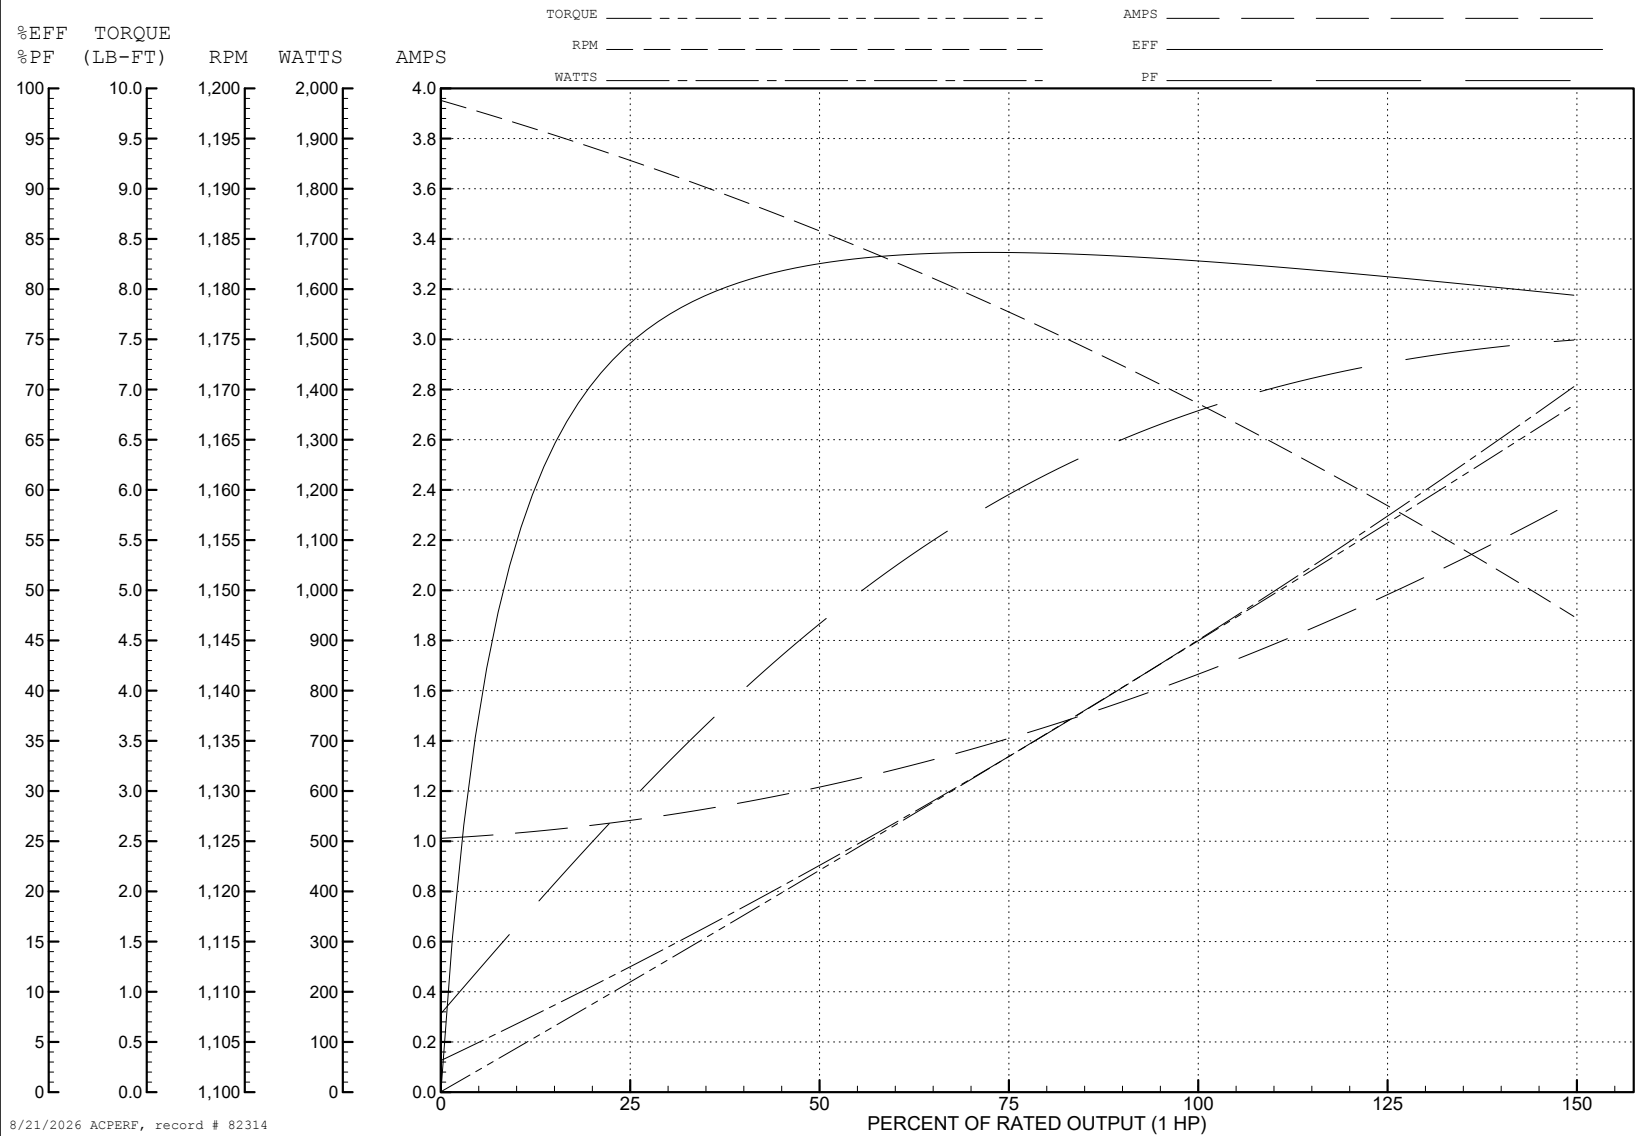

AC Induction Motor Performance Data

Record # 99230

Typical performance - not guaranteed values

Winding: 05WGX572-R001			Type: 0526M		Enclosure: TEFC	
Nameplate Data			368 V, 60 Hz: Single Voltage Motor			
Rated Output (HP)		1	Full Load Torque		4.56 LB-FT	
Volts		368	Start Configuration		direct on line	
Full Load Amps		1.7	Breakdown Torque		7.6 LB-FT	
R.P.M.		1155	Pull-up Torque		4.4 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque	5.4 LB-FT	
NEMA Design Code	B	KVA Code	J	Starting Current	7.2 A	
Service Factor (S.F.)		1.15	No-load Current		0.79 A	
NEMA Nom. Eff.	82.5	Power Factor	67	Line-line Res. @ 25°C	21.1 Ω	
Rating - Duty		40C AMB-CONT	Temp. Rise @ Rated Load		57°C	
S.F. Amps		1.86	Temp. Rise @ S.F. Load		78°C	
			Locked-rotor Power Factor		48.3	
			Rotor inertia		0.189 lb-ft²	

Load Characteristics 368 V, 60 Hz, 1 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	41	61	71	75	76	69	76
Efficiency	79.8	84	83.2	80.5	75.7	59.7	77.6
Speed	1189	1177	1165	1149	1125	1033	1135
Line amperes	0.88	1.13	1.48	1.93	2.52	4.09	2.28


ABB Motors and Mechanical Inc.


WINDING # 05WGX572

Typical performance - not guaranteed values.




1 HP 3 PH 60 HZ 1155 RPM 368 V 0526M

TORQUES (LB-FT): PO=7.6 PU=4.4 LR=5.4 LRA=7.2

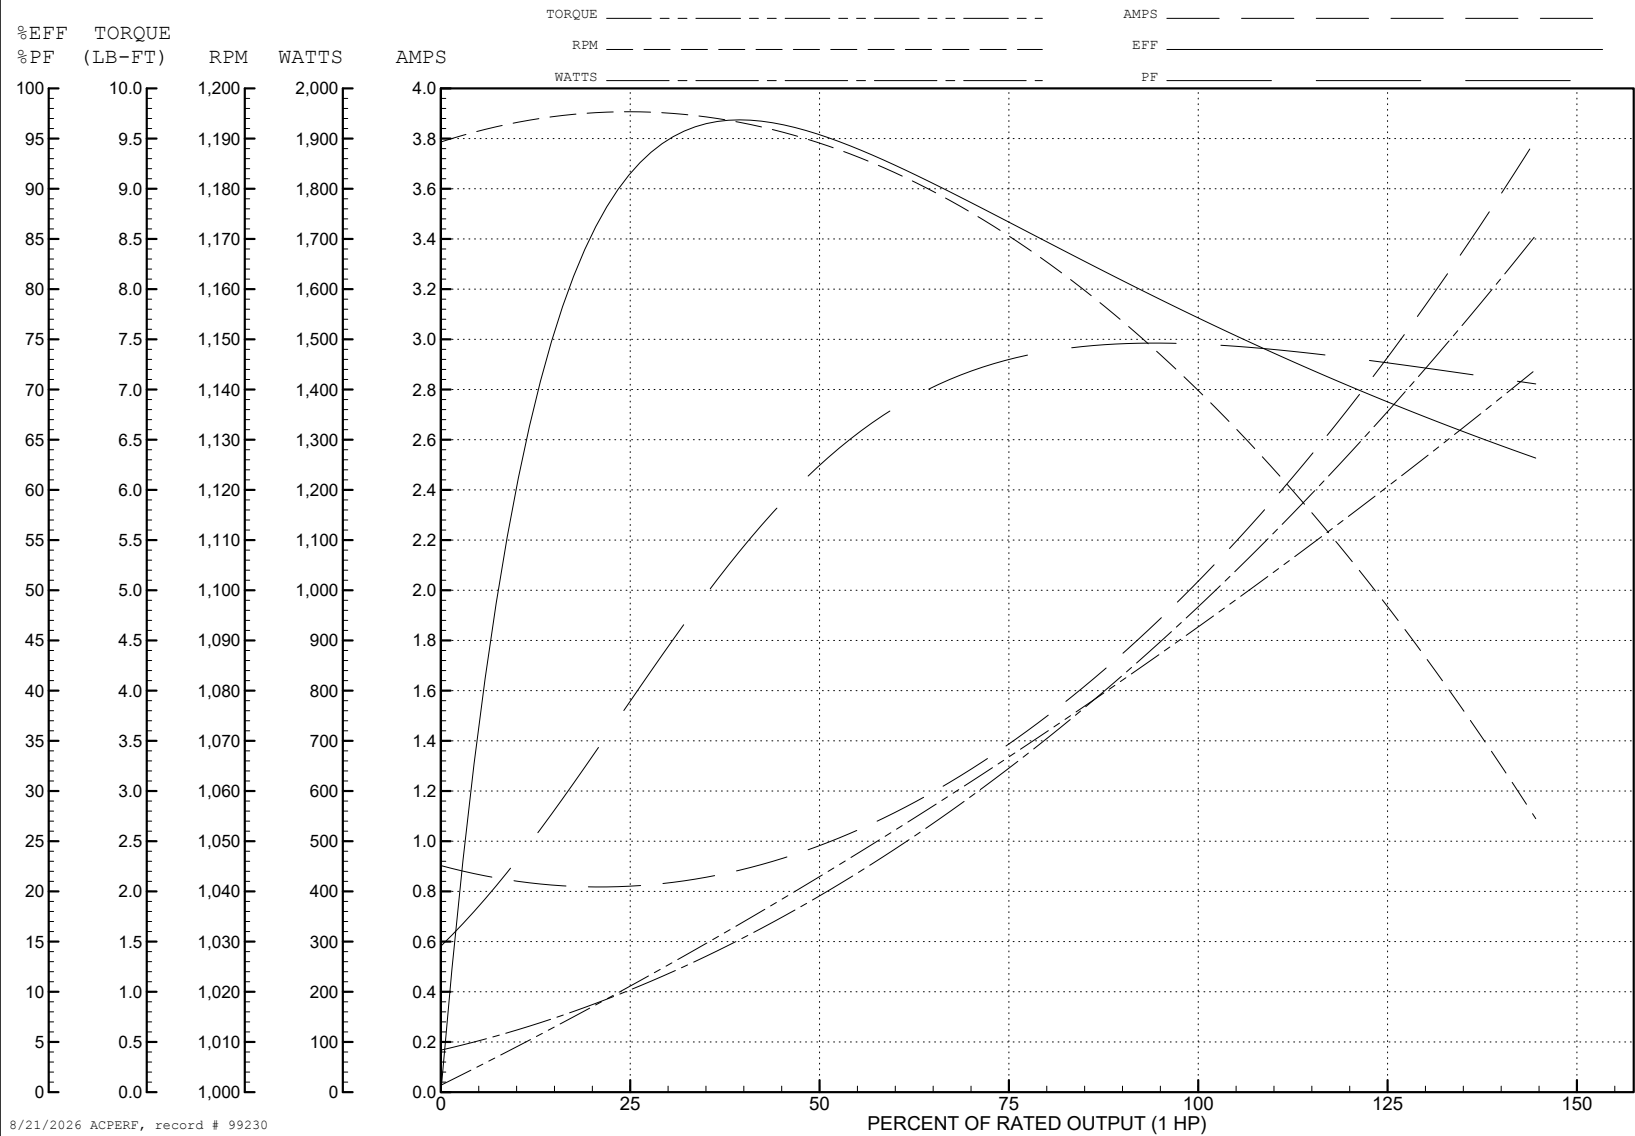

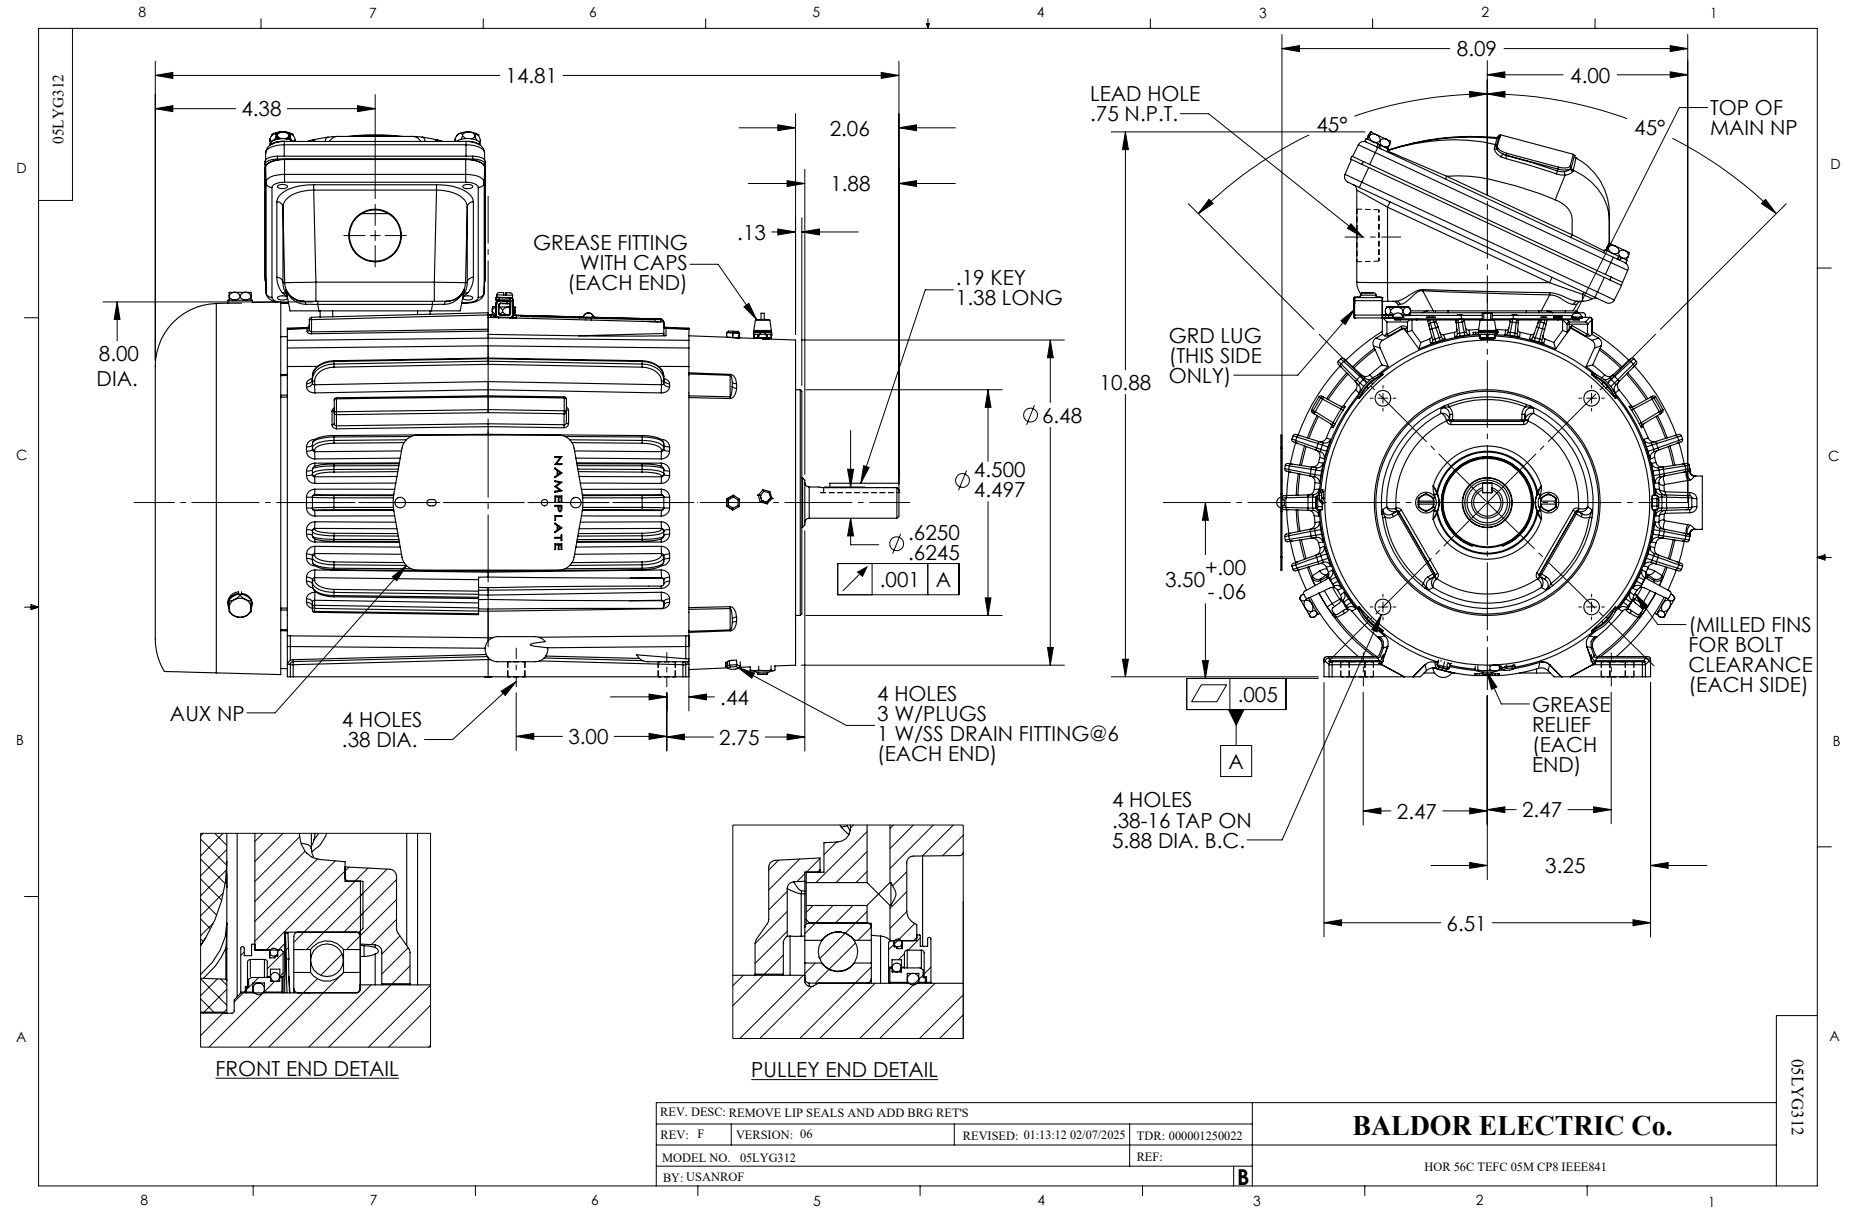

CD0006

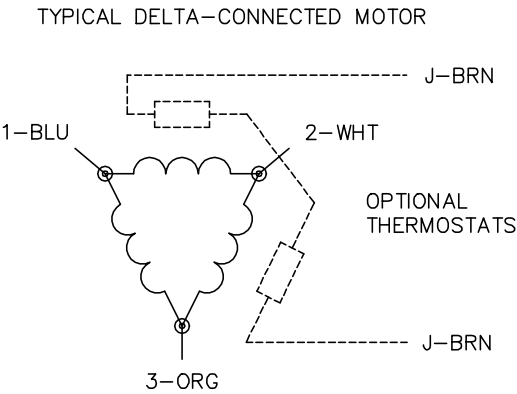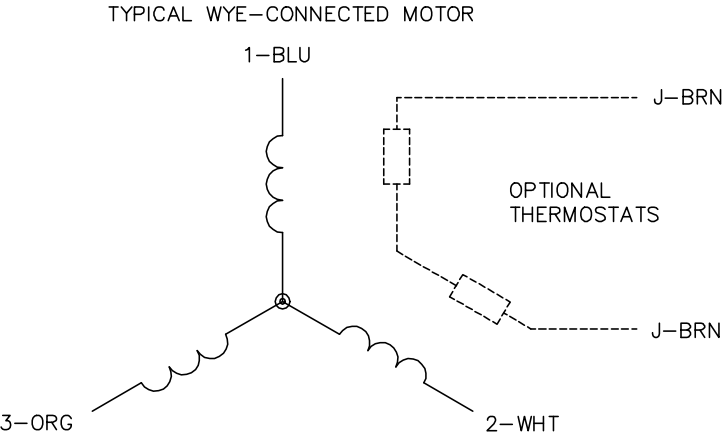

- NOTES:
1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
 2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
 5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10: 24: 49 02/19/2019	BY: ENBRIRO
MTL: —		

BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1