Customer information packet

CEWDBM3611T

3HP, 1764RPM, 3PH, 60HZ, 182TC, 3630M, TEFC, F1
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/3/2026 1:37:46 AM

Specifications

Enclosure	TEFC
Frame	182TC
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	3.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
	460.0 V @ 60 HZ
Agency Approvals	CURUSEEV
	NEMA PREMIUM
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	4.160 A @ 460.0 V
	8.320 A @ 230.0 V
	8.800 A @ 208.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	4.2 a

Part Detail

Revision	C
Type	AC
Mech. spec.	36G566
Base	
Status	PRD/A
Elec. spec.	36WGZ650
Layout	36LYG566
Eff. date	04-21-2026
CD Diagram	CD0005
Poles	04
Leads	9#16
Proprietary	False
Created date	11-05-2025

Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3630M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	21.77 IN
Power Factor	74
Product Family	Wash Down
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	Other
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1764 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1669L								
CAT.NO.	CEWDBM3611T							
SPEC.	36G566Z650							
HP	3							
VOLTS	230/460							
AMP	8.4/4.2							
RPM	1765							
FRAME	182TC	**HZ**	60			**PH**	3	
SER.F.	1.15	**CODE**	K	**DES**	B	**CLASS**	F	
NEMA-NOM-EFF	89.5	**PF**	74					
RATING	40C AMB-CONT							
CC	010A							
DE	6206	**ODE**	6205					
ENCL	TEFC	**SN**						
BLANK	SFA 9.28/4.64							

Parts List

Part number	Description	Quantity
SA442984	SA 36G566Z650	1.000 ea
RA435480	RA 36G566Z650	1.000 ea
36CB3005A03W	36 CB .75 NPT @ 6 W/WHITE EPOXY	1.000 ea
35GS1022A03	GASKET BOX .125 THK WHITE NEOPRENE	1.000 ea
51XB1016A08	10-16X 1/2HXWSSLD SERTYB	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
36EP1303A55MW	FACE 36M WASHDOWN DRILLED W/WHITE EPOXY	1.000 ea
HW4032A01	BLACK DRAIN PLUG FOR WASH DOWN MOTORS	3.000 ea
HW5100A05	WVY WSHR F/205 & 304 BRGS	1.000 ea
36PE3301A27MW	PUEP ASSEMBLY FOR ROUTING PURPOSES	1.000 ea
HW4032A01	BLACK DRAIN PLUG FOR WASH DOWN MOTORS	3.000 ea
HW4600B50	SEAL 1.156 X 1.874 X 0.250 SINGLE LIP DB	1.000 ea
10XN2520S26	1/4-20X 1 5/8 HEX HD SS	4.000 ea
HW2502D08	KEY, 3/16 X .875 SS	1.000 ea
51XB1214A16	12-14X1.00 HXWSSLD SERTYB	1.000 ea
35FH4005A32W	FAN COVER MODEL 35 VERT. MOTORS W/WHITE	1.000 ea
10XN1032S06	HEX HD CAP SCREW, SS	3.000 ea
HA1014A05	SPACER FOR FAN COVER MTD ON BRAKE (#304	3.000 ea
HW4600B32SP	V-RING SLINGER 1.000 X 1.540 X .24 VITON	1.000 ea
11XB1016S08	10-16 X 1/2 HEX WASHER SLOTTED TYPE B	3.000 ea
HW4600B36SP	V-RING SLINGER 1.188 X 1.380 X .24 VITON	1.000 ea
36CB4518	36 LIPPED CB LID PRIMED	1.000 ea
37GS3010SP	1/16"WHITE LID GASKET	1.000 ea
59XW0832S07	TAPTITE II,HEX WSHR UNSLTD SER,410 S.S.,	4.000 ea
HW2502E16	#303 SS,SQ KEY 1/4 X 1.750	1.000 ea
MJ5001A27	32220KN GRAY SEALER *MIN BUY 4 QTS=1GAL	0.001 qt
LB1164	LABEL,WARNING AND DRAIN	1.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
HA5027A01	HA4066A01 T-DRAIN X2 BAGGED	1.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
MG1025Z02	ACTIVATOR WILKOFAST 060.02HF	0.010 ga

MG1025W01	WILKOFAST, 781.01, SIGNAL WHITE #9003	0.022 ga
75BK4406DQF	1-056-144-06-DQF BRAKE	1.000 ea
35FN3002A05SP	EXFN, PLASTIC, 6.376 OD, .638 ID	1.000 ea
84XN3816J36	3/8-16X2-1/4 SOCK HD, BK OX	4.000 ea
HA3101S26	THRUBOLT 1/4-20 X 11.375 SS	4.000 ea
LC0005	CONN.DIA.,TY M,9-LD,DUAL VOLT,REVERSING	1.000 ea
LB1404	BRAKE CONNECTION LABEL	1.000 ea
NP1669L	SS WD SUPER-E UL PREM REV MTG	1.000 ea
G0PA1000	PKG GRP, PRINT PK1026A06	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea


AC Induction Motor Performance Data
Record # 115759
Typical performance - not guaranteed values


Winding: 36WGZ650-R001	**Type:** 3630M	**Enclosure:** TEFC

Nameplate Data				**460 V, 60 Hz: High Voltage Connection**	
Rated Output (HP)			3	**Full Load Torque**	8.942 LB-FT
Volts			230/460	**Start Configuration**	direct on line
Full Load Amps			8.4/4.2	**Breakdown Torque**	38.2 LB-FT
R.P.M.			1765	**Pull-up Torque**	19.1 LB-FT
Hz	60	**Phase**	3	**Locked-rotor Torque**	22.4 LB-FT
NEMA Design Code	B	**KVA Code**	K	**Starting Current**	32.2 A
Service Factor (S.F.)			1.15	**No-load Current**	2.38 A
NEMA Nom. Eff.	89.5	**Power Factor**	74	**Line-line Res. @ 25ºC**	3.8717 Ω
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	46°C
S.F. Amps			9.4/4.7	**Temp. Rise @ S.F. Load**	56°C
				Locked-rotor Power Factor	42.6
				Rotor inertia	0.279 lb-ft²


Load Characteristics 460 V, 60 Hz, 3 HP


% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	33	54	67	74	79	81	77
Efficiency	82.2	88.4	89.8	89.8	89	87.9	89.3
Speed	1790.7	1781.4	1771.4	1761.2	1749.9	1738.7	1754
Line amperes	2.54	2.94	3.51	4.2	4.99	5.87	4.67

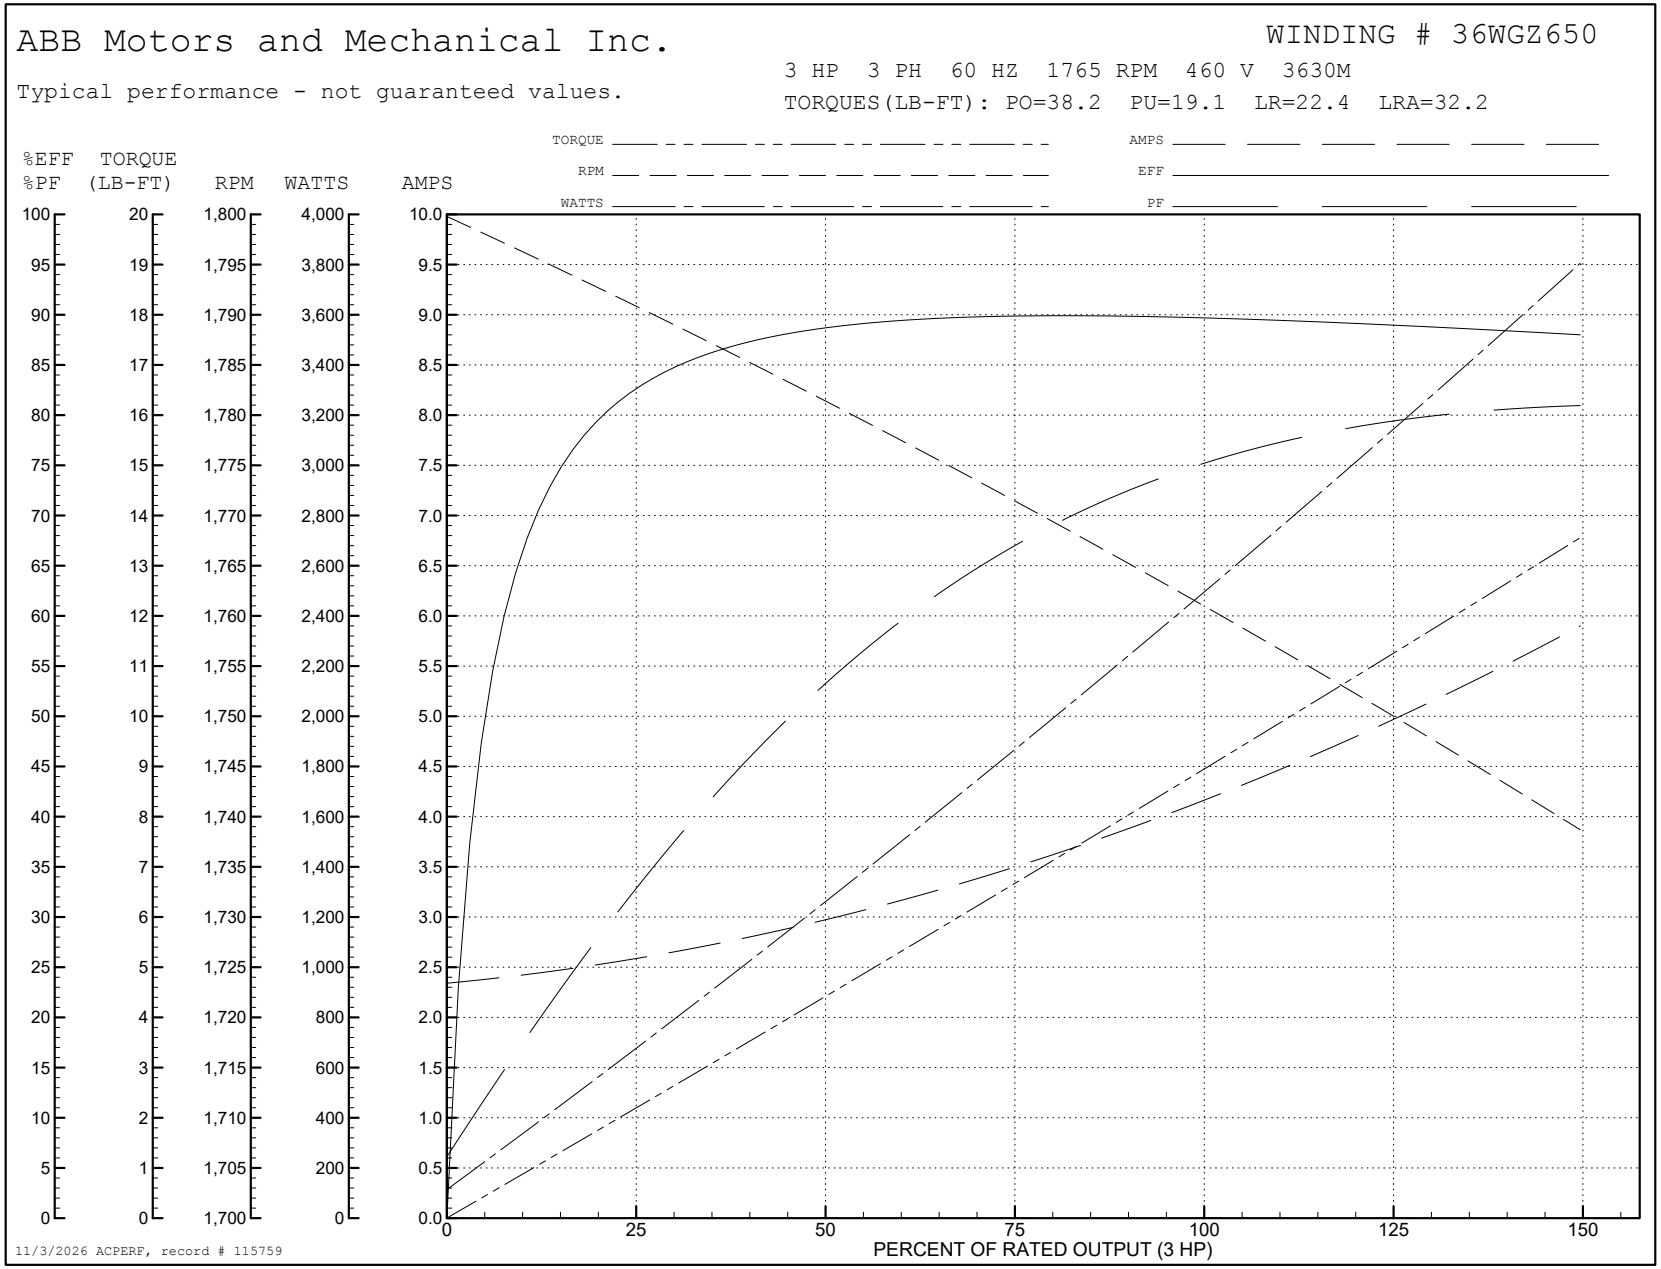
ABB Motors and Mechanical Inc.
WINDING # 36WGZ650
Typical performance - not guaranteed values.
3 HP 3 PH 60 HZ 1765 RPM 460 V 3630M
TORQUES(LB-FT): PO=38.2 PU=19.1 LR=22.4 LRA=32.2
TORQUE
RPM
WATTS
AMPS
EFF
PF
%EFF %PF
TORQUE (LB-FT)
RPM
WATTS
AMPS
PERCENT OF RATED OUTPUT (3 HP)
11/3/2026 ACPERF, record # 115759

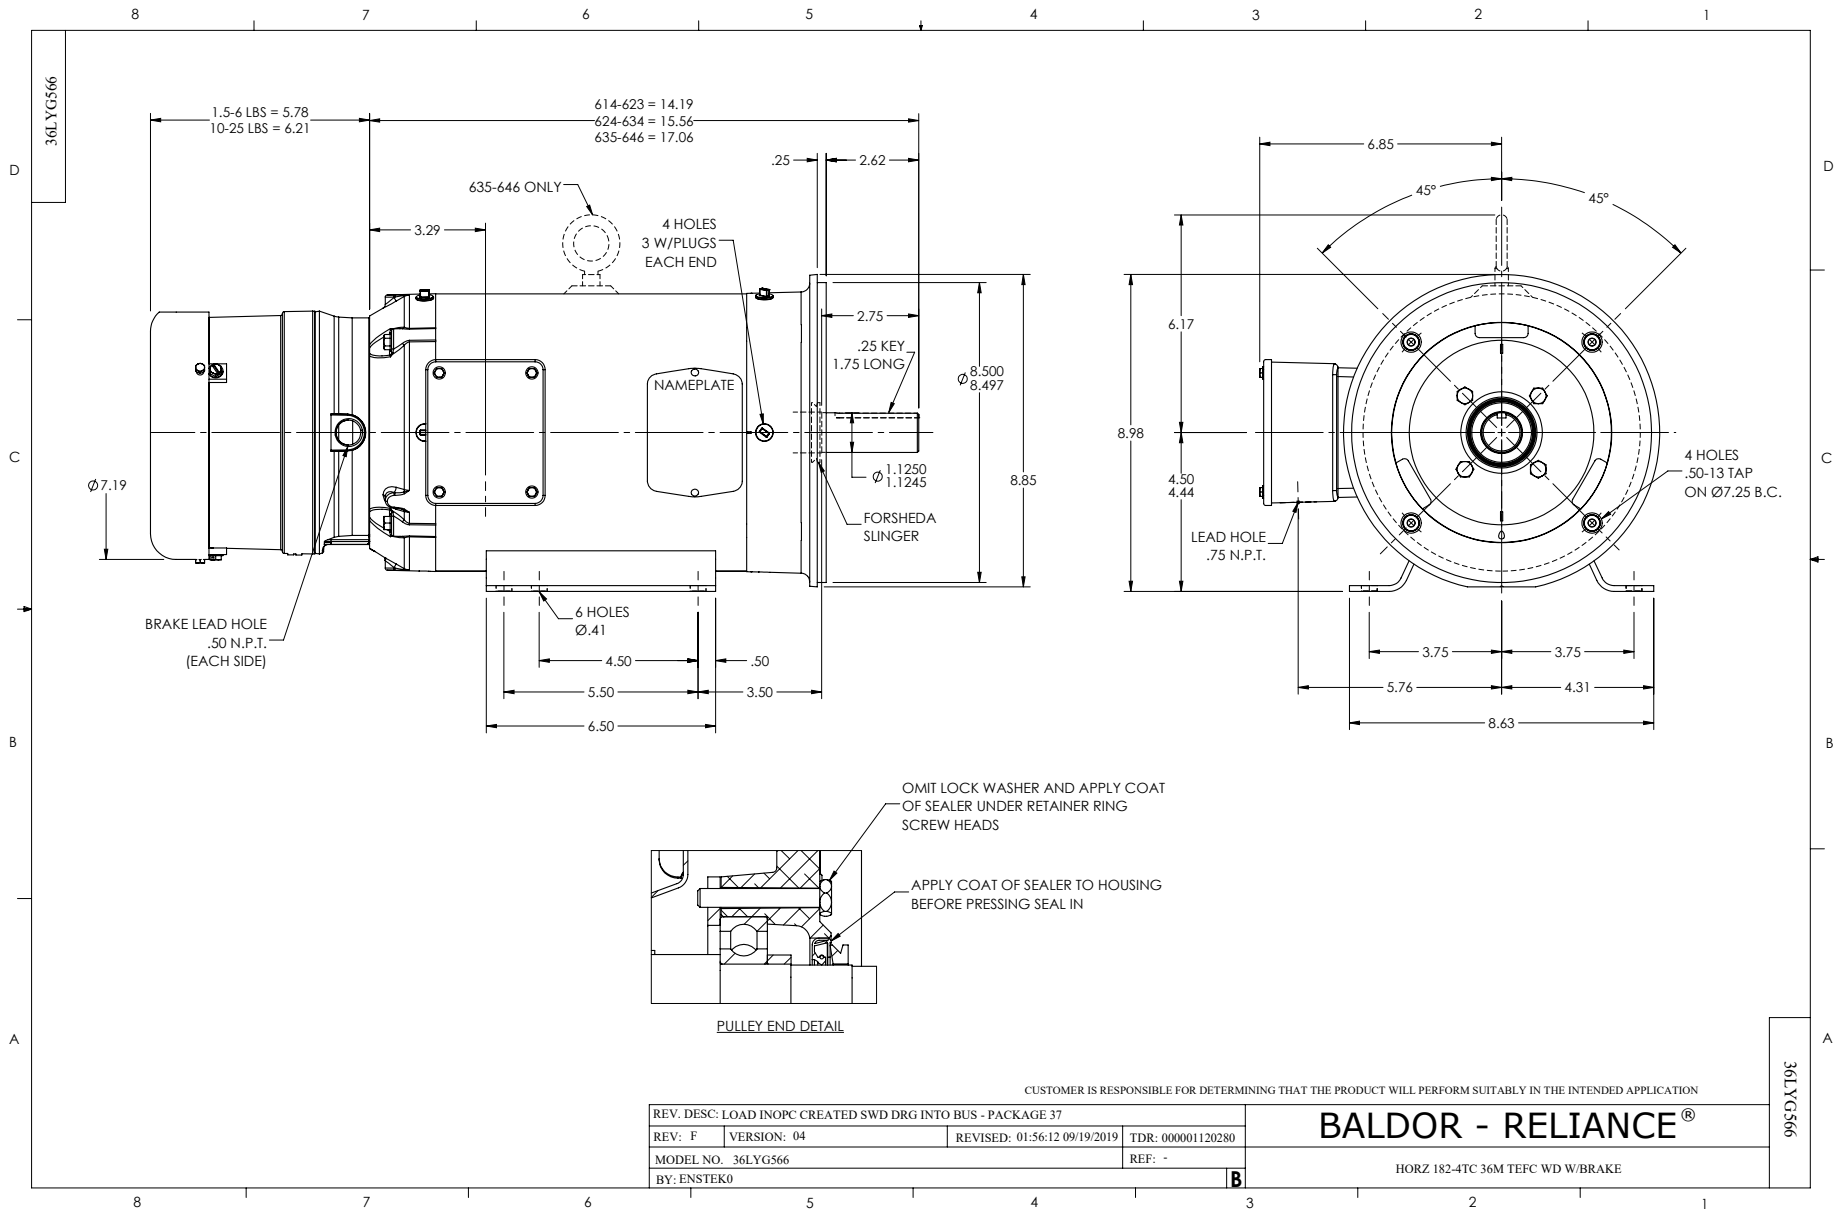
36LYG566
1.5-6 LBS = 5.78
10-25 LBS = 6.21
614-623 = 14.19
624-634 = 15.56
635-646 = 17.06
.25
2.62
635-646 ONLY
3.29
4 HOLES
3 W/PLUGS
EACH END
2.75
.25 KEY
1.75 LONG
NAMEPLATE
Ø8.500
8.497
Ø7.19
Ø1.1250
1.1245
8.85
FORSHEDA
SLINGER
BRAKE LEAD HOLE
.50 N.P.T.
(EACH SIDE)
6 HOLES
Ø.41
4.50
.50
5.50
3.50
6.50
6.85
45°
45°
6.17
8.98
4.50
4.44
4 HOLES
.50-13 TAP
ON Ø7.25 B.C.
LEAD HOLE
.75 N.P.T.
3.75
3.75
5.76
4.31
8.63
OMIT LOCK WASHER AND APPLY COAT
OF SEALER UNDER RETAINER RING
SCREW HEADS
APPLY COAT OF SEALER TO HOUSING
BEFORE PRESSING SEAL IN
PULLEY END DETAIL
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: LOAD INOPC CREATED SWD DRG INTO BUS - PACKAGE 37
REV: F
VERSION: 04
REVISED: 01:56:12 09/19/2019
TDR: 000001120280
MODEL NO. 36LYG566
REF: -
BY: ENSTEK0
B
BALDOR - RELIANCE®
HORZ 182-4TC 36M TEFC WD W/BRAKE
36LYG566

CD0005

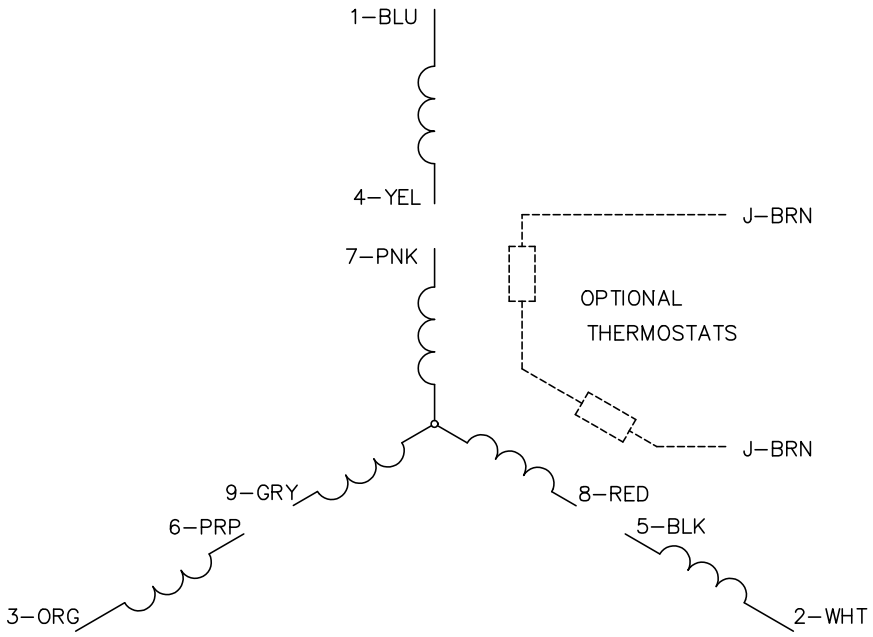

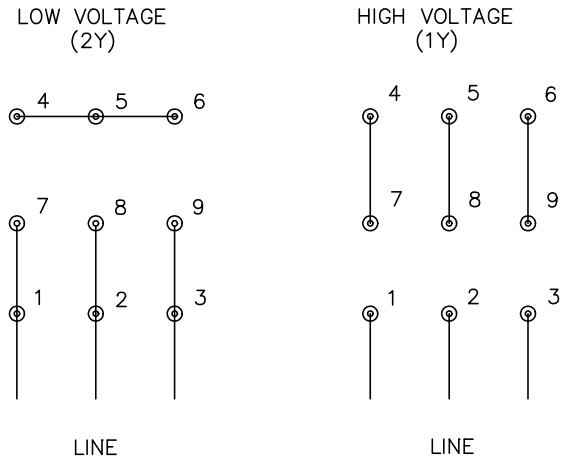

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
CD0005		FILE: AAA00005140	MDL: –
		MTL: –	3PH, DV, 9 LEADS