ABB BALDOR RELIANCE

Customer information packet

CEWDM3714T-5

10HP, 1770RPM, 3PH, 60HZ, 215TC, 3752M, TEFC, F
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/3/2026 3:20:13 AM

Specifications

Enclosure	TEFC
Frame	215TC
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	10.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	UR
	CSA
	CSA EEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	9.600 A @ 575.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.7 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	9.6 a
Insulation Class	F

Part Detail

Revision	S
Type	AC
Mech. spec.	37G815
Base	
Status	PRD/A
Elec. spec.	37WGS829
Layout	37LYG815
Eff. date	08-31-2026
CD Diagram	CD0006
Poles	04
Leads	3#14
Proprietary	False
Created date	04-29-2010

Inverter Code	Inverter Ready
KVA Code	K
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 14 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3752M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	21.27 IN
Power Factor	85
Product Family	Wash Down
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.375 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1770 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1669L								
CAT.NO.	CEWDM3714T-5							
SPEC.	37G815S829G1							
HP	10							
VOLTS	575							
AMP	9.6							
RPM	1770							
FRAME	215TC	**HZ**	60			**PH**	3	
SER.F.	1.15	**CODE**	K	**DES**	A	**CLASS**	F	
NEMA-NOM-EFF	91.7	**PF**	85					
RATING	40C AMB-CONT							
CC	010A							
DE	6307	**ODE**	6206					
ENCL	TEFC	**SN**						
BLANK	SFA 11.28							

Parts List

Part number	Description	Quantity
SA194242	SA 37G815S829G1	1.000 ea
RA181830	RA 37G815S829G1	1.000 ea
37FN3002C01	EXFN, PLASTIC, 6.00 OD, 1.155 ID	1.000 ea
HW3200A01	3/8-16X3/4 EYEBOLT WELDED F/S	1.000 ea
37CB3005A04W	CASTING W/.75 NPT@6(MACH WHITE)	1.000 ea
37GS1025	37 MOLDED GASKET W/LIP, LEAD SEAL	1.000 ea
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	2.000 ea
HA5027A01	HA4066A01 T-DRAIN X2 BAGGED	1.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
37EP3101A94MW	FRONT TEFC L&M 206 BRG W/O GRSR (WHITE)	1.000 ea
HW4032A01	BLACK DRAIN PLUG FOR WASH DOWN MOTORS	3.000 ea
HW5100A06	W2420-025 WVY WSHR (WB)	1.000 ea
37EP3300A23MW	WHITE EPOXY EP MACH COMPL	1.000 ea
HW4032A01	BLACK DRAIN PLUG FOR WASH DOWN MOTORS	3.000 ea
HW4600B51	SEAL 1.375 X 2.125 X 0.313 SINGLE LIP DB	1.000 ea
10XN2520S30	1/4-20 X 1 7/8 HEX HEAD SS	4.000 ea
XY3118S12	5/16-18 HEX NUT, STAINLESS STEEL	4.000 ea
07FH4011	WASHDOWN IEC FH W/PRIMED	1.000 ea
11XW1032S06	SCREW, HXWSHR HD SLDTYF 410 SS	3.000 ea
HW4600B74	V-RING SLINGER 1.125 X 1.445 X .24 VITON	1.000 ea
HW4600B31SP	V-RING SLINGER 1.438 X 1.758 X .24 VITON	1.000 ea
37CB4512	CONDUIT BOX LID FOR WASHDOWN 37 FRAME	1.000 ea
37GS1008A02	37 GS FOR CB LID - WHITE NEOPRENE	1.000 ea
59XW0832S07	TAPTITE II,HEX WSHR UNSLTD SER,410 S.S.,	4.000 ea
HW2502F21	#303 SS,SQ KEY 5/16 X 2.375	1.000 ea
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 ea
MJ5001A27	32220KN GRAY SEALER *MIN BUY 4 QTS=1GAL	0.001 qt
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
LB1164	LABEL,WARNING AND DRAIN	1.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
51XB1214A20	12-14X1.25 HXWSSLD SERTYB	1.000 ea

MG1025Z02	ACTIVATOR WILKOFAST 060.02HF	0.010 ga
MG1025W01	WILKOFAST, 781.01, SIGNAL WHITE #9003	0.028 ga
HA3104S25	THRUBOLT-5/16-18X14.75 SS	4.000 ea
LC0006	CONNECTION LABEL	1.000 ea
NP1669L	SS WD SUPER-E UL PREM REV MTG	1.000 ea
37PA1074	PALLET PACK GRP, PRINT BOX PK1026A06	1.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea

AC Induction Motor Performance Data
Record # 31008
Typical performance - not guaranteed values

Winding: 37WGS829-R001	**Type:** 3752M	**Enclosure:** TEFC

Nameplate Data			**575 V, 60 Hz: Single Voltage Motor**	
Rated Output (HP)		10	**Full Load Torque**	29.5 LB-FT
Volts		575	**Start Configuration**	direct on line
Full Load Amps		9.6	**Breakdown Torque**	136 LB-FT
R.P.M.		1770	**Pull-up Torque**	50 LB-FT
Hz	60 **Phase**	3	**Locked-rotor Torque**	69.8 LB-FT
NEMA Design Code	A **KVA Code**	K	**Starting Current**	83.9 A
Service Factor (S.F.)		1.15	**No-load Current**	4.52 A
NEMA Nom. Eff.	91.7 **Power Factor**	85	**Line-line Res. @ 25ºC**	1.42 Ω
Rating - Duty		40C AMB-CONT	**Temp. Rise @ Rated Load**	63°C
S.F. Amps			**Temp. Rise @ S.F. Load**	79°C
			Locked-rotor Power Factor	35
			Rotor inertia	1.28 LB-FT2

Load Characteristics 575 V, 60 Hz, 10 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	41	65	78	85	83	87	84
Efficiency	88.4	92	92.7	91.9	90.7	88.9	91.2
Speed	1794	1787	1780	1772	1763	1753	1767
Line amperes	5.03	6.21	7.76	9.59	12.4	14.5	11.3


ABB Motors and Mechanical Inc.


WINDING # 37WGS829

10 HP 3 PH 60 HZ 1770 RPM 575 V 3752M

Typical performance - not guaranteed values.


TORQUES(LB-FT): PO=136 PU=50 LR=69.8 LRA=83.9

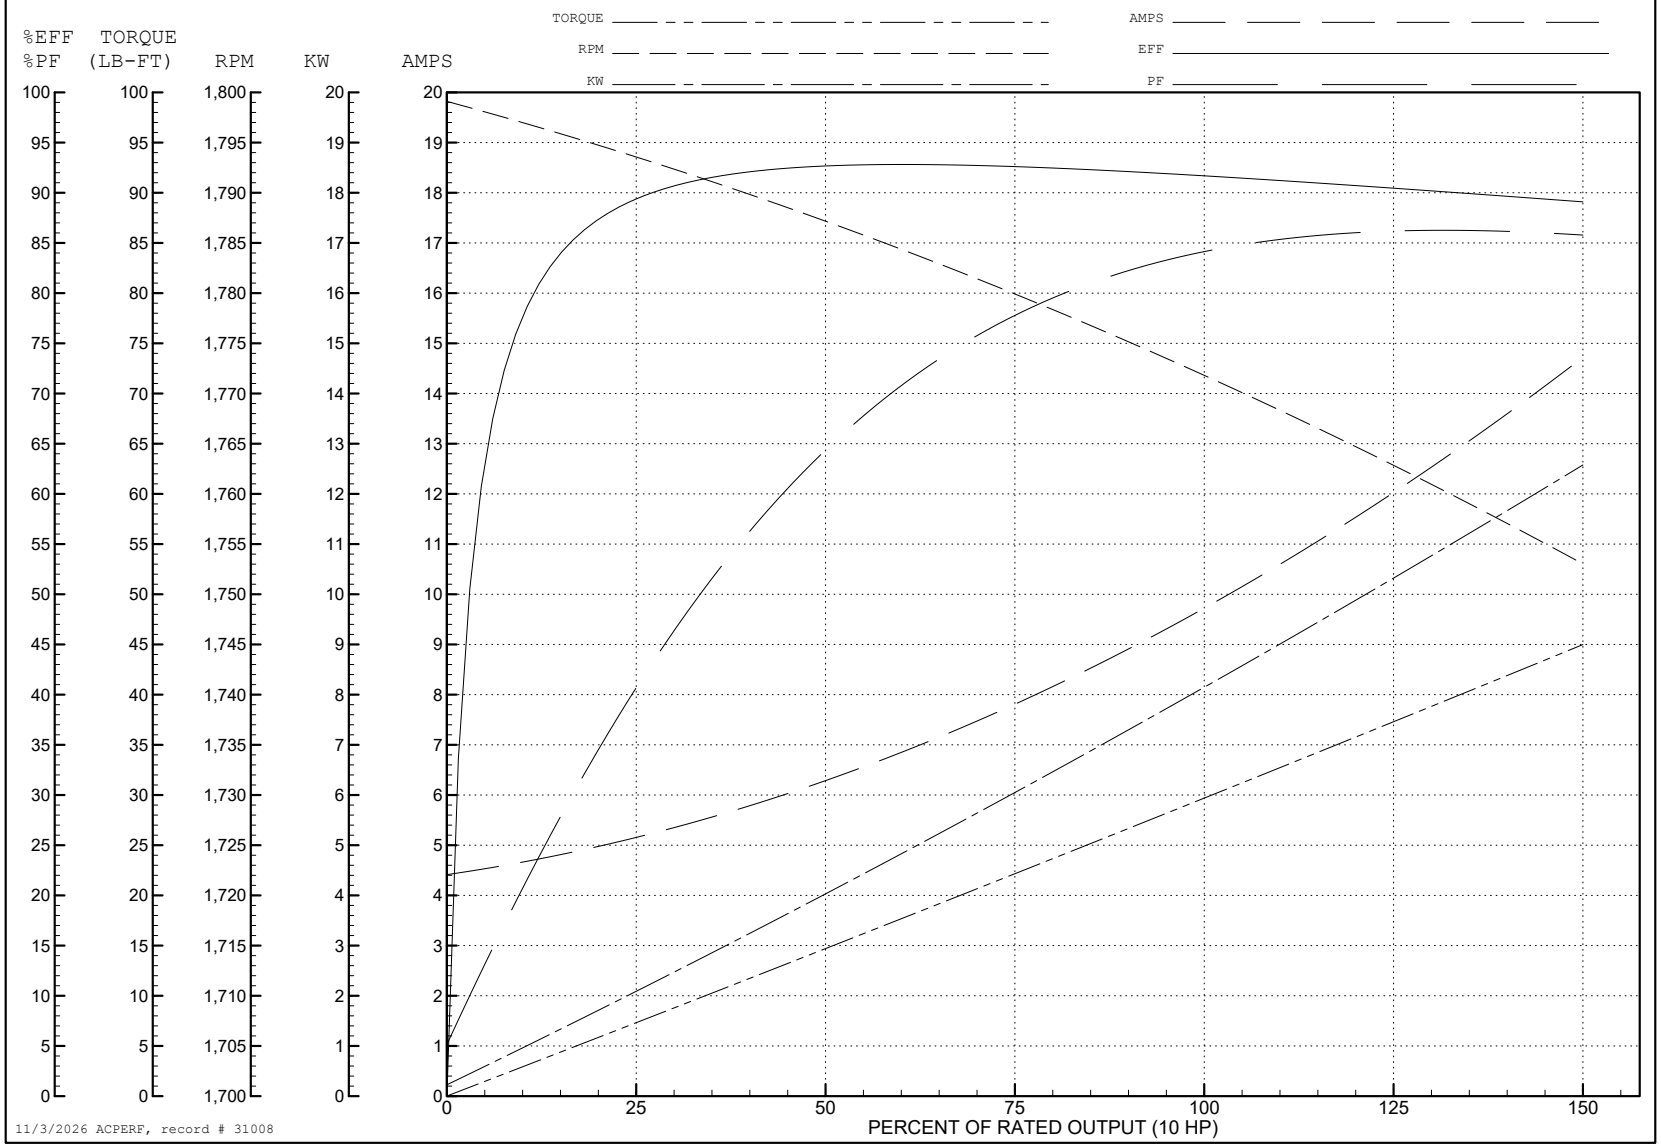


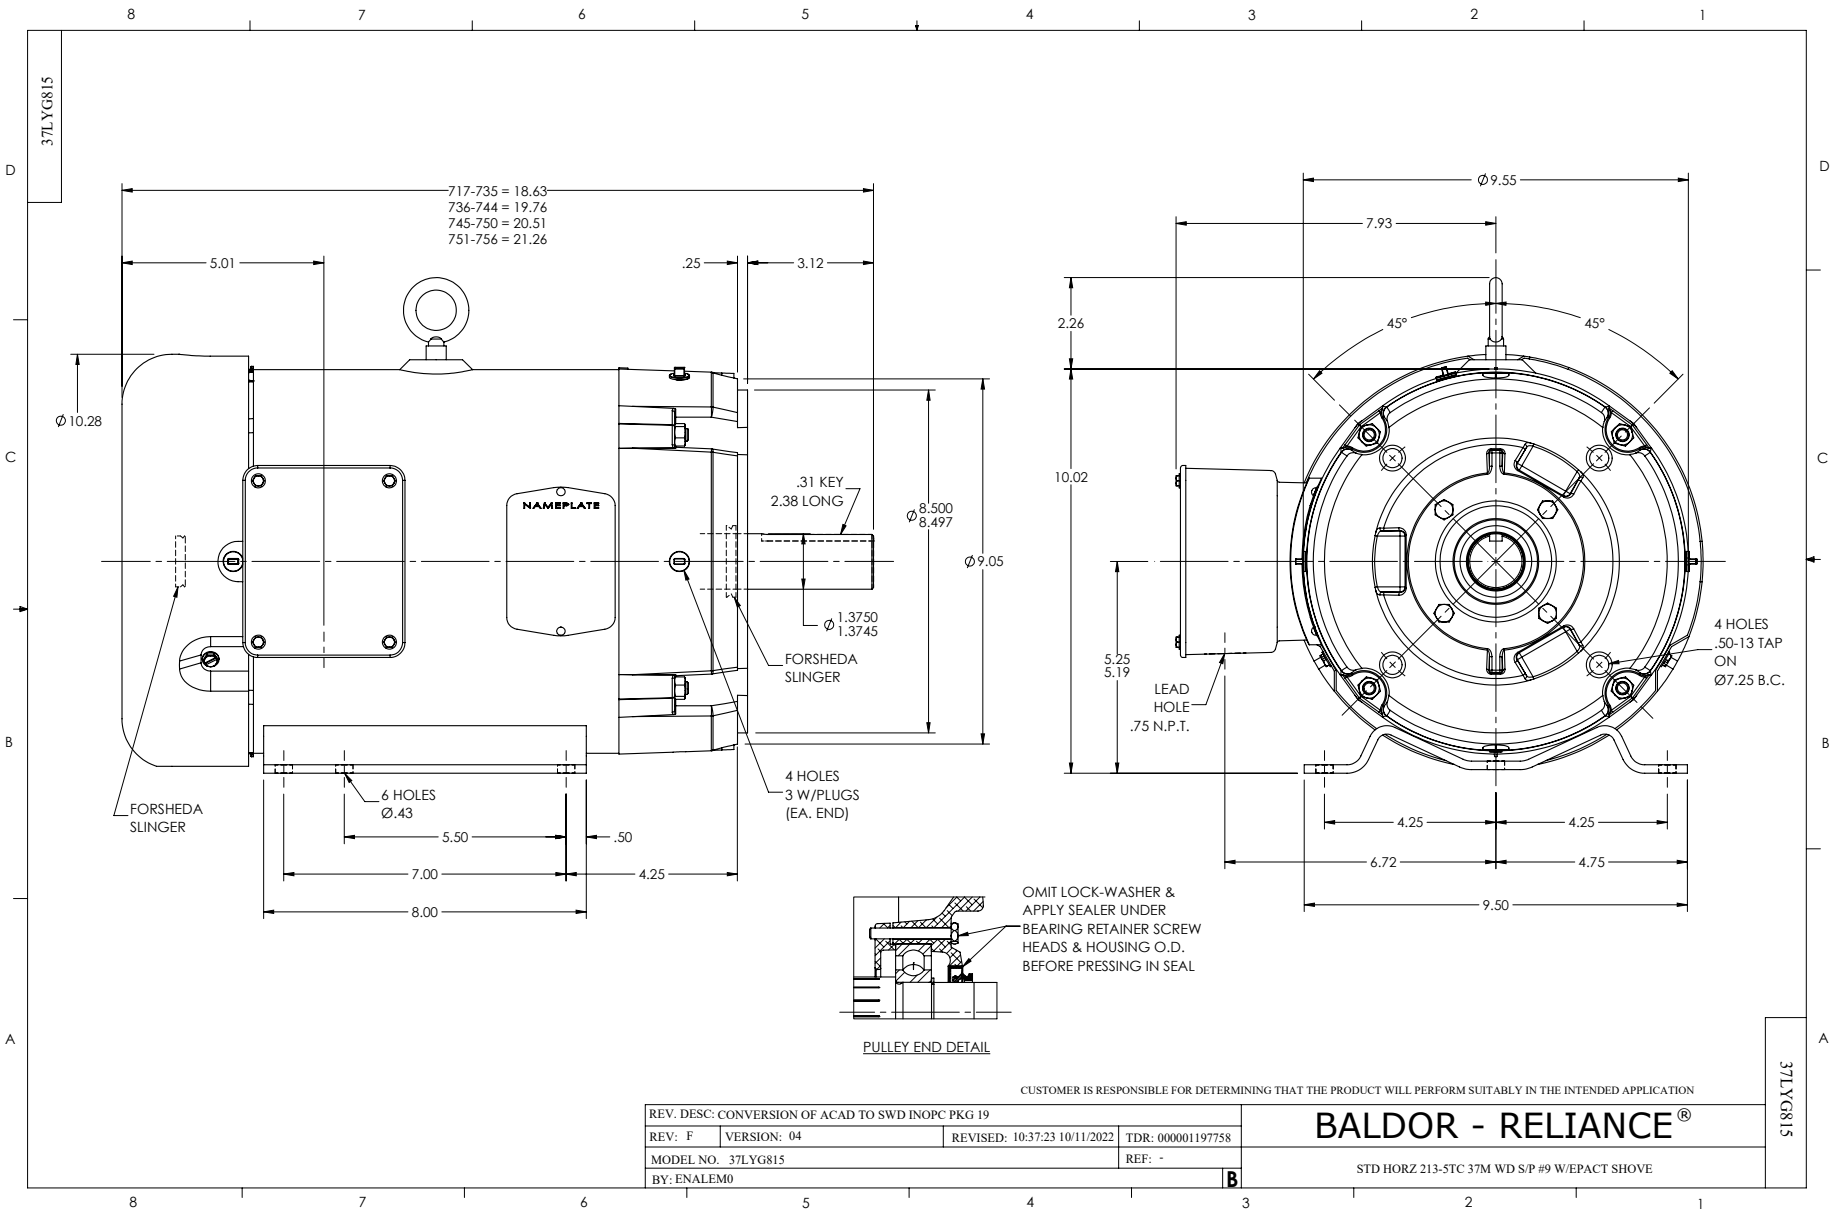
37LYG815
717-735 = 18.63
736-744 = 19.76
745-750 = 20.51
751-756 = 21.26
5.01
.25
3.12
Ø10.28
NAMEPLATE
.31 KEY
2.38 LONG
Ø8.500
8.497
Ø9.05
Ø1.3750
1.3745
FORSHEDA
SLINGER
FORSHEDA
SLINGER
6 HOLES
Ø.43
4 HOLES
3 W/PLUGS
(EA. END)
5.50
.50
7.00
4.25
8.00
Ø9.55
7.93
45°
45°
2.26
10.02
5.25
5.19
LEAD
HOLE
.75 N.P.T.
4 HOLES
.50-13 TAP
ON
Ø7.25 B.C.
4.25
4.25
6.72
4.75
9.50
OMIT LOCK-WASHER &
APPLY SEALER UNDER
BEARING RETAINER SCREW
HEADS & HOUSING O.D.
BEFORE PRESSING IN SEAL
PULLEY END DETAIL
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: CONVERSION OF ACAD TO SWD INOPC PKG 19
REV: F
VERSION: 04
REVISED: 10:37:23 10/11/2022
TDR: 000001197758
MODEL NO. 37LYG815
REF: -
BY: ENALEM0
B
BALDOR - RELIANCE®
STD HORZ 213-5TC 37M WD S/P #9 W/EPACT SHOVE
37LYG815


CD0006

TYPICAL WYE–CONNECTED MOTOR

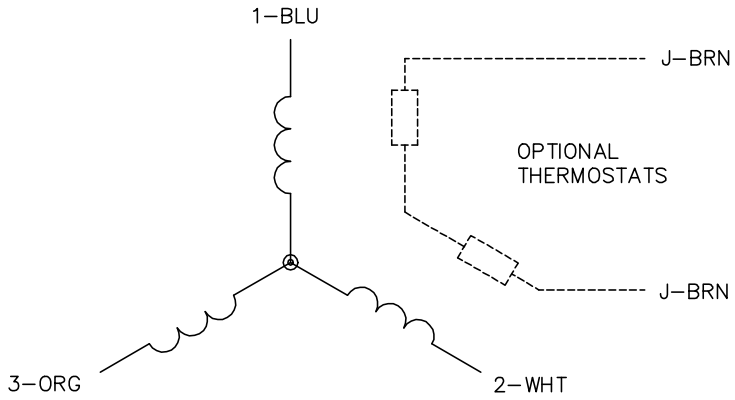



TYPICAL DELTA–CONNECTED MOTOR

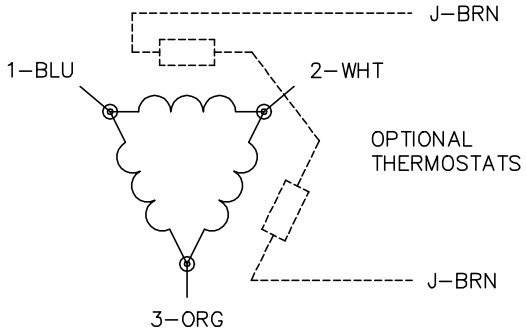

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10:24:49 02/19/2019	BY: ENBRIR0
MTL: –		

BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1