

ABB BALDOR RELIANCE III

Customer information packet

CHC3413A

.25HP, 1700RPM, 1PH, 60HZ, 48Z, 3414C, TEAO, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEAO
Frame	48Z
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Oil Capacitor Start and Run
Output @ Frequency	.250 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	115.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Resilient
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	2.400 A @ 230.0 V 4.800 A @ 115.0 V
Design Code	N
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	54.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Resilient Mount
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	2.4 a

Part Detail

Revision	AG
Type	AC
Mech. spec.	34K052
Base	
Status	PRD/A
Elec. spec.	34WG5632
Layout	34LYK052
Eff. date	07-25-2024
CD Diagram	CD0381
Poles	04
Leads	7#18
Proprietary	False
Created date	01-01-0001

Insulation Class	B
Inverter Code	Not Inverter
KVA Code	H
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Terminal Panel
Motor Lead Quantity/Wire Size	7 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3414C
Mounting Arrangement	F1
Number of Poles	4
Overall Length	11.35 IN
Power Factor	62
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Resilient Mount
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	0.500 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1700 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	Automatic Thermal Overload
Winding Thermal 1 Location	SB

Nameplate

NP1280L									
CAT.NO.	CHC3413A								
SPEC.	34K52-5632								
HP	.25								
VOLTS	115/230								
AMP	4.8/2.4								
RPM	1700								
FRAME	48Z		HZ	60		PH		1	
SER.F.	1.00		CODE	H	DES	N		CL	B
NEMA-NOM-EFF	54		PF	62					
RATING	40C AMB-CONT								
CC									
DE	6203		ODE	6203					
ENCL	TEAO		SN						

Parts List

Part number	Description	Quantity
SA008198	SA 34K52-5632	1.000 ea
RA004645	RA 34K52-5632	1.000 ea
OC2005F01	OVL OIL CAP 5MFD/370V	1.000 ea
34EP3204A01SP	FR ENDPLATE, MACH	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	3.000 ea
11XW0832G06	#8-32 X 3/8, TAPTITE II, HEX WSHR SLTD	1.000 ea
RM1000A03	CUSHION RING, MDL 17-33-34	1.000 ea
RM1000A03	CUSHION RING, MDL 17-33-34	1.000 ea
HA6004A01A	CLAMP CUSHION RING ASSY	2.000 ea
WD4100A01	DP-875 HEYCO PLUG OR 62MP0875 MICRO PLAS	1.000 ea
RM1001A01	GROMMET "MIDSTATES"	1.000 ea
51XB1016A05	10-16X5/16HX WA SL SR TYB (F/S)	2.000 ea
HW5100A03	WAVY WASHER (W1543-017)	1.000 ea
34EP3205A01	PU ENDPLATE, MACH	1.000 ea
XY1032A02	10-32 HEX NUT DIRECTIONAL SERRATION	4.000 ea
HW1000A10	#10 FLAT WASHER (SAE)	4.000 ea
LD5000A52	LEAD ASSY W/INTERNAL STAR RING TERMINALS	1.000 ea
11XT1032A06	10-32 X 3/8 HX WSHR HD SLTD TYPE 23	2.000 ea
34CB4501SP	TERMINAL BOX LID, STAMPED X (PLATED)	1.000 ea
34GS1005	GASKET, TERM PLATE LID	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	2.000 ea
34GS5003A01	FOAM SLEEVE, ID = 2 1/16" X 4 3/8"	1.000 ea
WD1000A16	2-520128-2 AMP FLAG TERMINAL(4M/RL)	9.000 ea
MG1025C02	WILKOFASST SG, 787.105, TAN	0.014 ga
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
34BA4001A01SP	RESILIENT BASE, 408-416	1.000 ea
SP5076SP	MODEL 34 TERMINAL PANEL WITH QUICK CONNE	1.000 ea
33CB4800A01	CAPACITOR COVER, STAMPED	1.000 ea
35GS3001A01	GASKET, CAPACITOR COVER	1.000 ea
HA3100A15	THRUBOLT 10-32 X 8.375	4.000 ea
LB1118	LABEL,WARNING (ROLL LABEL)	1.000 ea

LC0052	CONNECTION LABEL	1.000 ea
NP1280L	ALUM FARM DUTY UL CC THERMAL	1.000 ea
34PA1002	PKG GRP, PRINT PK1001A01	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea


ABB Motors and Mechanical Inc.


WINDING # 34WG5632

Typical performance - not guaranteed values.


0.25 HP 1 PH 60 HZ 1700 RPM 230 V 3414C

TORQUES (LB-FT) : PO=2.38 PU=0.25 LR=0.38 LRA=7.6

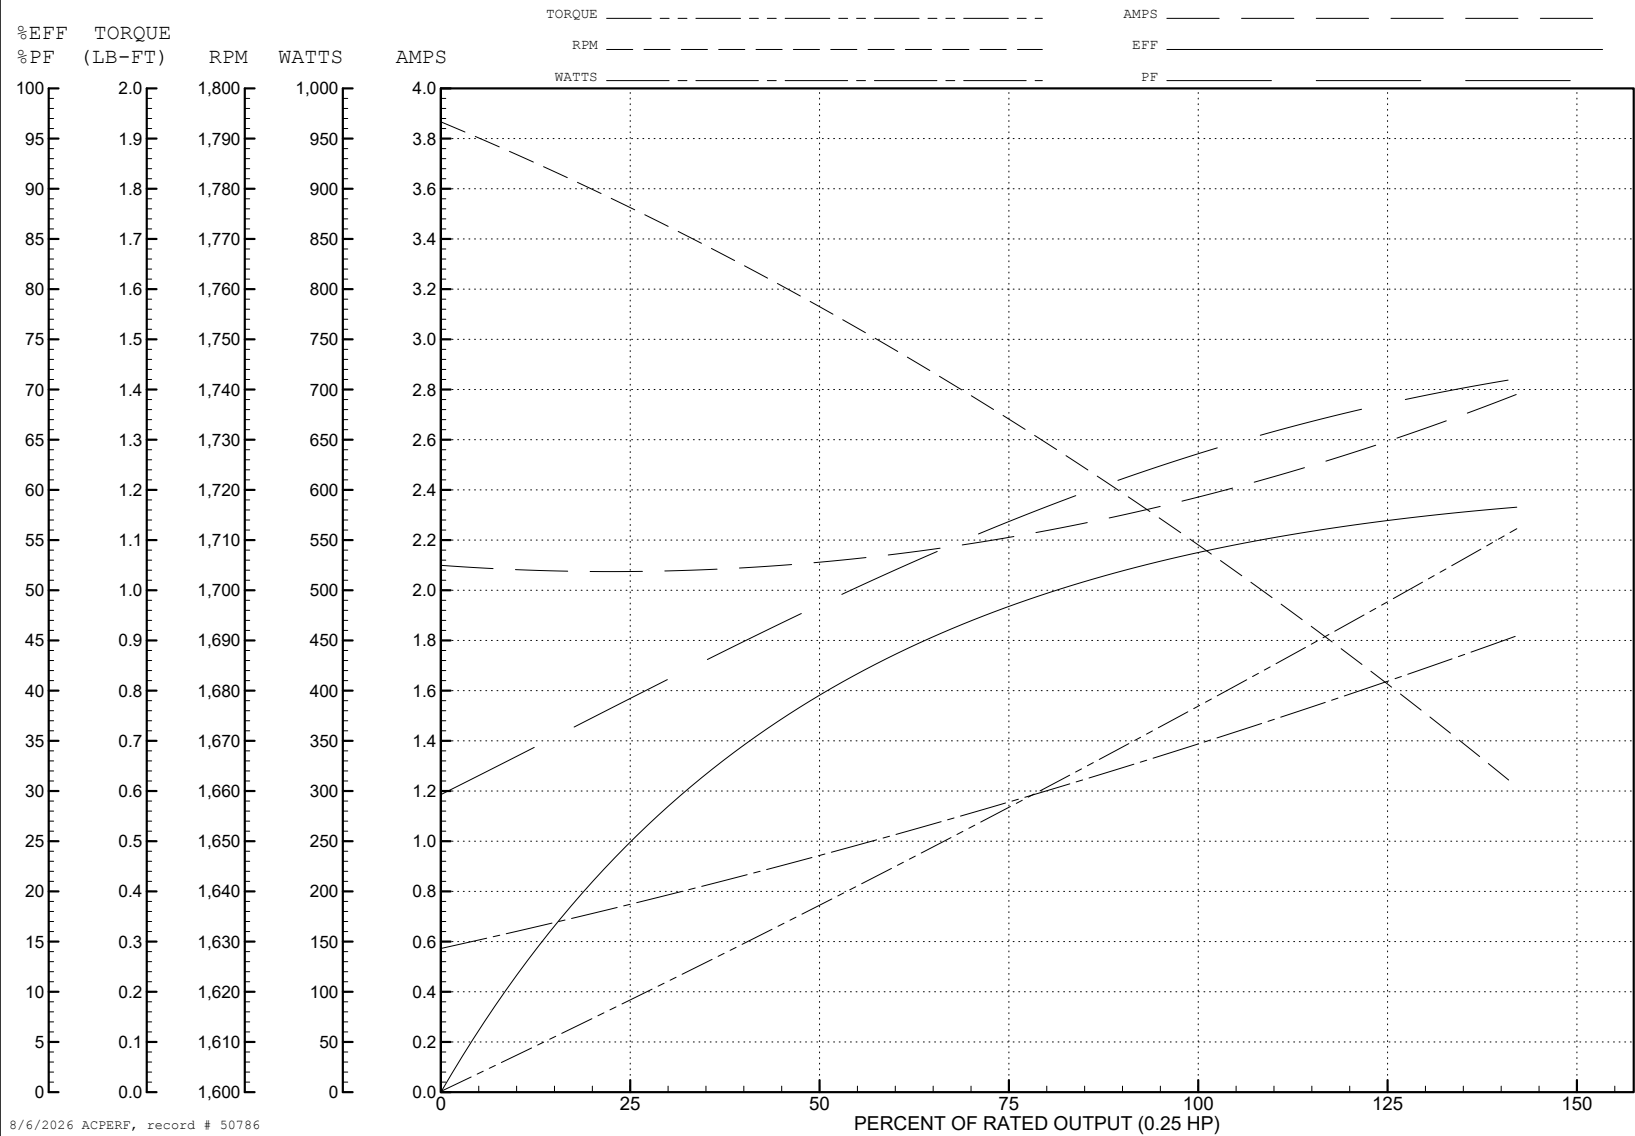



CD0381

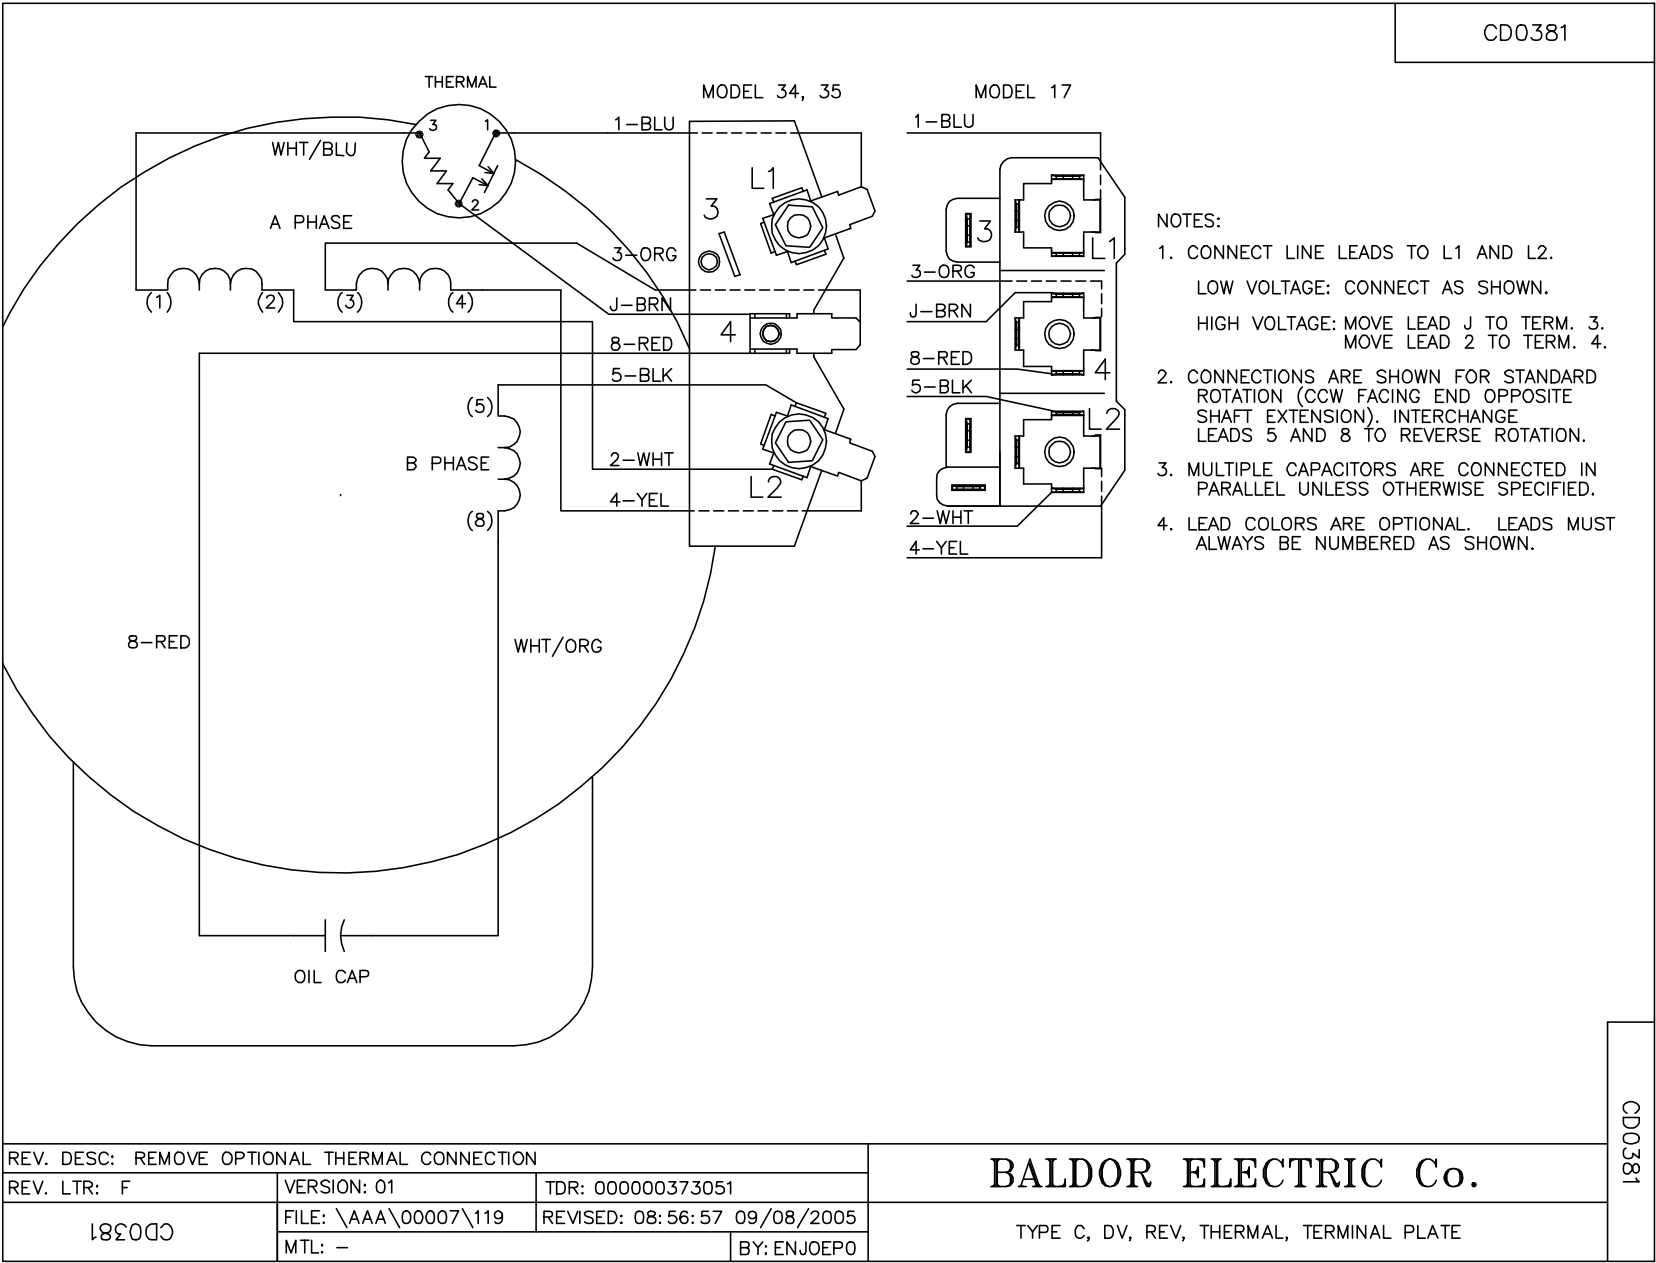

CD0381