

ABB BALDOR RELIANCE III

Customer information packet

CHC3525A

.5 AIR OVERHP, 1130RPM, 1PH, 60HZ, 56Z, 3528C

Class - None

Division - Not Applicable

Specifications

Enclosure	TEAO
Frame	56Z
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Oil Capacitor Start and Run
Output @ Frequency	.500 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	115.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CURUS C UR US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Resilient
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	2.400 A @ 230.0 V 4.800 A @ 115.0 V
Design Code	-
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	66.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	2.4 a
Insulation Class	F

Part Detail

Revision	D
Type	AC
Mech. spec.	35H317
Base	
Status	PRD/A
Elec. spec.	35WGZ930
Layout	35LYH317
Eff. date	12-02-2024
CD Diagram	CD0381
Poles	06
Leads	7#18
Proprietary	False
Created date	02-23-2023

Inverter Code	Not Inverter
KVA Code	C
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	7 @ 18 AWG
Motor Lead Termination	None
Motor Standards	NEMA
Motor Type	3528C
Mounting Arrangement	F1
Number of Poles	6
Overall Length	13.53 IN
Power Factor	95
Product Family	General Purpose
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	Resilient Mount
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.00
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible: Connected Standard
Shaft Slinger Indicator	No Slinger
Speed	1130 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	Automatic Thermal Overload
Winding Thermal 1 Location	SB
Winding Thermal 2	None

Nameplate

NP1280L									
CAT.NO.	CHC3525A								
SPEC.	35H317Z930G1								
HP	.5 AIR OVER								
VOLTS	115/230								
AMP	4.8/2.4								
RPM	1130								
FRAME	56Z		HZ	60		PH	1		
SER.F.	1.00		CODE	C	DES	-	CL	F	
NEMA-NOM-EFF	66		PF	95					
RATING	40C AMB-CONT								
CC									
DE	6203		ODE	6203					
ENCL	TEAO		SN						

Parts List

Part number	Description	Quantity
SA414882	SA 35H317Z930G1	1.000 ea
RA406651	RA 35H317Z930G1	1.000 ea
OC3040F18SP	7YL OIL CAP 40MFD/370V	1.000 ea
TP5059	GENERIC WELDED THERMAL, 7" LEAD KIT	1.000 ea
RM1001A01	GROMMET "MIDSTATES"	1.000 ea
11XW0832G06	#8-32 X 3/8, TAPTITE II, HEX WSHR SLTD	1.000 ea
LD5000A01	LEAD ASSY, ML1400DF14 7" RING TRM EA END	1.000 ea
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	2.000 ea
HW1003A10	WASHER, #10 EX TH LK, ZN X	2.000 ea
35EP3102A01SP	FR ENDPLATE, MACH	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	3.000 ea
RM1000A02	CUSHION RING, MODEL 35 SAME AS A07	1.000 ea
HA6005A01	CLAMP, BASE	2.000 ea
51XN1032A20	10-32 X 1 1/4 HX WS SL SR	1.000 ea
XY1032A02	10-32 HEX NUT DIRECTIONAL SERRATION	1.000 ea
35CB4802A02SP	CAPACITOR COVER, STAMPED X	1.000 ea
35GS3001A02	GASKET, CA.COVER, 5.38 LONG .06 CS301	1.000 ea
51XB1016A05	10-16X5/16HX WA SL SR TYB (F/S)	2.000 ea
HW5100A03	WAVY WASHER (W1543-017)	1.000 ea
35EP1101A01	PU ENPLATE, MACH	1.000 ea
RM1000A02	CUSHION RING, MODEL 35 SAME AS A07	1.000 ea
XY1032A02	10-32 HEX NUT DIRECTIONAL SERRATION	4.000 ea
HA6005A01	CLAMP, BASE	2.000 ea
51XN1032A20	10-32 X 1 1/4 HX WS SL SR	1.000 ea
XY1032A02	10-32 HEX NUT DIRECTIONAL SERRATION	1.000 ea
WD4100A01	DP-875 HEYCO PLUG OR 62MP0875 MICRO PLAS	1.000 ea
35CB4500	TERMINAL BOX LID STAMPED	1.000 ea
35GS1002	GASKET, 1/16 THICK LEXIDE	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	2.000 ea
HW2501D13	KEY, 3/16 SQ X 1.375	1.000 ea
HA7000A04	KEY RETAINER 0.625 DIA SHAFTS	1.000 ea

85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
MG1025C02	WILKOFASST SG, 787.105, TAN	0.017 ga
HA3100A22	THRUBOLT 10-32 X 10.125	4.000 ea
35BA4002B01	RESILIENT BASE, STAMPED	1.000 ea
SP5078A02	MODEL 35 TERMINAL PANEL, NO SWITCH, W/ L	1.000 ea
LB1118	LABEL,WARNING (ROLL LABEL)	1.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
LC0052	CONNECTION LABEL	1.000 ea
NP1280L	ALUM FARM DUTY UL CC THERMAL	1.000 ea
36PA1000	PKG GRP, PRINT PK1016A08	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea


ABB Motors and Mechanical Inc.


WINDING # 35WGZ930

Typical performance - not guaranteed values.

0.5 HP 1 PH 60 HZ 1130 RPM 230 V 3528C

TORQUES (LB-FT): PO=4.79 PU=1.5 LR=1.88 LRA=7.73

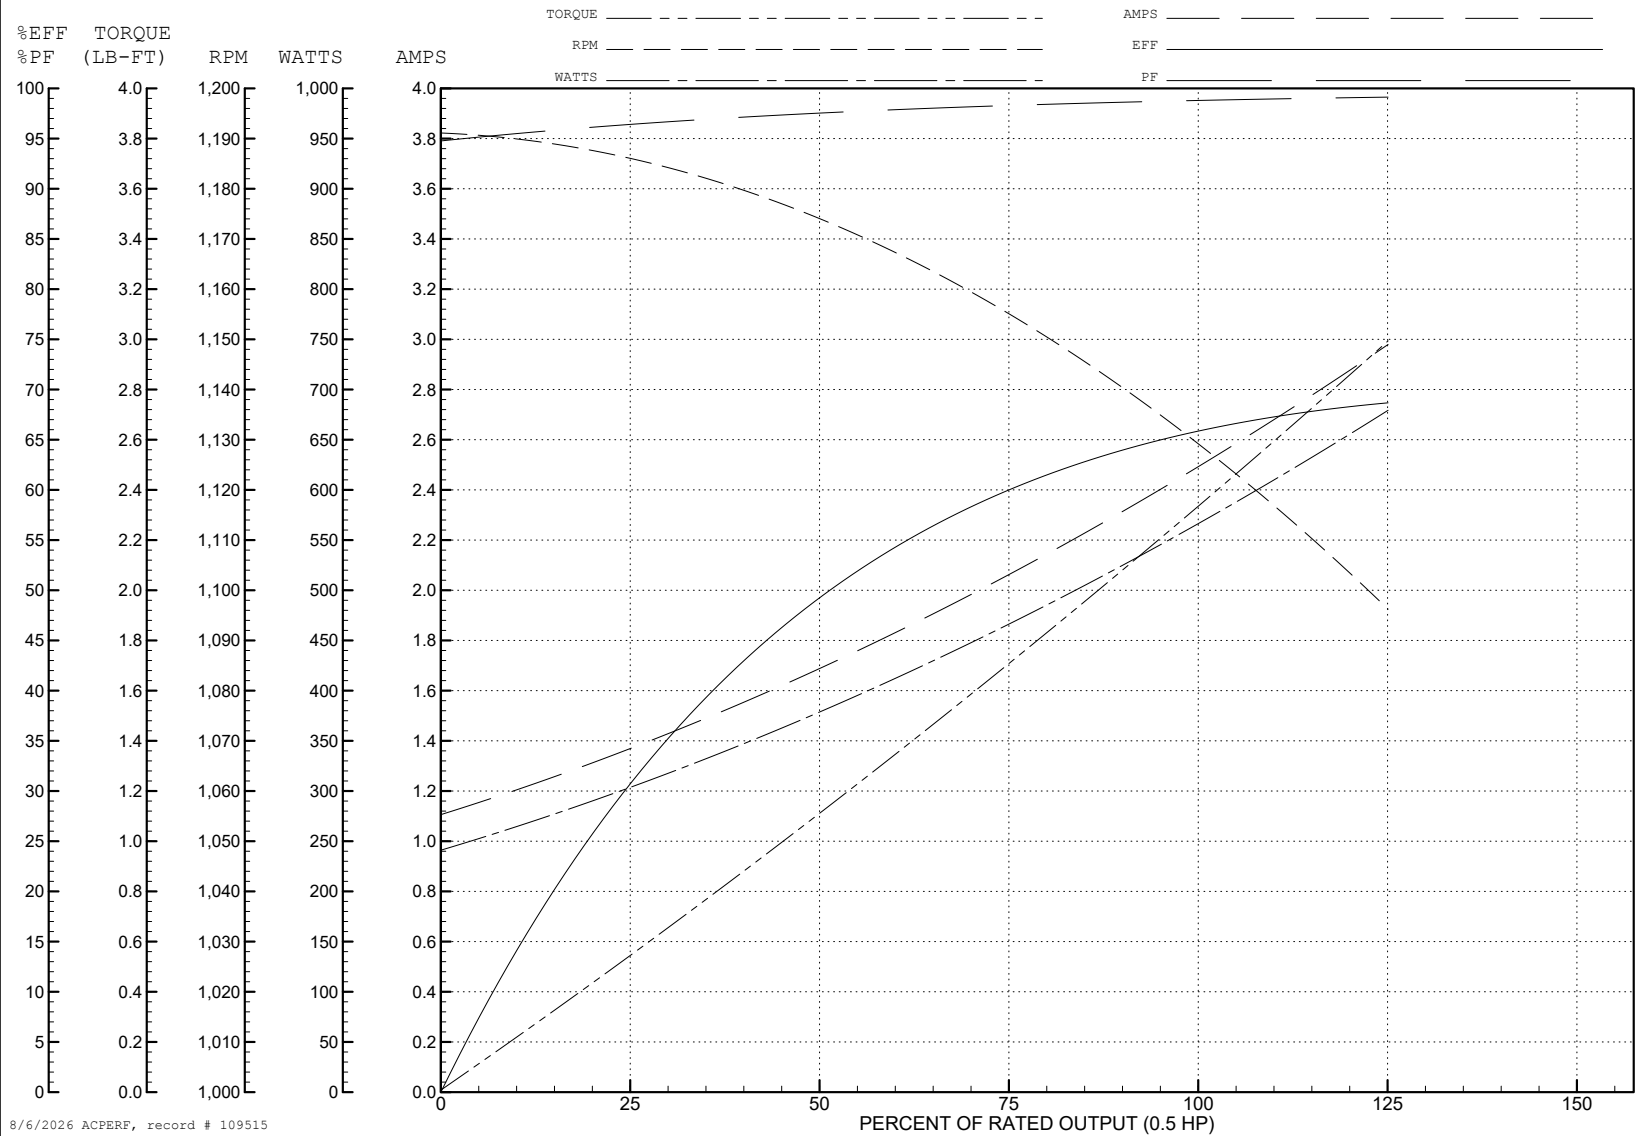

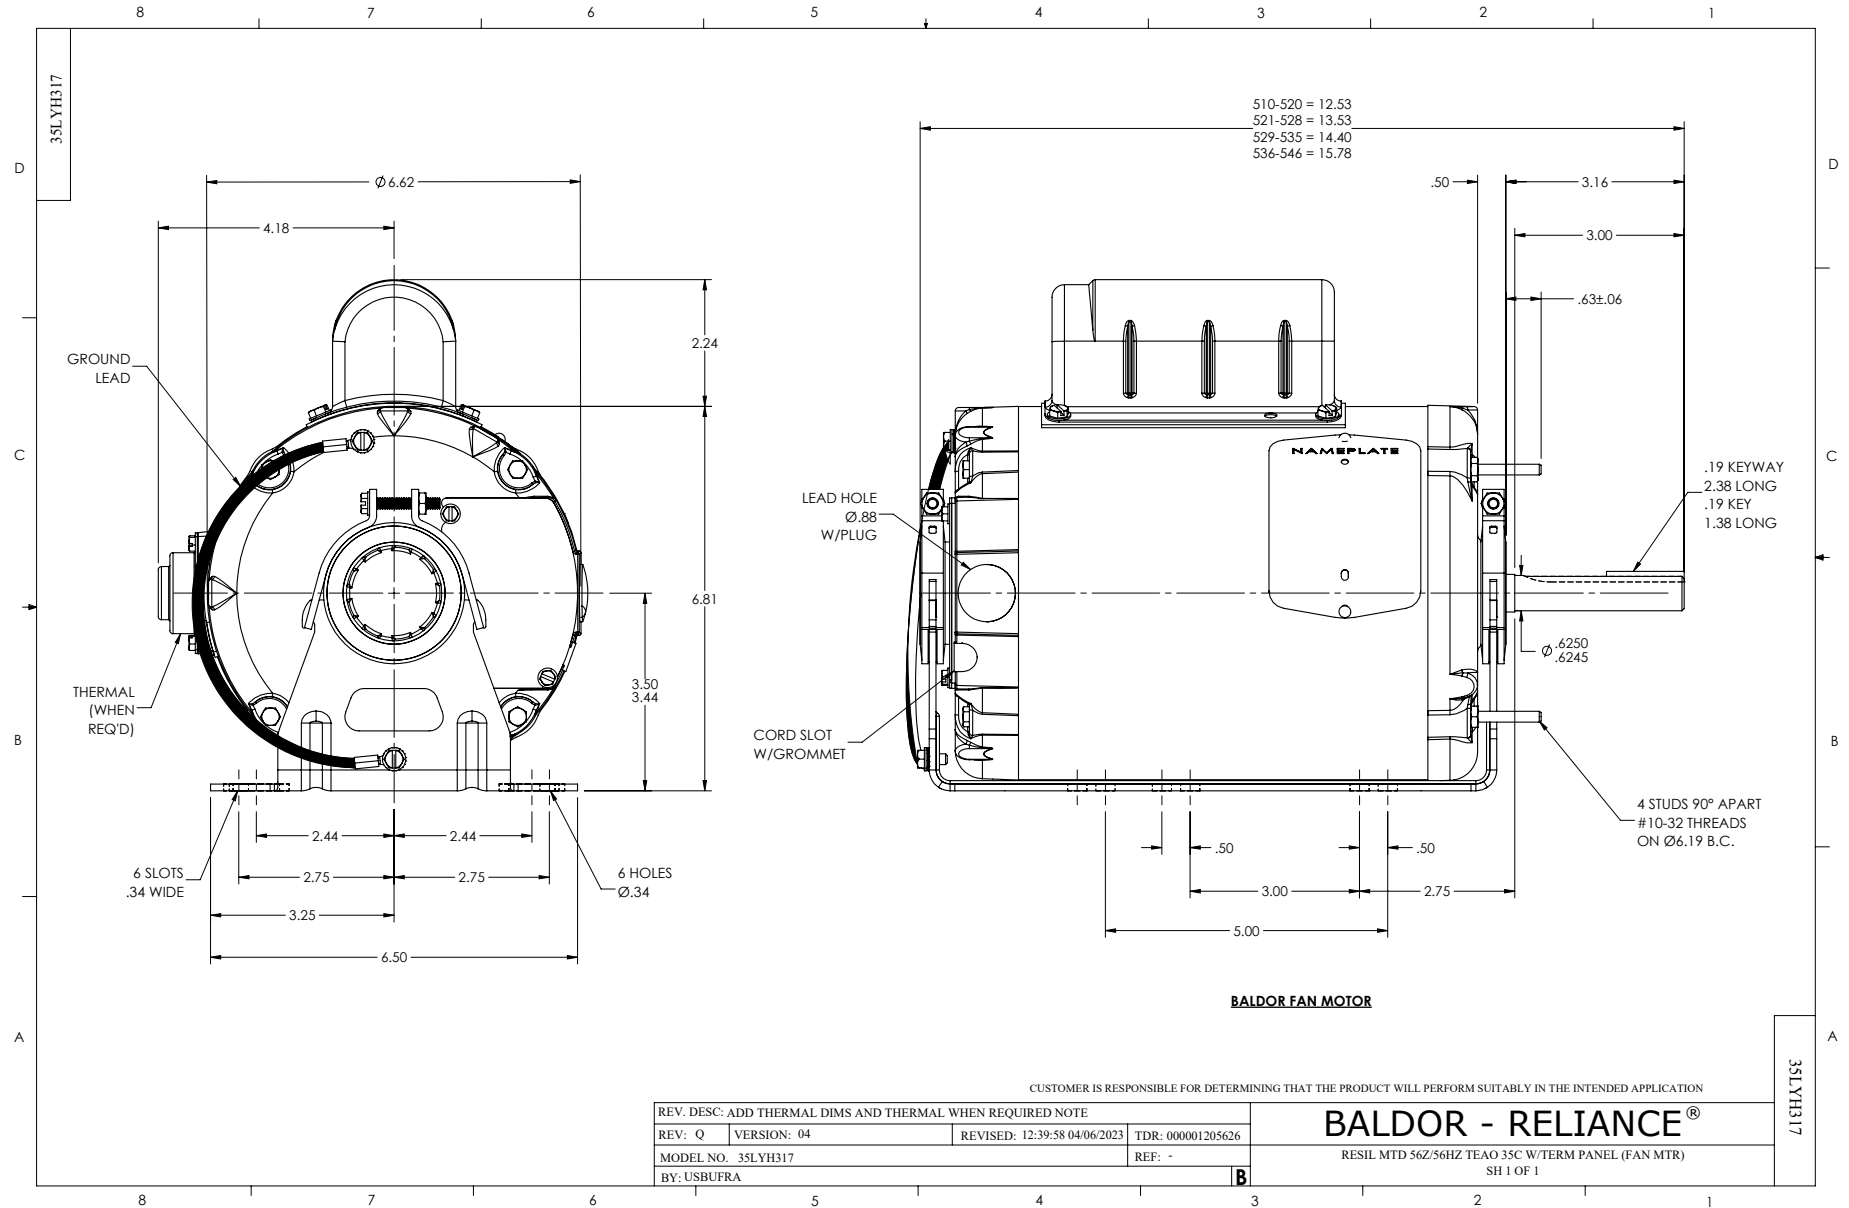

CD0381

