

ABB BALDOR RELIANCE III

Customer information packet

CPX21566T

5HP, 1160//965RPM, 3PH, 60HZ, 215T, XPFC, F1

Class - CLI GP C,D; CLII GP E,F,G

Division - Division I

Specifications

Enclosure	XPFC
Frame	215T
Frame Material	Iron
Frequency	50.00 Hz 60.00 Hz
Haz Area Class and Group	CLI GP C,D; CLII GP E,F,G
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	3.000 HP @ 50 HZ 5.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 190.0 V @ 50 HZ 460.0 V @ 60 HZ 380.0 V @ 50 HZ
Agency Approvals	UL CSA EEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	7.100 A @ 460.0 V 5.500 A @ 380.0 V 14.200 A @ 230.0 V 11.000 A @ 190.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT

Part Detail

Revision	E
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	07WGY242
Layout	07LY-000-018
Eff. date	04-13-2021
CD Diagram	CD0005
Poles	06
Leads	9#14
Proprietary	False
Created date	04-26-2019

Efficiency @ 100% Load	89.8 %
Electrically Isolated Bearing	Not Electrically Isolated
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	5.5 a
Insulation Class	F
Inverter Code	Inverter Duty
IP Rating	IP55
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	1800 rpm
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0748M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	20.02 IN
Power Factor	74
Product Family	General Purpose
Pulley Face Code	Standard
Rodent Screen	None
RoHS Status	ROHS NON-COMPLIANT
Service Factor	1.00
Shaft Diameter	1.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1160 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat

Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP2033XPSLEV											
NO.						CC	010A				
S/N						TEMP CODE	T3C				
SPEC.	07-0000-0120					INV.TYPE	PWM				
CAT.NO.	CPX21566T					C HP FR	60	C HP TO	90		
HP	5//3					CT HZ FROM	6	CT HZ TO	60		
VOLTS	230/460//190/380					VT HZ FROM	6	VT HZ TO	60		
AMPS	14.2/7.1//11/5.5				MAG CUR	6.4/3.2					
RPM	1160//965				MX RPM	1800					
HZ	60//50	PH	3	CL	F	NOM.EFF.	89.8				
SER.F.	1.00	DES	B	SL HZ	2	WK2	1.19				
FRAME	215T	RATING		40C AMB-CONT							
BLANK	55C AMB AT 1.00 SF SINEWAVE										
	NEMA MG-1 PART 5, IP55				1.15 SF SINEWAVE						

Parts List

Part number	Description	Quantity
SA369034	SA 07-0000-0120	1.000 ea
RA358574	RA 07-0000-0120	1.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
LC0145B01	CONNECTION LABEL	1.000 ea
NP2033XPSLEV	SS XP INV UL CSA-EEV CC CL-I GP-C&D	1.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
LB1081F	ALUM XP CAUTION LABEL (FS PLANT ONLY-	1.000 ea
HW3201A05	3/8-16 EYEBOLT	1.000 ea
07FH1003A05G	FAN HOUSING 307 EXPLOSION PROOF W/ GREAS	1.000 ea
10XN2520A12	1/4-20 X 3/4 HEX HEAD CAP	4.000 ea
37FN3002A01SP	EXFN, PLASTIC, 9.00 OD, 1.155 ID	1.000 ea
51XB1214A20	12-14X1.25 HWSSLD SERTYB	1.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
07EP1707A22G	FRONT ENDPLATE EXPLOSION PROOF(GROUP C &	1.000 ea
10XN3816K28	3/8-16 X 1.75 HEX HD CAP SCREW, GRADE 5	4.000 ea
HW1001A38	LOCKWASHER 3/8, ZINC PLT .688 OD, .382 I	4.000 ea
HA2009A25	SLINGER, FOR GROUP E MOTORS - 206 BRG.	1.000 ea
80XN0632J10	6-32 X 5/8 SET SCREW, HEX SOC, CUP PT	2.000 ea
HW5100A06	W2420-025 WVY WSHR (WB)	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
HW4500A19	1/4-28X1/4 SLOTTED PLUG F/S	1.000 ea
HW4506A02	BREATHING/DRAIN-EXP PROOF-.125-27 NPTF AI	1.000 ea
HW3022E05	.125 DIA X .500 ROLLED SPRING PIN	1.000 ea
07EP1709A09G	PUEP X-PROOF W/LOK'D BRG. GP-E (GREY)	1.000 ea
HW1001A38	LOCKWASHER 3/8, ZINC PLT .688 OD, .382 I	4.000 ea
10XN3816K28	3/8-16 X 1.75 HEX HD CAP SCREW, GRADE 5	4.000 ea
HA2009A56	SLINGER, FOR GROUP E MOTORS - 307 BRG.	1.000 ea
80XN0632J10	6-32 X 5/8 SET SCREW, HEX SOC, CUP PT	1.000 ea
10XN2520A36	1/4-20X 2 1/4 HEX HD X	4.000 ea
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	4.000 ea

HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
HW4500A19	1/4-28X1/4 SLOTTED PLUG F/S	1.000 ea
HW4506A02	BREATHER/DRAIN-EXP PROOF-.125-27 NPTF AI	1.000 ea
HW3022E05	.125 DIA X .500 ROLLED SPRING PIN	1.000 ea
07CB1000A01G	CONDUIT BOX MACH, W/EPOXY GRAY	1.000 ea
10XN3118A16	5/16-18X1 HEX HD CAP	4.000 ea
WD1000B17	T&B CX35TN OR L35P TERMINAL LUG	1.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
07CB1502A01G	CONDUIT BOX LID MACH (DUCTILE IRON) GRAY	1.000 ea
84XN2520J16	1/4-20 X 1 SOC HD CAP SCREW	4.000 ea
MG1500Y02	WILKOPON PRIMER YELLOW	0.022 ga
MG1025G29	WILKOFAS, 789.229, DARK CHARCOAL GRAY	0.022 ga
07PA1011	PKG GRP, 07 CAST IRON PK1181	1.000 ea
10XL3807A28	3/8-7 X 1 3/4" LAG SCREW	2.000 ea
HW2501F21	KEY, 5/16 SQ X 2.375	1.000 ea
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 ea
MJ5001A27	32220KN GRAY SEALER *MIN BUY 4 QTS=1GAL	0.001 qt

AC Induction Motor Performance Data

Record # 74889

Typical performance - not guaranteed values

Winding: 07WGY242-R003			Type: 0748M		Enclosure: TEFC			
Nameplate Data				460 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		5//3		Full Load Torque		22.9 LB-FT		
Volts		230/460//190/380		Start Configuration		direct on line		
Full Load Amps		14.2/7.1//11/5.5		Breakdown Torque		68.1 LB-FT		
R.P.M.		1158//965		Pull-up Torque		40.7 LB-FT		
Hz		60//50	Phase	3	Locked-rotor Torque		48.9 LB-FT	
NEMA Design Code		B		KVA Code	J	Starting Current		45.7 A
Service Factor (S.F.)		1		No-load Current		3.19 A		
NEMA Nom. Eff.		89.8	Power Factor		74	Line-line Res. @ 25°C		1.91 Ω
Rating - Duty		40C		AMB-CONT		Temp. Rise @ Rated Load		53°C
						Locked-rotor Power Factor		21.7
						Rotor inertia		1.19 LB-FT2

Load Characteristics 460 V, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	39	58	69	74	76	76
Efficiency	86.7	90.4	90.9	89.8	88.2	86.1
Speed	1189	1179	1170	1158	1144	1126
Line amperes	3.53	4.38	5.57	7.08	8.71	10.7


ABB Motors and Mechanical Inc.

WINDING # 07WGY242

Typical performance - not guaranteed values.

5 HP 3 PH 60 HZ 1158 RPM 460 V 0748M

TORQUES (LB-FT): PO=68.1 PU=40.7 LR=48.9 LRA=45.7

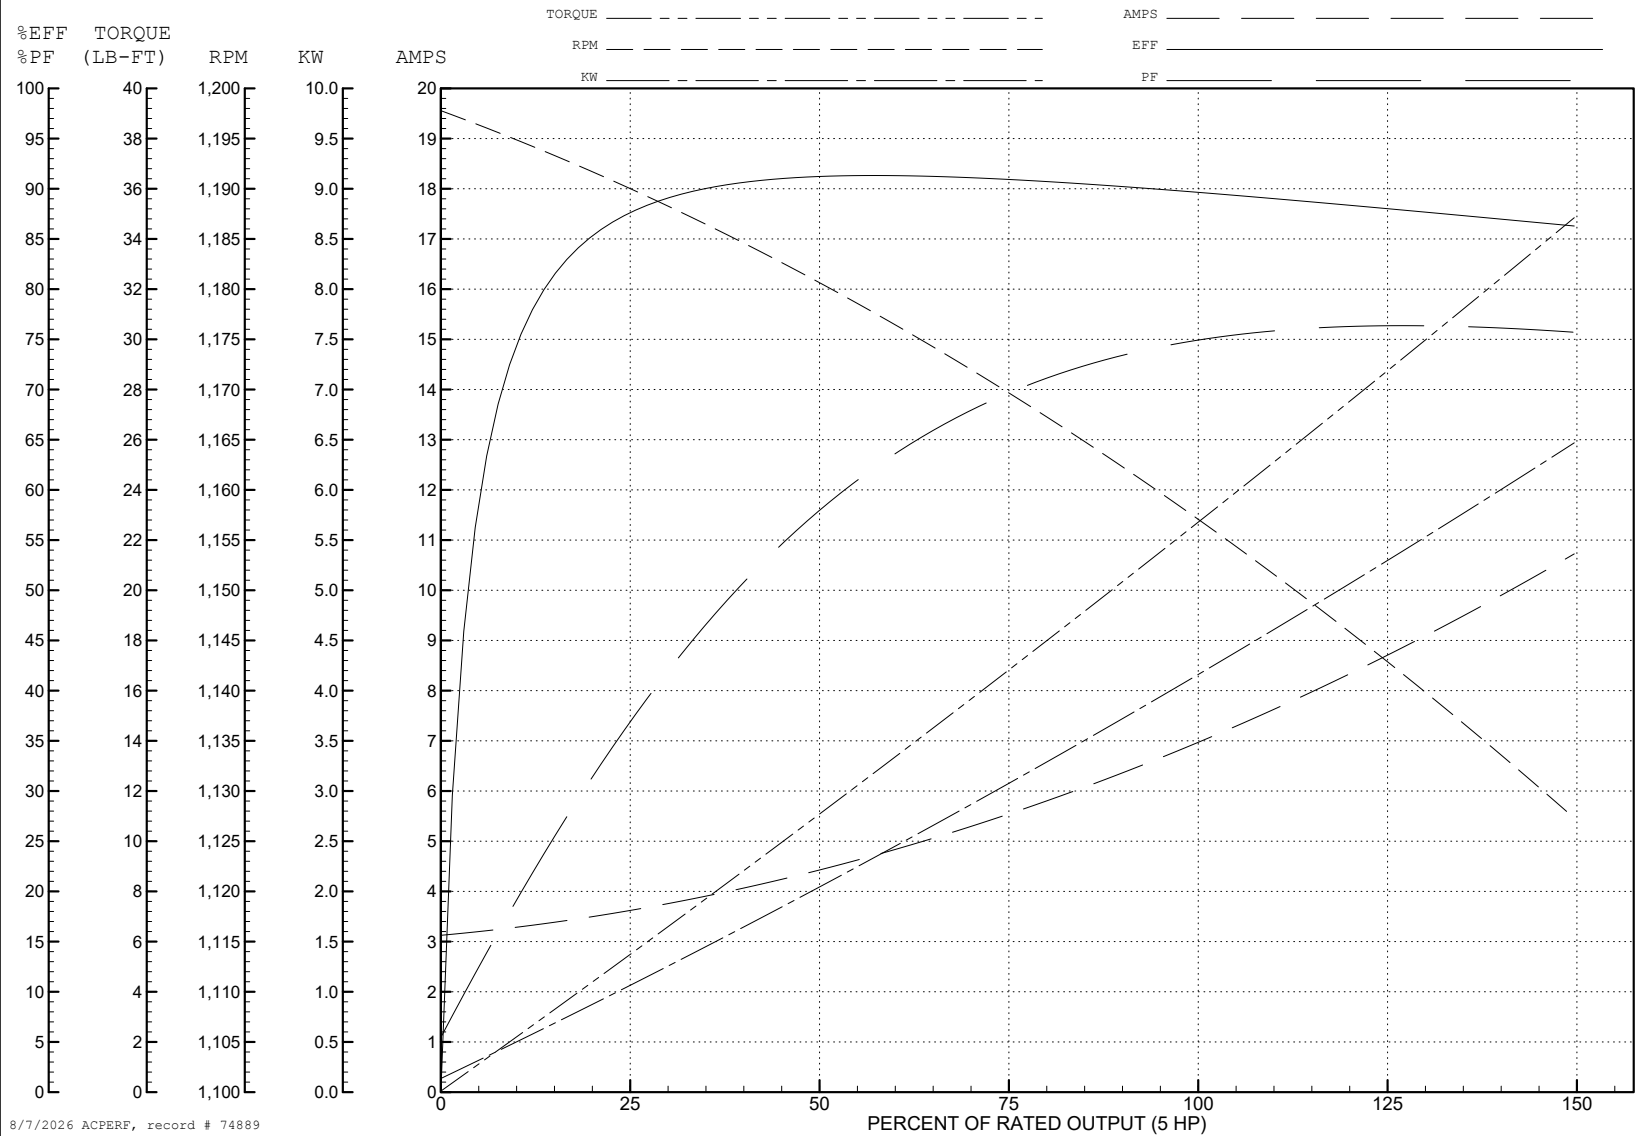

AC Induction Motor Performance Data

Record # 74890

Typical performance - not guaranteed values

Winding: 07WGY242-R003			Type: 0748M		Enclosure: TEFC		
Nameplate Data			380 V, 50 Hz: High Voltage Connection				
Rated Output (HP)		5//3	Full Load Torque		16.41 LB-FT		
Volts		230/460//190/380	Start Configuration		direct on line		
Full Load Amps		14.2/7.1//11/5.5	Breakdown Torque		65.64 LB-FT		
R.P.M.		1158//965	Pull-up Torque		44.98 LB-FT		
Hz	60//50	Phase	3	Locked-rotor Torque		54.05 LB-FT	
NEMA Design Code		B	KVA Code	J	Starting Current		44.82 A
Service Factor (S.F.)		1	No-load Current		3.15 A		
NEMA Nom. Eff.		89.8	Power Factor	74	Line-line Res. @ 25°C		1.91 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		36°C
					Locked-rotor Power Factor		25.1
					Rotor inertia		1.19 LB-FT ²

Load Characteristics 380 V, 50 Hz, 3 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	32	50	62	69	74	76
Efficiency	80.8	87.3	89	88.9	88.1	87
Speed	991	984	978	970	961	951
Line amperes	3.36	3.88	4.61	5.57	6.56	7.68

ABB Motors and Mechanical Inc.

WINDING # 07WGY242

Typical performance - not guaranteed values.

3 HP 3 PH 50 HZ 970 RPM 380 V 0748M

TORQUES (LB-FT) : PO=65.64 PU=44.98 LR=54.05 LRA=44.82

