

ABB BALDOR RELIANCE III

Customer information packet

CTM2333T

15HP, 1760RPM, 3PH, 60HZ, 254T, 0756M, TEAO, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEAO
Frame	254T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	15.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	208.0 V @ 60 HZ 230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	40.000 A @ 208.0 V 38.000 A @ 230.0 V 19.000 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater

Part Detail

Revision	A
Type	AC
Mech. spec.	07N393
Base	
Status	PRD/A
Elec. spec.	07WGT572
Layout	07LYN393
Eff. date	08-17-2023
CD Diagram	CD0005
Poles	04
Leads	9#12
Proprietary	False
Created date	03-17-2023

High Voltage Full Load Amps	19.0 a
Insulation Class	F
Inverter Code	Not Inverter
KVA Code	J
Lifting Lugs	Vertical Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 12 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0756M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	22.16 IN
Power Factor	81
Product Family	Chemical Processing (Not DC)
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	Standard
Pulley Shaft Indicator	Tapped & Key
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1760 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1258									
CAT.NO.	CTM2333T								
SPEC.	07N393T572G1								
HP	15								
VOLTS	208-230/460								
AMP	40-38/19								
RPM	1760								
FRAME	254T	HZ		60		PH		3	
SER.F.	1.15	CODE		J	DES		A	CL	F
NEMA-NOM-EFF	91	PF		81					
RATING	40C AMB-CONT								
CC									
DE	6309	ODE		6206					
ENCL	TEAO	SN							
	1700 FPM AT 170CFM								

Parts List

Part number	Description	Quantity
SA412867	SA 07N393T572G1	1.000 ea
RA404554	RA 07N393T572G1	1.000 ea
HW3201A01	1/2-13 EYEBOLT	1.000 ea
HA7205	"L" SHAPE LIFTING LUG FOR 37,39 & 40 FRA	2.000 ea
09CB1002A26G	KOBX W/1.00 NPT LD HL .25-20 TAP FOR LID	1.000 ea
RM1017	LEAD SEPERATOR GASKET MODEL 307 1/8" THK	1.000 ea
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	2.000 ea
HA4044A00	PLUG,PIPE 1/8 NPT PLASTIC SQUARE HEAD	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
HW3001B01	BRASS CUP WASHER, FOR #10 SCREW	1.000 ea
10XN2520S06	1/4 20X3/8 HX HD CAP S.S.	1.000 ea
WD1000B16	T&B CX70TN OR L70P TERMINAL LUG	1.000 ea
37EP1100C42G	35 EP FR TENV 206 BRG NO GRSR .125 NPT(E	1.000 ea
HA4054	SHORT T-DRAIN FITTING, .125" N.P.T.	1.000 ea
HA4044A00	PLUG,PIPE 1/8 NPT PLASTIC SQUARE HEAD	2.000 ea
HW5100A06	W2420-025 WVY WSHR (WB)	1.000 ea
07EP1116A59G	PUEP, 309 LOCK BRG, (3).125 NPT(GRAY)	1.000 ea
HW4600A27	SEAL 1.750 X 2.441 X 0.313 SINGLE LIP	1.000 ea
HA4054	SHORT T-DRAIN FITTING, .125" N.P.T.	1.000 ea
HA4044A00	PLUG,PIPE 1/8 NPT PLASTIC SQUARE HEAD	2.000 ea
10XN2520A32	1/4 X 2 HEX HEAD CAP SCR,GRADE 2	4.000 ea
XY3118A12	5/16-18 HEX NUT DIRECTIONAL SERRATION	4.000 ea
12CB1503G	CONDUIT BOX CAST. (GRAY)	1.000 ea
12GS1002	GASKET, CONDUIT BOX LID, NEOP	1.000 ea
10XN2520A12	1/4-20 X 3/4 HEX HEAD CAP	2.000 ea
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	2.000 ea
HW2501G25	KEY, 3/8 SQ X 2.875	1.000 ea
HA7000A03	KEY RETAINER RING 1.62 & 1.88 DIA. SH	1.000 ea
HW4600B67	V-RING SLINGER 1.770 X 2.170 X .28 VITON	1.000 ea
HW4600G53	DOME SLINGER, 5.438 OD X 1.620/1.562 ID	1.000 ea
MJ5001A27	32220KN GRAY SEALER *MIN BUY 4 QTS=1GAL	0.001 qt

85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
LB1182	WARNING LABEL FOR MOTORS WITH EYENUTS	1.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
MG1025G29	WILKOFAST, 789.229, DARK CHARCOAL GRAY	0.036 ga
HA3104A25	THRUBOLT .31-18 X 14.75	4.000 ea
LC0005	CONN.DIA.,TY M,9-LD,DUAL VOLT,REVERSING	1.000 ea
NP1258	SS CP UL CC	1.000 ea
07PA1011	PKG GRP, 07 CAST IRON PK1181	1.000 ea
10XL3807A28	3/8-7 X 1 3/4" LAG SCREW	2.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea

ABB Motors and Mechanical Inc.

WINDING # 07WGT572

Typical performance - not guaranteed values.

15 HP 3 PH 60 HZ 1760 RPM 460 V 0756M

TORQUES (LB-FT): PO=168 PU=64.6 LR=102 LRA=149

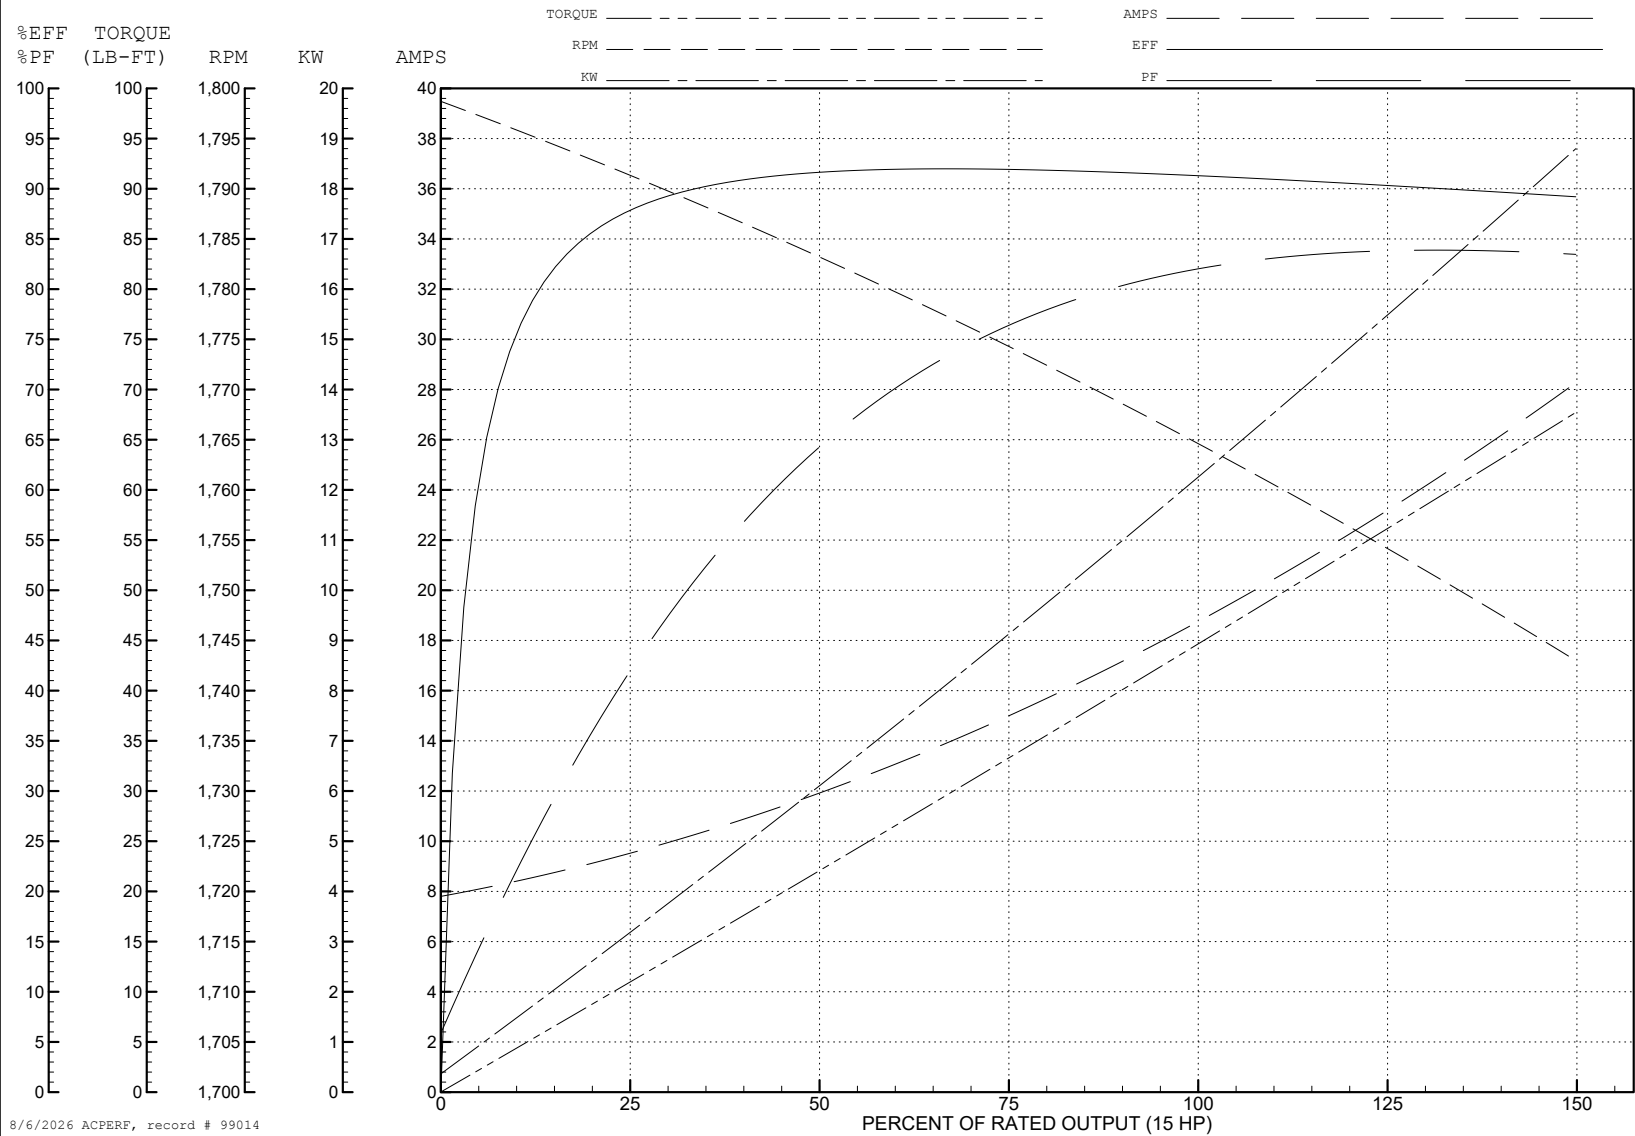



ABB Motors and Mechanical Inc.


WINDING # 07WGT572

Typical performance - not guaranteed values.

15 HP 3 PH 60 HZ 1760 RPM 208 V 0756M

TORQUES (LB-FT): PO=135 PU=50.5 LR=79.4 LRA=262

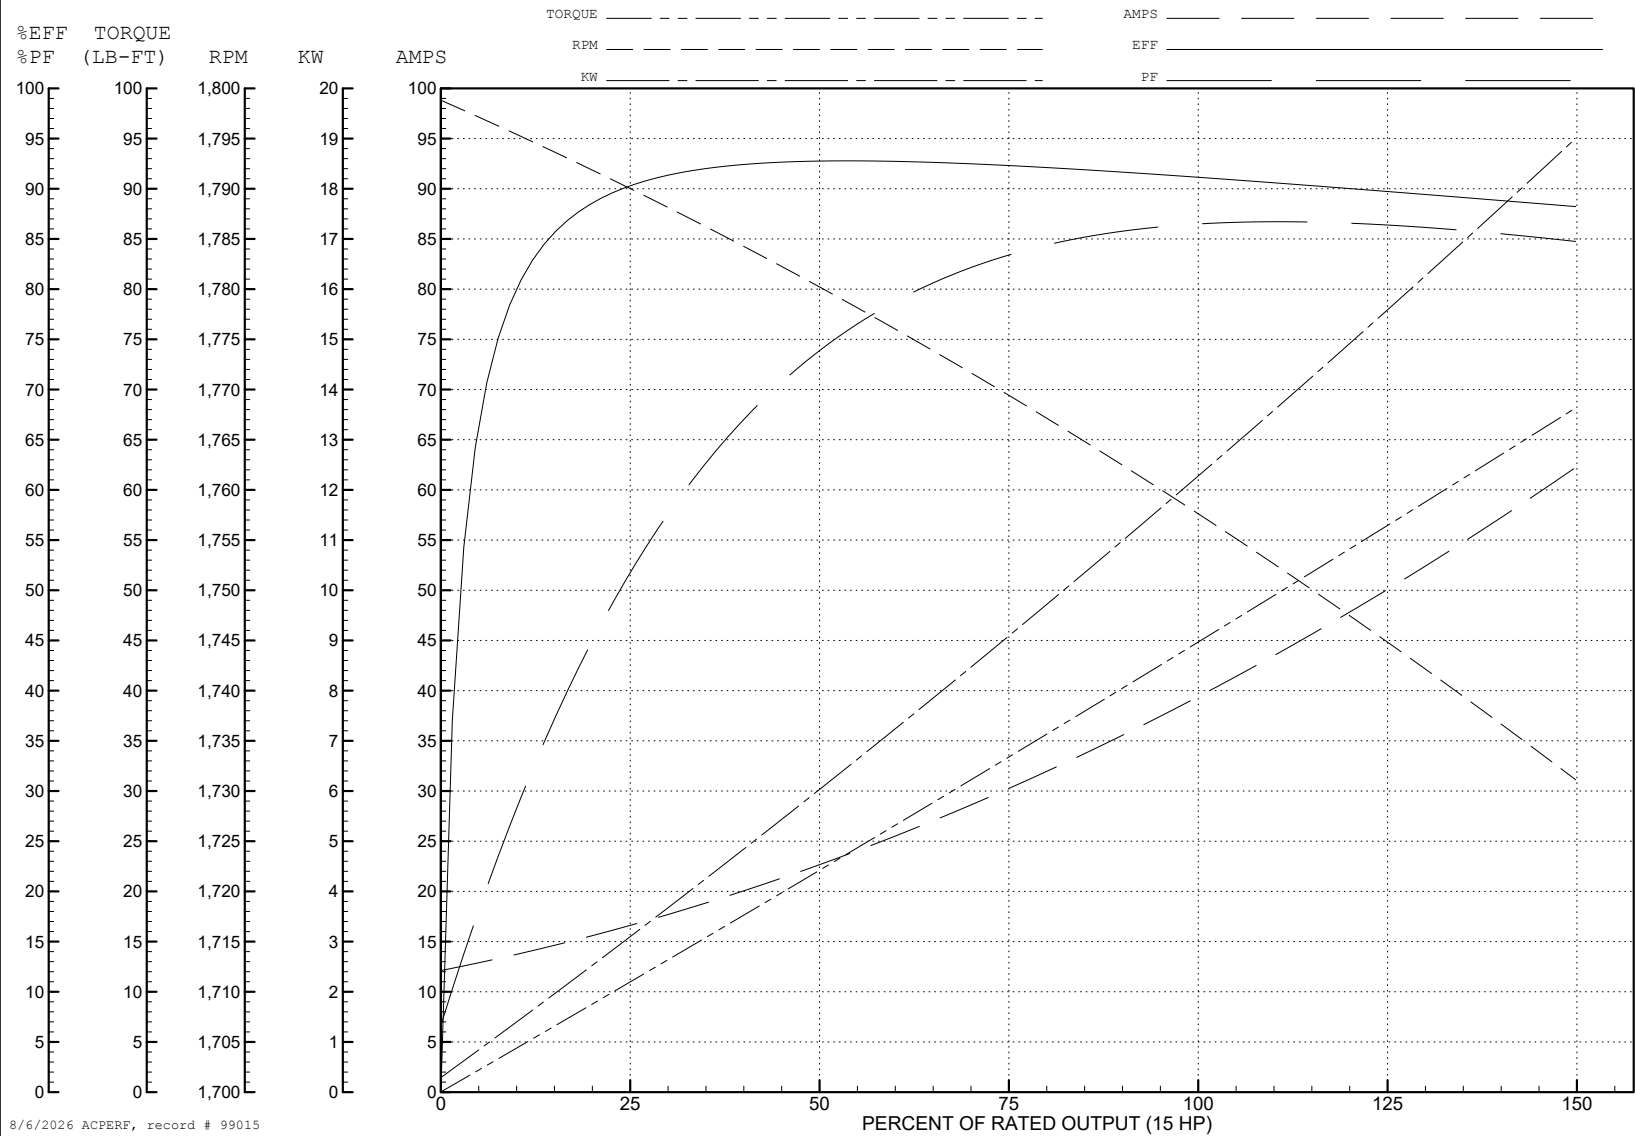

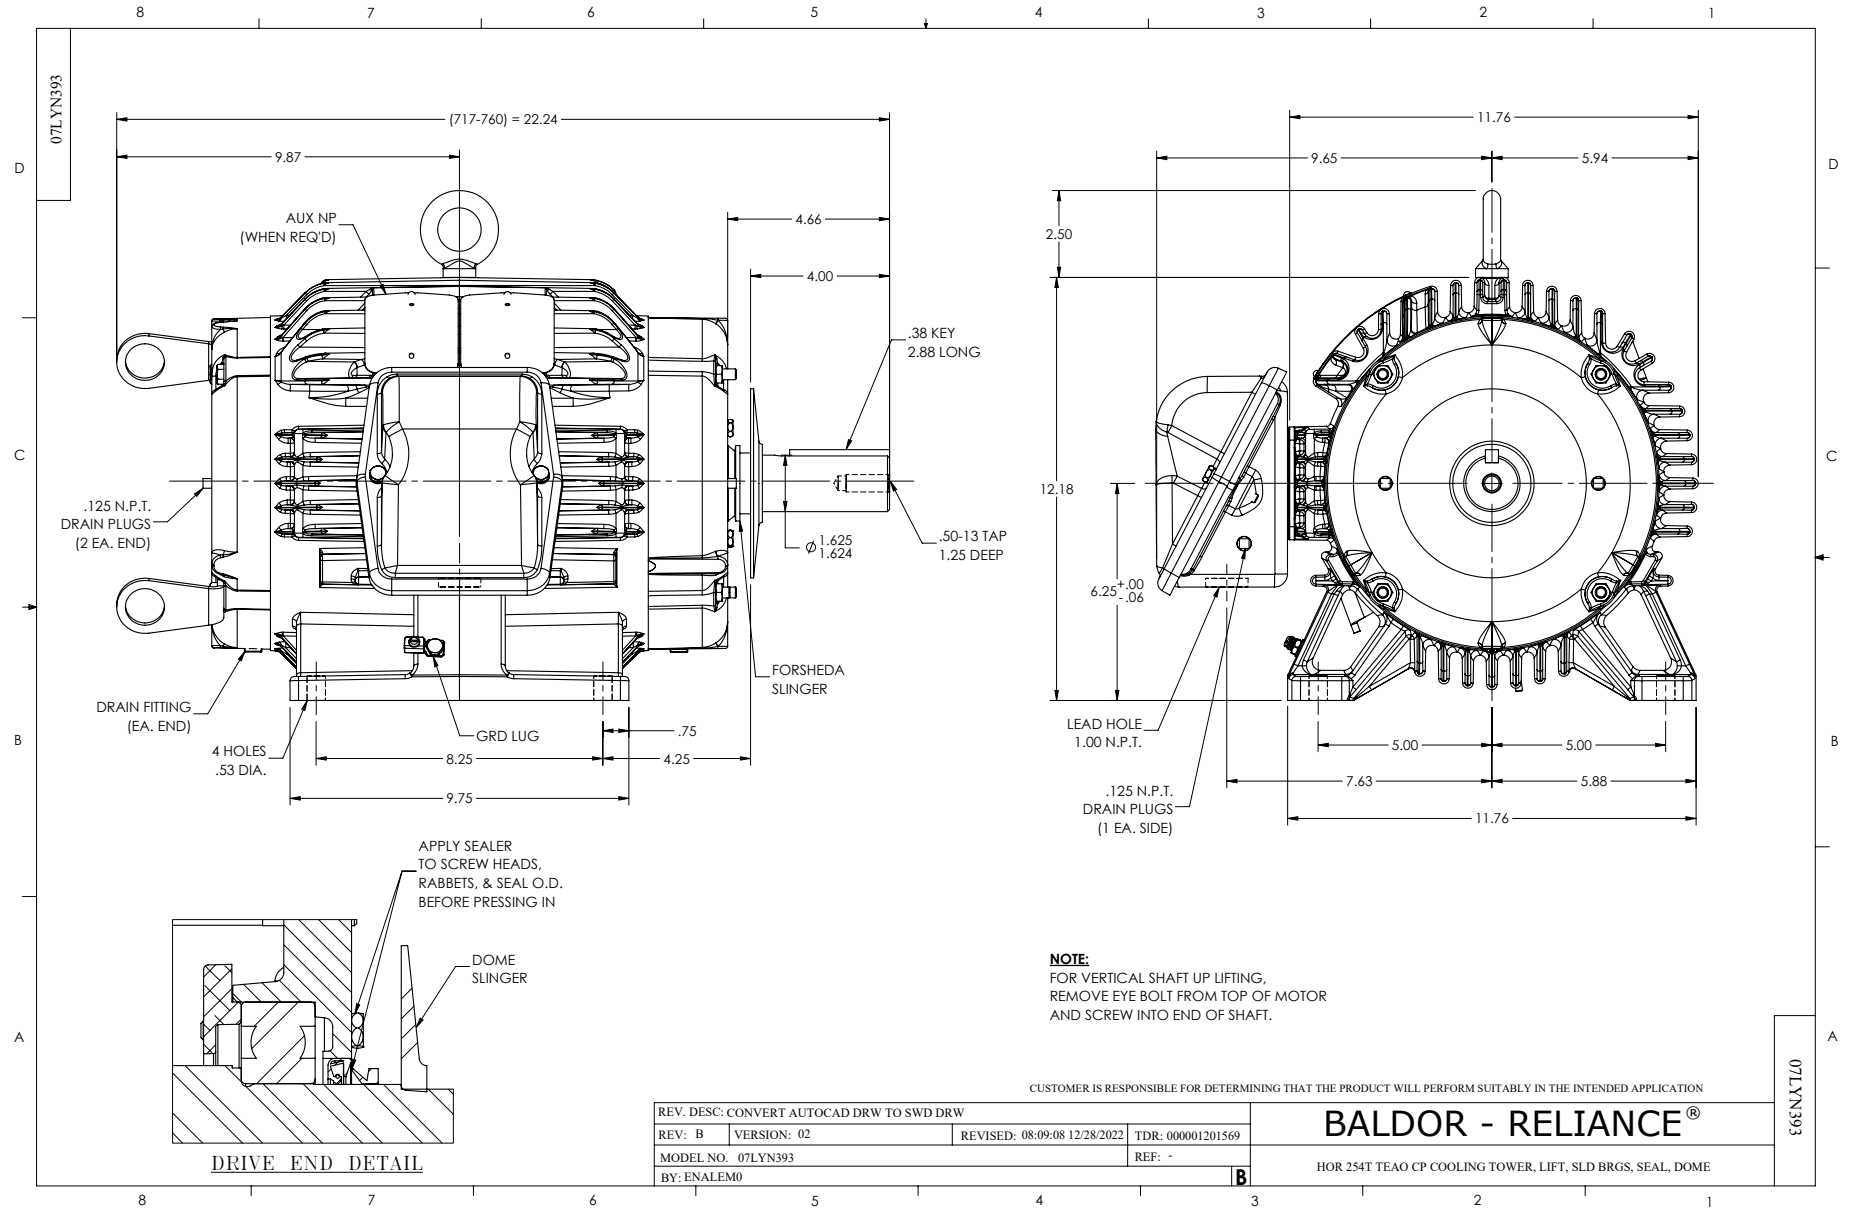

CD0005



- NOTES:
- 1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
 - 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
S00000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005