

ABB BALDOR RELIANCE III

Customer information packet

CWDM3537-H

0.5HP, 3450RPM, 3PH, 60HZ, 56HC, TENV, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TENV
Frame	56HC
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 208.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	.900 A @ 460.0 V 1.800 A @ 230.0 V 1.900 A @ 208.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	70.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	0.9 a

Part Detail

Revision	C
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	35WG1706
Layout	35LY-000-259
Eff. date	09-11-2023
CD Diagram	CD0005
Poles	02
Leads	9#18
Proprietary	False
Created date	06-26-2019

Insulation Class	F
Inverter Code	Inverter Ready
IP Rating	IP55
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3512M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	12.06 IN
Power Factor	76
Product Family	Wash Down
Pulley Face Code	C-Face
Rodent Screen	None
Service Factor	1.25
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	3450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1496L									
CAT.NO.	CWDMM3537-H								
SPEC.	35-0000-0229								
HP	.5								
VOLTS	208-230/460								
AMP	1.9-1.8/.9								
RPM	3450								
FRAME	56HC		HZ	60			PH	3	
SER.F.	1.25	CODE	L	DES	B	CLASS	F		
NEMA-NOM-EFF	70	PF	76						
RATING	40C AMB-CONT								
CC									
DE	6205		ODE	6203					
ENCL	TENV	SN							
	SFA 2.1-2/1								

Parts List

Part number	Description	Quantity
SA377265	SA 35-0000-0229	1.000 ea
RA367180	RA 35-0000-0229	1.000 ea
LB1164	LABEL,WARNING AND DRAIN	1.000 ea
LC0005	CONN.DIA.,TY M,9-LD,DUAL VOLT,REVERSING	1.000 ea
NP1496L	SS WD UL CC	1.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
HA3100S07	THRUBOLT 10-32 X 8.375 SS	4.000 ea
35EP3122D00W	MASTER ODE,203 BRG,.125NPT DRNS(WHITE)	1.000 ea
HW5100A03	WAVY WASHER (W1543-017)	1.000 ea
HW4072A01	BLACK DRAIN PLUG FOR .125 NPT	3.000 ea
35CB3008A01G	SPL CONDUIT BOX, MACHINED GRAY	1.000 ea
35GS1039	05 MOLDED GASKET W/LIP, 1.12 LEAD HOLE,	1.000 ea
35EP3307R20W	CUSTOM DE,205 BRG,1.623SH,.125NPT DRNS .	1.000 ea
HW4600B49	SEAL 0.938 X 1.624 X 0.250 SINGLE LIP DB	1.000 ea
HW4600B46	V-RING SLINGER 0.875 X 1.420 X .24 VITON	1.000 ea
12XN1032S20	10-32 X 1-1/4 HEX M.S. , STAINLESS STEEL	2.000 ea
HA5027A02	HA4054 T-DRAIN X2 BAGGED WITH LABEL	1.000 ea
HW4072A01	BLACK DRAIN PLUG FOR .125 NPT	3.000 ea
51XB1016A08	10-16X 1/2HXWSSLD SERTYB	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
35CB4522	35 LIPPED CB LID PRIMED	1.000 ea
35GS1030A02	35 GS FOR CB LID - WHITE NEOPRENE	1.000 ea
59XW0832S07	TAPTITE II,HEX WSHR UNSLTD SER,410 S.S.,	4.000 ea
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 ea
MG1025W01	WILKOFAS, 781.01, SIGNAL WHITE #9003	0.022 ga
MJ5001A27	32220KN GRAY SEALER *MIN BUY 4 QTS=1GAL	0.001 qt
35PA1066	PKG GRP, PRINT PK1008A07	1.000 ea
HW2502D13	SS KEY, 3/16 SQ X 1.375	1.000 ea
HA7000A04	KEY RETAINER 0.625 DIA SHAFTS	1.000 ea

MG1025Z02	ACTIVATOR WILKOFAST 060.02HF 55 GALLON	0.022 ga
FE-0000001	ZRTG FE ASSEMBLY	1.000 ea

AC Induction Motor Performance Data

Record # 37295

Typical performance - not guaranteed values

Winding: 35WG1706-R003				Type: 3512M		Enclosure: TENV	
Nameplate Data				460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		.5		Full Load Torque		0.752 LB-FT	
Volts		208-230/460		Start Configuration		direct on line	
Full Load Amps		1.9-1.8/.9		Breakdown Torque		3.06 LB-FT	
R.P.M.		3450		Pull-up Torque		2.14 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		2.44 LB-FT	
NEMA Design Code		B	KVA Code	Starting Current		5.71 A	
Service Factor (S.F.)		1.25		No-load Current		0.525 A	
NEMA Nom. Eff.		70	Power Factor	Line-line Res. @ 25°C		37.8 Ω	
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		63°C	
S.F. Amps		2.1-2/1		Temp. Rise @ S.F. Load		74°C	
				Locked-rotor Power Factor		72.9	
				Rotor inertia		0.0332 LB-FT2	

Load Characteristics 460 V, 60 Hz, 0.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	48	62	72	79	83	86	83
Efficiency	43.9	59.7	67.1	70.5	72.1	72.5	72.4
Speed	3557	3530	3502	3471	3438	3402	3450
Line amperes	0.565	0.636	0.727	0.839	0.961	1.1	0.96


ABB Motors and Mechanical Inc.

WINDING # 35WG1706


Typical performance - not guaranteed values.

0.5 HP 3 PH 60 HZ 3450 RPM 460 V 3512M

TORQUES (LB-FT): PO=3.06 PU=2.14 LR=2.44 LRA=5.71

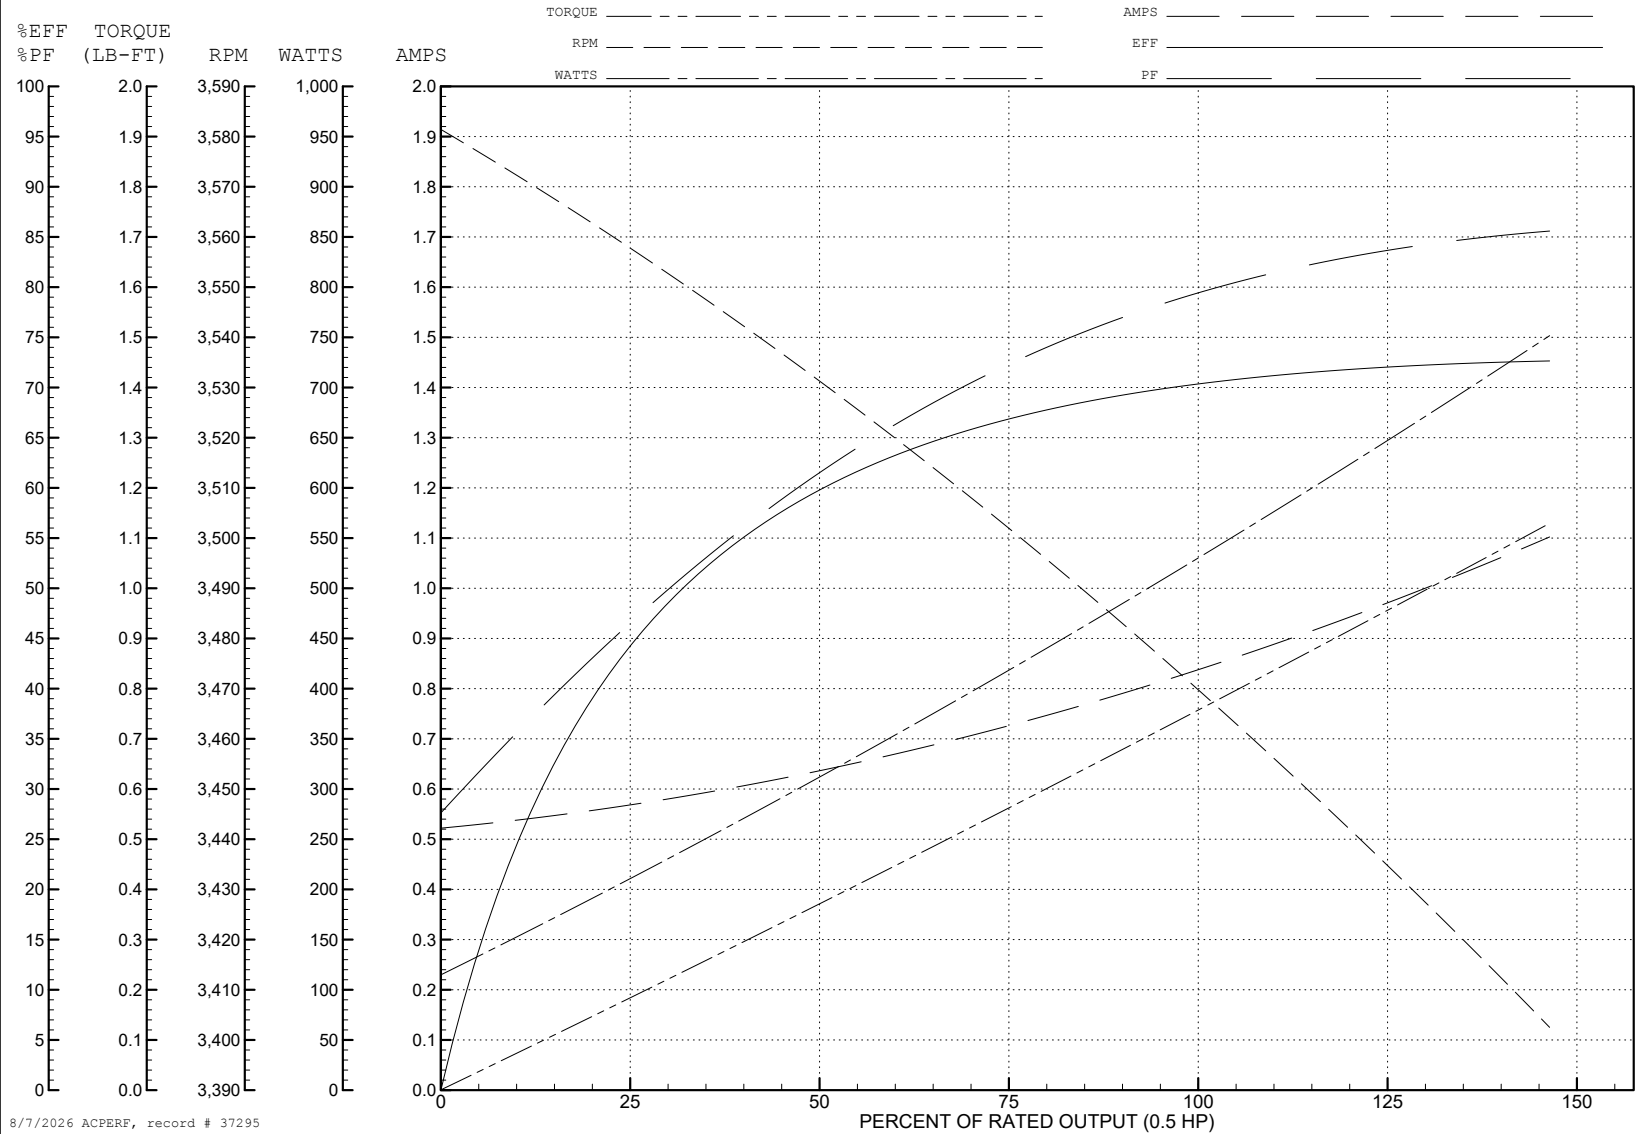

35LY-000-259

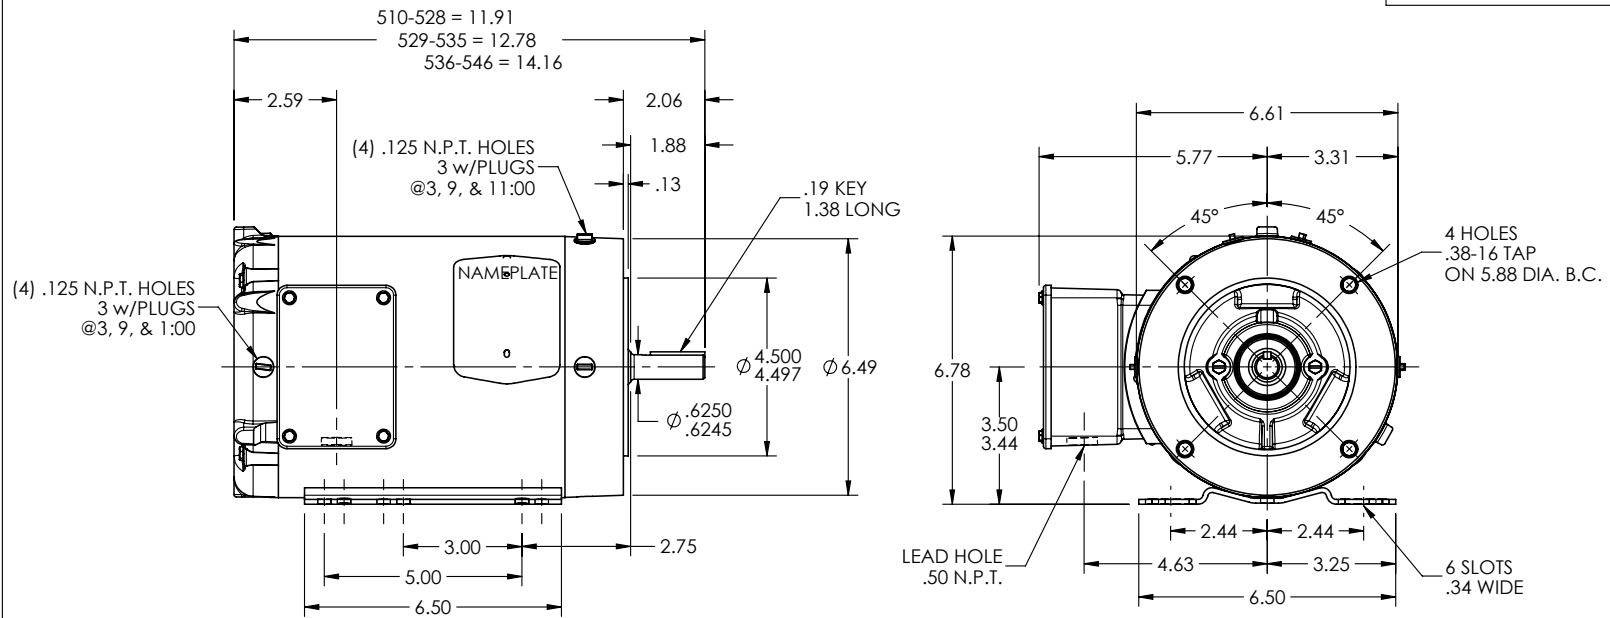

PULLEY END DETAIL

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: UPDATE MATE ERRORS IN 3D MODEL

REV: A	VERSION: 01	REVISED: 08:47:50 04/21/2022	TDR: 000001188385
--------	-------------	------------------------------	-------------------

657-000-1155

MODEL NO. 35LY-000-259

BY: USBUFRA

REF: -

BALDOR - RELIANCE®

STD HORZ 56HC TENV 35M WD

35LY-000-259

