

ABB BALDOR RELIANCE III

Customer information packet

D1803R

3HP, 1750RPM, DC, 189ATY, DPG,

Specifications

Armature Voltage	180 V
Base Speed	1750 rpm
Enclosure	DP
Frame	DC0189ATY
Output Power	3.000 HP
Agency Approvals	CCSA US
Ambient Temperature	40 °C
Armature Current	14.8 a
Drip Cover	No Drip Cover
Duty Rating	CONT
Feedback Device	NO FEEDBACK
Field Winding Type	STR. SHUNT
Frame Prefix	DC
Heater Indicator	No Heater
Insulation Class	F
Lifting Lugs	Standard Lifting Lugs
Motor Standards	NEMA
Mounting Arrangement	F3
Overall Length	21.19 IN
Service Factor	1.00
Shaft Diameter	0.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Slinger Indicator	No Slinger
Thermal Device - Bearing	None

Part Detail

Revision	-
Type	DC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	G4605A
Layout	609980-503
Eff. date	01-06-2020
CD Diagram	406770-007
Poles	00
Leads	
Proprietary	False
Created date	12-27-2019

Nameplate

000613006HP									
CAT.NO.			SPEC NO.	T18S1118					
FR	DC0189ATY	HP	3			DUTY	CONT		
ENCL.	DP	RPM	1750			S.F.	1.0		
ENCL MOD			VOLTS	180		INSUL		F	
MAX SAFE SPEED	04500	AMPS	14.80		AMB.		40		
FIELD DATA		SER.NO.							
WINDING	STR. SHUNT		POWER CODE		2/2-230-60-0				
VOLTS	200		D.E. BRG.		30BC02JPP30A				
MAX AMPS @ 25 C	1.90/.95		O.D.E. BRG.		30BC02JPG30A				
HOT AMPS	.73		MIN. AMB.		0		TYPE		TR
BRUSH:419904050A									
SPLASHPROOF									

Parts List

Part number	Description	Quantity
SA377462	SA T18S1118	1.000 ea
AA018265	AA T18S1118	1.000 ea
000692000FP	NP, WARNING LIFT INSTRUCTIONS	1.000 ea
000692000FS	WARNING LABEL	1.000 ea
033775004EA	DRSCR #6-1/4 304 S.S.	8.000 ea
000613006HP	NAMEPLATE - RPM III D-C MOTOR W/CSA LOGO	1.000 ea
422908009B	SLVNG EXTRA SLVG LENGT	28.000 ea
609844002A	BALANCE RING	1.000 ea
036000012HB	HHCS M6X12MM LONG PLATED	1.000 ea
036010010GB	M5-.8 X 10 HXWHD SCREW	2.000 ea
610470003R	BRASY METRIC	1.000 ea
419904050A	BRUSH N	2.000 ea
801758061A	BRKT,ODE,DC180	1.000 ea
801758057AA	BRKT,DE,DC180	1.000 ea
004824015A	GREASE POLYREX EM	0.100 lb
036000050HB	MHHCS M6X50MM PLATED	2.000 ea
400638001C	WSHR	1.000 ea
036500009AB	METRIC NUTM8-1.25PLTD-360	4.000 ea
036500009AB	METRIC NUTM8-1.25PLTD-360	4.000 ea
609830005J	TBOLT METRC RP 609830-	4.000 ea
415000103A	T/LUG #14AWG-#4AWG W/HOLE FOR .250 BOLT	1.000 ea
033520003JE	SHWHS	1.000 ea
417733003A	GASKT	1.000 ea
418018074A	GROUND LABEL G100 METRIC 160 D.C.	1.000 ea
036620008AB	M6 METRIC EXT LOCKWASHER	1.000 ea
032018004CK	HHCS 3/8-16X1/2L PLATED	4.000 ea
422919190	HHCVR KIT,DC180,DE, LOUVERED	1.000 ea
422919190	HHCVR KIT,DC180,DE, LOUVERED	1.000 ea
422919190	HHCVR KIT,DC180,DE, LOUVERED	1.000 ea
422919199	CVRKT FE	1.000 ea
422919201	HHCVR KIT,DC180,ODE,LOUVERED	1.000 ea

422919201	HHCVR KIT,DC180,ODE,LOUVERED	1.000 ea
422919201	HHCVR KIT,DC180,ODE,LOUVERED	1.000 ea
706310300A	COND BOX	1.000 ea
06CB3500	BALDOR CONDUIT BOX LID	1.000 ea
06GS1001	BALDOR CONDUIT BOX GASKET	1.000 ea
033518006LB	HWHMS, .75IN 1/4-20	2.000 ea
036000010HB	MHHCS M6-1.0X10L PLATED	4.000 ea
406770007	C/D TAG	1.000 ea
706305020A	GUARD, SHAFT	1.000 ea
034180010CA	KEY 3/16X3X16X1-1/4 L	1.000 ea
000640000P	TAG WINDING THERMOST	1.000 ea
000692000NF	NP 2POLE METRIC LABEL	1.000 ea
004824007K	SPECIAL PAINT	0.100 ea

ABB BALDOR RELIANCE III

CUSTOMER INFORMATION
DC189AT
PACKET
3.00HP

D1803R


BASE SPEED
1750

WINDING TYPE
STRAIGHT SHUNT

S.F. 1.0	ENCL. DPG	AMB⁰C/INSUL 40/F	DUTY CONT	POWER CODE/FORM FACTOR 2/2 230-60-0	TYPE TR	WK²(LB-FT²) .6247
--------------------	---------------------	---------------------------------------	---------------------	---	-------------------	---

COOLING AIR(CFM/IN H₂O) -/-	θ (sec) .394	R (hot) .120	T_E .00769	T_M .0474	BASIC RPM 1950	MAX CONT RPM 2300	WINDER RPM -	MAX. SAFE 4500
--	------------------------	------------------------	--------------------------------	-------------------------------	--------------------------	-----------------------------	------------------------	--------------------------

WINDING	VOLTS	RESISTANCE		CURRENT		INDUCTANCE	TURNS PER COIL
		25 ⁰ C	HOT	25 ⁰ C	HOT		
ARM CIRCUIT	180	.875	1.17	-	14.8	10.0 mH	-
SERIES S1-S2	-	-	-	-	-	-	-
SHUNT F1-F2	200	211	268	.946	.745	36.3 H	2000

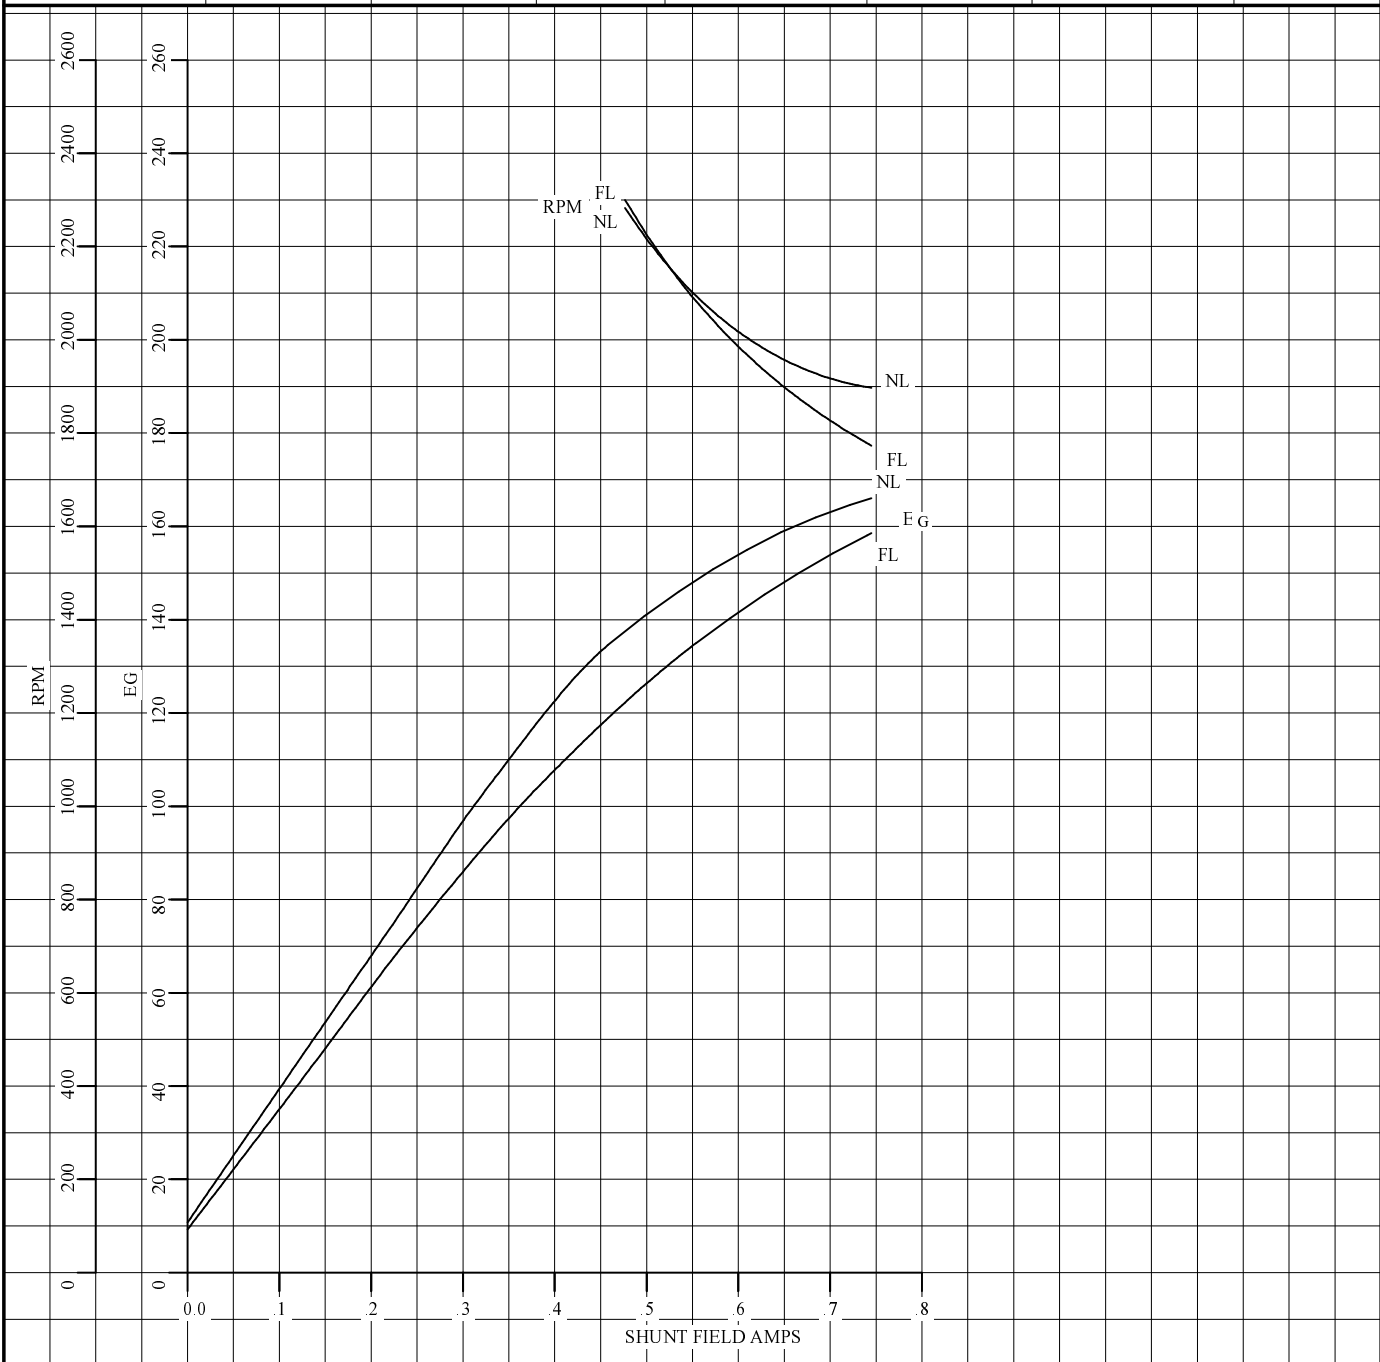

REMARKS: TYPICAL DATA SPEED REGULATOR REQUIRED FOR STABILITY
CURVES VALID FOR NAMEPLATE SPEED RANGE ONLY



DR. BY J. MARTIN
CK. BY J. MARTIN
APP. BY T. EVON
DATE 7/11/88

**D-C
APPLICATION
DATA**

SG4605A

ISSUE DATE 7/11/88

REL S.O.	FRAME	RATING	RPM	ARM. VOLTS	ARM. AMPS
	DC189AT	3.00HP	1750	180	14.8
WINDING TYPE		S.F.	ENCL.	AMB °C/INSUL	DUTY
STRAIGHT SHUNT		1.0	DPG	40/F	CONT
POWER CODE	TYPE	WK ² (LB-FT ²)	HOT ARM.CIR.RES.	FLD. AMPS@25 °C	HOT FIELD RES
2/2 230-60-0	TR	.6247	1.17	.946	268
ARM. CIR. IND. (mh)	FIELD IND. (H)	COOLING AIR(CFM/IN H ² 0)		TURNS PER COIL SHUNT/SERIES	TEST DATE
10.0	36.3	-/-		2000/.00000	-
LOAD PERFORMANCE					
LOAD	AMPERES	TORQUE IN LB.-FT.	OUTPUT IN HP	RPM	% EFFICIENCY
NO LOAD	.60	0	0	1881	0
1/4	3.7	2.06	.722	1844	62.9
2/4	7.4	4.47	1.54	1810	72.5
3/4	11	6.81	2.31	1783	74.4
4/4	15	8.99	3.03	1770	74.1
O.L.	22	12.9	4.32	1763	71.7
RPM VS. FIELD AMPS					
FIELD AMPS	RPM N.L.	RPM F.L.	Eg N.L. @ BASE SPEED	Eg F.L. @ BASE SPEED	
.745	1881	1770	166	158	
.678	1932	1856	162	151	
.610	2002	1965	157	143	
.543	2114	2107	148	133	
.476	2282	2300	138	122	
REMARKS: TYPICAL DATA MAXIMUM SAFE SPEED = 4500 RPM SPEED REGULATOR REQUIRED FOR STABILITY					
		DR. BY J. MARTIN CK. BY J. MARTIN APP. BY T. EVON DATE 7/11/88		D-C MOTOR PERFORMANCE DATA DG4605A ISSUE DATE 7/11/88	

HP/KW 3.00HP

ENCL. DPG

WK2(LB-FT2) .6247

FLD.AMPS@25 °C .946

RPM 1750

AMB °C INSL. 40/F

HOT ARM. CIR. RES. 1.17

FIELD IND (H) 36.3

ARM. VOLTS 180

ARM. AMPS 14.8

ARM. CIRCUIT IND(mh) 10.0

CFM/IN. H₂O -/-

WDG. TYPE STRAIGHT SHUNT


FIELD VOLTS 200

HOT FIELD RES. 268

TEST S.O. -

POWER CODE 2/2 230-60-0

TEST DATE -

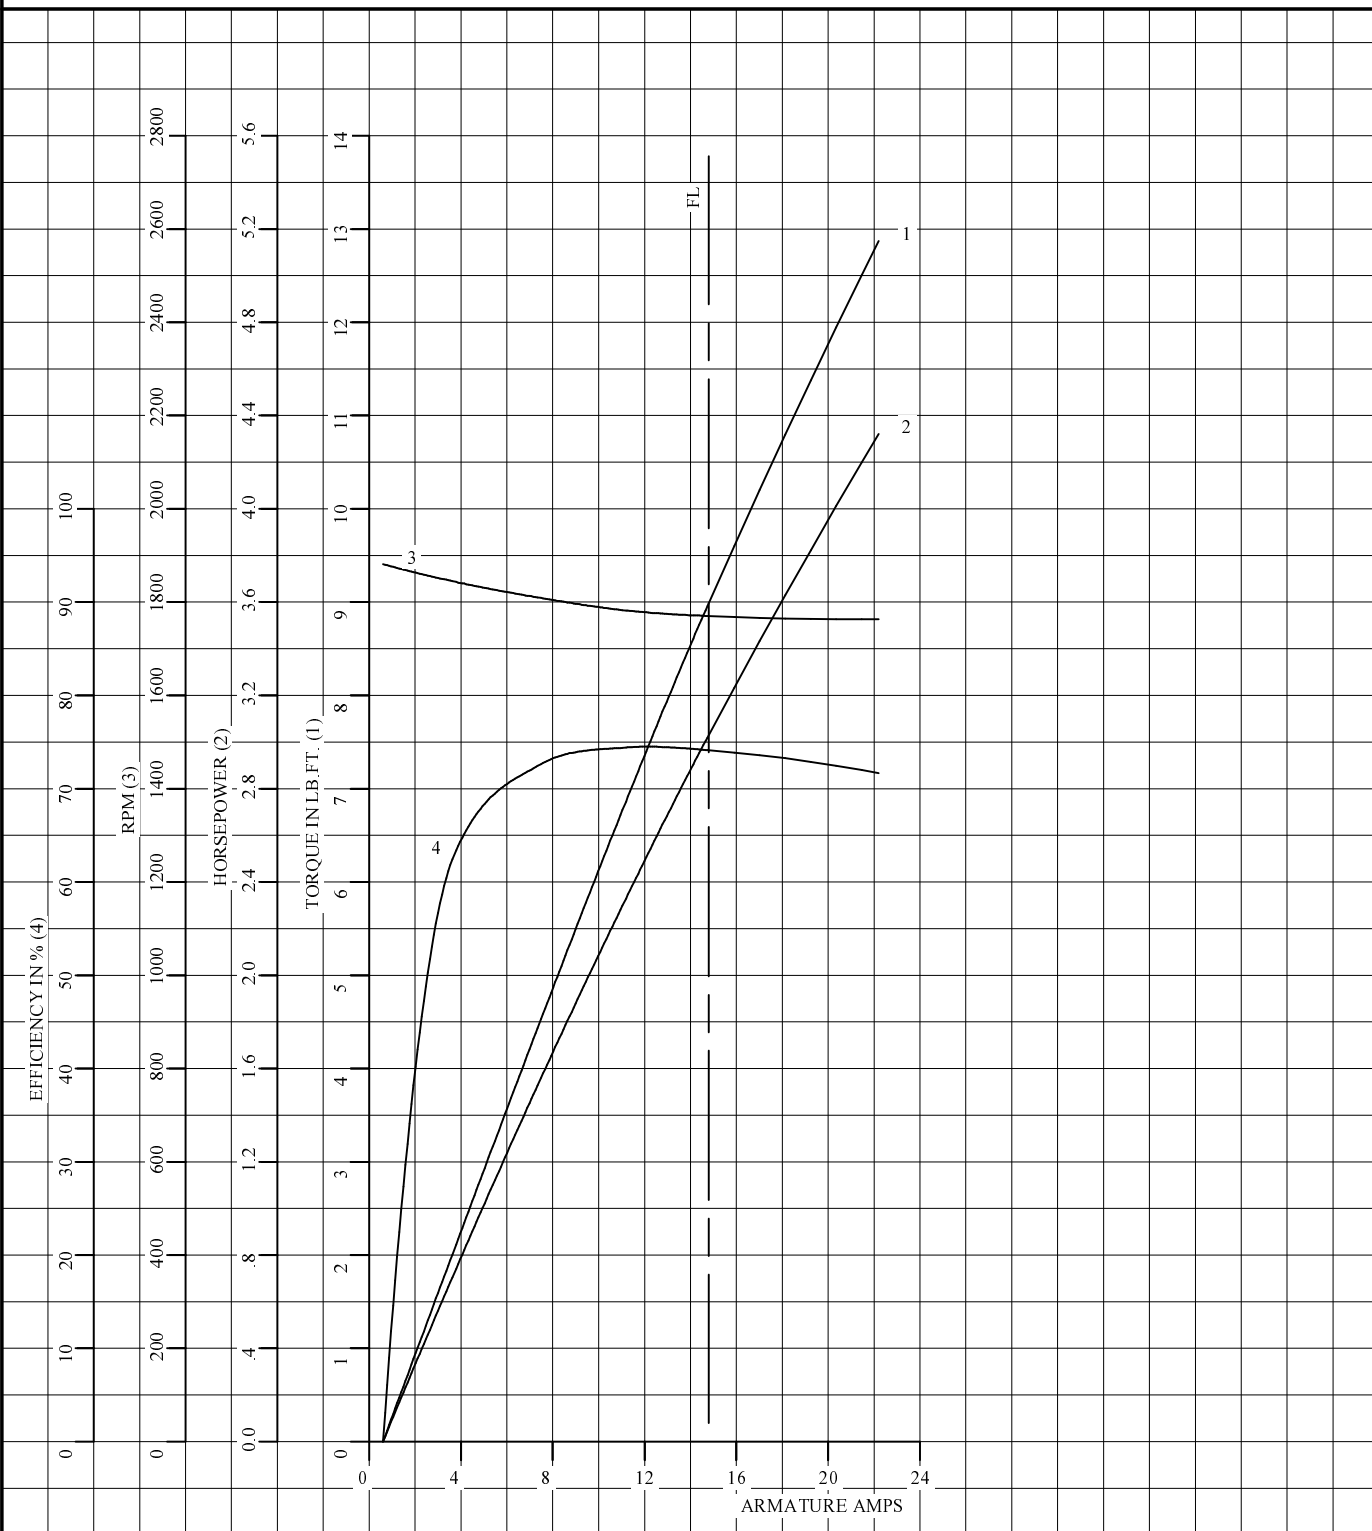

REMARKS: TYPICAL DATA SPEED REGULATOR REQUIRED FOR STABILITY



DR. BY J. MARTIN
CK. BY J. MARTIN
APP. BY T. EVON
DATE 7/11/88

**D-C
PERFORMANCE
CURVES**

PG4605A

ISSUE DATE 7/11/88

