

ABB BALDOR RELIANCE III

Customer information packet

D2040P-BV

0328AT, 40HP, 1750RPM, 240, 300, DPBV, F1

Specifications

Armature Voltage	240 V
Base Speed	1750 rpm
Enclosure	DPFG
Field Voltage	300 V
Frame	328AT
Output Power	40.000 HP
Agency Approvals	CSA
Ambient Temperature	40 °C
Armature Current	138.0 a
Drip Cover	No Drip Cover
Duty Rating	CONT
Feedback Device	NO FEEDBACK
Field Winding Type	STR. SHUNT
Heater Indicator	No Heater
Insulation Class	F
Lifting Lugs	Standard Lifting Lugs
Motor Standards	NEMA
Mounting Arrangement	F1
Overall Length	34.63 IN
Service Factor	1.00
Shaft Diameter	2.125 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Slinger Indicator	No Slinger
Thermal Device - Bearing	None

Part Detail

Revision	A
Type	DC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	K0080A B
Layout	1336-4
Eff. date	10-03-2023
CD Diagram	15209
Poles	00
Leads	
Proprietary	False
Created date	12-18-2019

Nameplate

NP1734									
CAT.NO.	D2040P-BV		MODEL	T32S8003					
HP	40	RPM	1750/2100		FRAME		0328AT		
ARM V	240		ARM A	138.00		WOUND	STR. SHUNT		
FLD V	150/300		FLD A	2.64-2.00/1.32-1.00					
CONN			OHMS	145.6		CL	F		
ENCL	DPBV		DUTY	CONT		MX AMB	40		
P CODE	D		CTSR			SER.F.	1.0		
S/N			E/S	K0080A B					
	-								
O.D.E. BRG.	6210	D.E. BRG.	6211	BRUSH		28610-1		QTY	4


Parts List

Part number	Description	Quantity
SA377217	SA T32S8003	1.000 ea
AA018234	AA T32S8003	1.000 ea
036170004DA	DRSCW METRIC NAMEPLATE	4.000 ea
NP1734	NPL,BALDOR DC MTR ALUMINUM	1.000 ea
150247	CAUTION LABEL,BLWR WHEEL ROTATION,MYLAR	1.000 ea
032018004BK	HHCS 5/16-18X1/2 PLATED	2.000 ea
15094	DISHED LOCKWASHER .332 ID, .865 OD	2.000 ea
BP5228R02	BRUSH ROCKER ASSY, FR 28/32 2 BR/STUD	1.000 ea
28610-1SP	BRUSH,280/320FR	4.000 ea
32031-5	CE BRKT MACH FR 320 FOR LOCKED C.E	1.000 ea
32029-10	BRKT,STD. LOCKED C/E 320AT	1.000 ea
004824015A	GREASE POLYREX EM	0.400 lb
032130010DA	1/2-13 X 1.25 HSHCS	4.000 ea
032018040DK	HHCS 1/2-13X5L PLATED	4.000 ea
HW4500A17	317400 ALEMITE GREASE RELIEF	1.000 ea
400638001G	WAVEN (Customer number 43699)	1.000 ea
HW4500A17	317400 ALEMITE GREASE RELIEF	1.000 ea
035000001A	ALFTG 1/8" 1610-BL	1.000 ea
035000001A	ALFTG 1/8" 1610-BL	1.000 ea
032130016BA	HSHCS OUTER CAP LE	4.000 ea
150449-31	GRD STUD ARG .312DIA STUD	1.000 ea
15024-7	28021-2/BOX FR. 280/3201/8" THK.,MUELL	1.000 ea
15024-7	28021-2/BOX FR. 280/3201/8" THK.,MUELL	1.000 ea
XY3118A12	5/16-18 HEX NUT DIRECTIONAL SERRATION	4.000 ea
10156-1	BLOWER WHEEL	1.000 ea
10159-1	HOUSING ASSY,LM6 BLOWER, ALUMINUM,MACH C	1.000 ea
10XN2520K12	1/4-20 X.75 GRD 5	5.000 ea
35V523S921G1	1HP,3450//2850RPM,3PH,60//50HZ,56CZ,3516	1.000 ea
91XN3816A16	3/8-16X1 HEX SOC CNTRSK	4.000 ea
XY2520A12	1/4-20 HEX NUT, DIRECTIONAL SERRATIONS	5.000 ea
032018006DK	HHCS 1/2-13X3/4 PLATED	4.000 ea

10052-2	LM6 BLOWER ADAPTER,FR 320	1.000 ea
15115	TERM BOX HOLE COVER FRAME 280 & 320	1.000 ea
032018004BK	HHCS 5/16-18X1/2 PLATED	4.000 ea
032018004AK	HHCS 1/4-20X1/2 PLATED	4.000 ea
32020-2	GASKET COVER COM END FRAME 320 SERIES	3.000 ea
32020-1	GASKET, COVER, FAN END	3.000 ea
032018004AK	HHCS 1/4-20X1/2 PLATED	3.000 ea
FLT6320	LM6 FILTER KIT ASSEMBLY	1.000 ea
032018004BK	HHCS 5/16-18X1/2 PLATED	28.000 ea
32046-1	VENT COVER FRAME 32 SERIES	3.000 ea
32019-2	ACCESS COVER FRAME 32 SERIES	1.000 ea
32019-2	ACCESS COVER FRAME 32 SERIES	2.000 ea
15599-37	DRIVE SCR,#10 X.37 TYPE UPLATED STEEL	7.000 ea
32023-1	LOUVERED SMILE COVER, FR 320	1.000 ea
15024-6	TERM.BOX BASE FR-320, DUREX P/N:3SP	1.000 ea
15024-4	TERM.BOX CVR. FR-28,32,36DUREX P/N:D618	1.000 ea
15024-5	GASKET, T.BOX COVER	1.000 ea
032018004AK	HHCS 1/4-20X1/2 PLATED	2.000 ea
032018008BK	HHCS 5/16-18X1L PLATED	4.000 ea
15209	LABEL CONNECTIONS & TERMINAL MARKIN	1.000 ea
15021-1	ACCESSORY FACE COVER FRAME 180-500 SERIE	1.000 ea
034180025GA	KEY,DE	1.000 ea
004824007BTW	SPECIAL PAINT4824-3BVZ	0.100 ea

Accessories

Part number	Description	Multiplier
94EP5000A02	C-FACE CONVERSION KIT FOR STOCK MTR,FR 3	

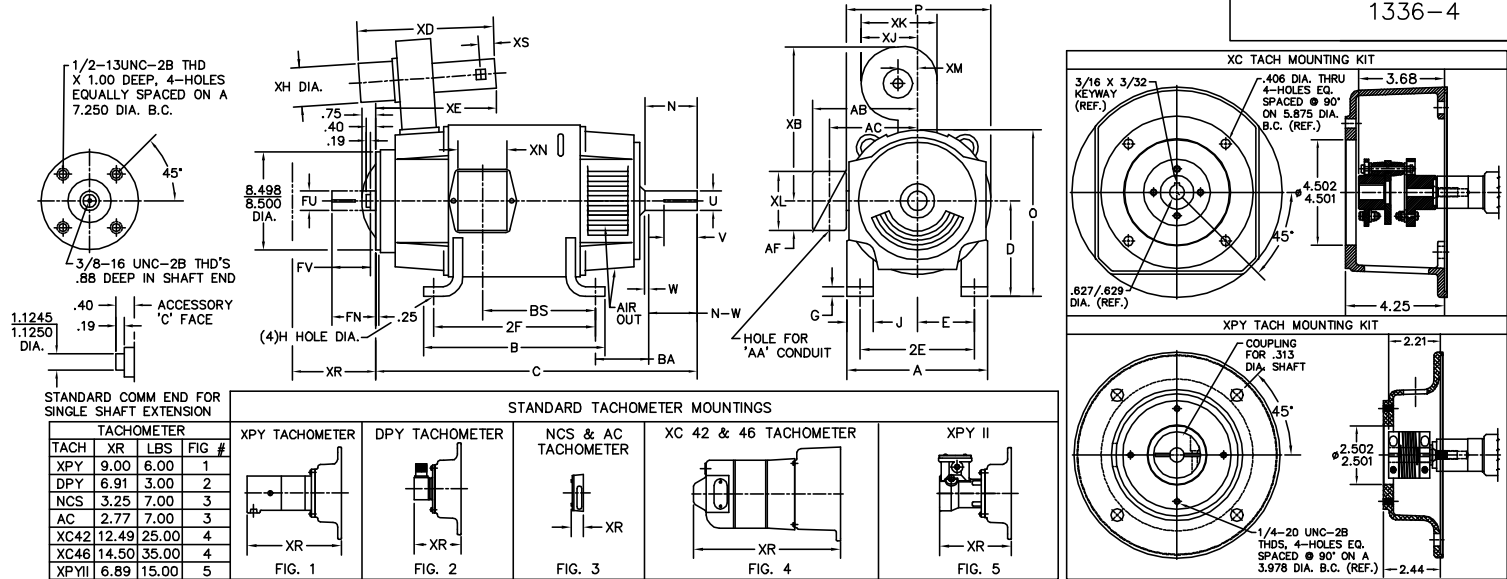

STANDARD COMM END FOR SINGLE SHAFT EXTENSION

TACH	XR	LBS	FIG #
XPY	9.00	6.00	1
DPY	6.91	3.00	2
NCS	3.25	7.00	3
AC	2.77	7.00	3
XC42	12.49	25.00	4
XC46	14.50	35.00	4
XPYII	6.89	15.00	5

STANDARD TACHOMETER MOUNTINGS

XPY TACHOMETER	DPY TACHOMETER	NCS & AC TACHOMETER	XC 42 & 46 TACHOMETER	XPY II
FIG. 1	FIG. 2	FIG. 3	FIG. 4	FIG. 5

FRAME	FOOT MOUNTING				D.E. SHAFT EXTENSION				DRIVE KEY				ACC SHAFT EXTENSION				ACC KEY				FRAME			
	BA	E	2F	G	H	J	N	N-W	U	V	W	KEY-SQ.	KEY-LONG	FN	FU	FV	KEY-SQ.	KEY-LONG	A	B	C	D	O	P
327AT	5.25	6.25	14.00	.81	.656	3.00	4.40	4.25	2.125	4.00 ³	.15	.500	3.12	3.94	1.875	3.69	.500	2.81	15.88	15.75	32.75	8.00 ²	15.94	15.88
328AT	5.25	6.25	16.00	.81	.656	3.00	4.40	4.25	2.125	4.00 ³	.15	.500	3.12	3.94	1.875	3.69	.500	2.81	15.88	17.75	34.63	8.00 ²	15.94	15.88
329AT	5.25	6.25	18.00	.81	.656	3.00	4.40	4.25	2.125	4.00 ³	.15	.500	3.12	3.94	1.875	3.69	.500	2.81	15.88	19.75	36.63	8.00 ²	15.94	15.88
365AT	5.88	7.00	12.25	.81	.813	3.25	4.94	4.75	2.375	4.50 ³	.19	.625	3.50	4.62	2.125	4.37	.500	3.13	17.75	13.75	32.94	9.00 ²	17.94	17.88
366AT	5.88	7.00	14.00	.81	.813	3.25	4.94	4.75	2.375	4.50 ³	.19	.625	3.50	4.62	2.125	4.37	.500	3.13	17.75	15.50	35.13	9.00 ²	17.94	17.88
368AT	5.88	7.00	18.00	.81	.813	3.25	4.94	4.75	2.375	4.50 ³	.19	.625	3.50	4.62	2.125	4.37	.500	3.13	17.75	19.50	38.13	9.00 ²	17.94	17.88
3610AT	5.88	7.00	22.00	.81	.813	3.25	4.94	4.75	2.375	4.50 ³	.19	.625	3.50	4.62	2.125	4.37	.500	3.13	17.75	23.50	41.45	9.00 ²	17.94	17.88
3612AT	5.88	7.00	28.00	.81	.813	3.25	4.94	4.75	2.375	4.50 ³	.19	.625	3.50	4.62	2.125	4.37	.500	3.13	17.75	29.50	45.56	9.00 ²	17.94	17.88

	CONDUIT BOX							BLOWER									ARM APPROX. WK ² LBS./FT. ²	APPROXIMATE WEIGHT
FRAME	AA	AB	AC	AF	BS	XL	XN	SIZE	XB	XD	XE	XH	XM	XJ	XK	XS		
327AT	2	12.94	10.32	5.00	11.81	7.88	5.25	LM6	19.13	26.38	17.38	10.25	4.19	9.44	11.50	3.75	8.45	738 ⁵
328AT	2	12.94	10.32	5.00	13.68	7.88	5.25	LM6	19.13	26.38	17.38	10.25	4.19	9.44	11.50	3.75	9.67	813 ⁵
329AT	2	12.94	10.32	5.00	15.68	7.88	5.25	LM6	19.13	26.38	17.38	10.25	4.19	9.44	11.50	3.75	10.97	922 ⁵
365AT	2 1/2	14.06	11.38	5.00	9.06	7.88	5.25	LM6	18.88	26.38	18.44	10.25	5.69	10.95	11.50	3.75	15.61	803 ⁵
366AT	2 1/2	14.06	11.38	5.00	11.25	7.88	5.25	LM6	18.88	26.38	18.44	10.25	5.69	10.95	11.50	3.75	18.27	913 ⁵
368AT	2 1/2	14.06	11.38	5.00	14.25	7.88	5.25	LM6	18.88	26.38	18.44	10.25	5.69	10.95	11.50	3.75	22.21	1073 ⁵
3610AT	3	16.86	13.09	6.53	18.25	11.63	7.76	LM9	25.50	28.31	20.94	10.75	5.50	12.38	15.25	3.75	28.00	1109 ⁵
3612AT	3	16.86	13.09	6.53	24.25	11.63	7.76	LM9	25.50	28.31	20.94	10.75	5.50	12.38	15.25	3.75	31.60	1145 ⁵

- 1) SHAFT DIAMETERS TO 1.500 TOLERANCE +.0000 - .0005
SHAFT DIAMETERS ABOVE 1.500 TOLERANCE +.0000 - .0010
SHAFT DIAMETERS TO 1.625 RUNOUT .002 T.I.R. MAX.
SHAFT DIAMETERS ABOVE 1.625 RUNOUT .003 T.I.R. MAX.
- 2) 'D' DIMENSION TOLERANCE +.000 - .080
- 3) 'V' DIMENSION IS MAX. HUB LENGTH ON SHAFT
- 4) CONDUIT BOX CAN BE ROTATED IN 90° STEPS ON ITS OWN AXIS.
- 5) TOTAL WEIGHT OF MOTOR AND BLOWER LESS TACH WEIGHT.
- 6) ALL DIMENSIONS NOT NOTED ARE NOMINAL DIMENSIONS CONSULT FACTORY FOR TOLERANCES.


FOR F1 OR F2 CONDUIT BOX
LOCATION SEE SALES ORDER

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.


REV. DESC:	REV. "D" DIM TO +.000 - .060 ONLY
REV. LTR:	G
VERSION:	01
TDR:	000000752448
FILE:	\RGG\00019\490
REVISED:	01:55:17 06/19/2012
MTL:	-
BY:	RGGNAS

BALDOR

DIM SHEET: 327-3612AT,DPBV,W/TACH
SH 1 of 1

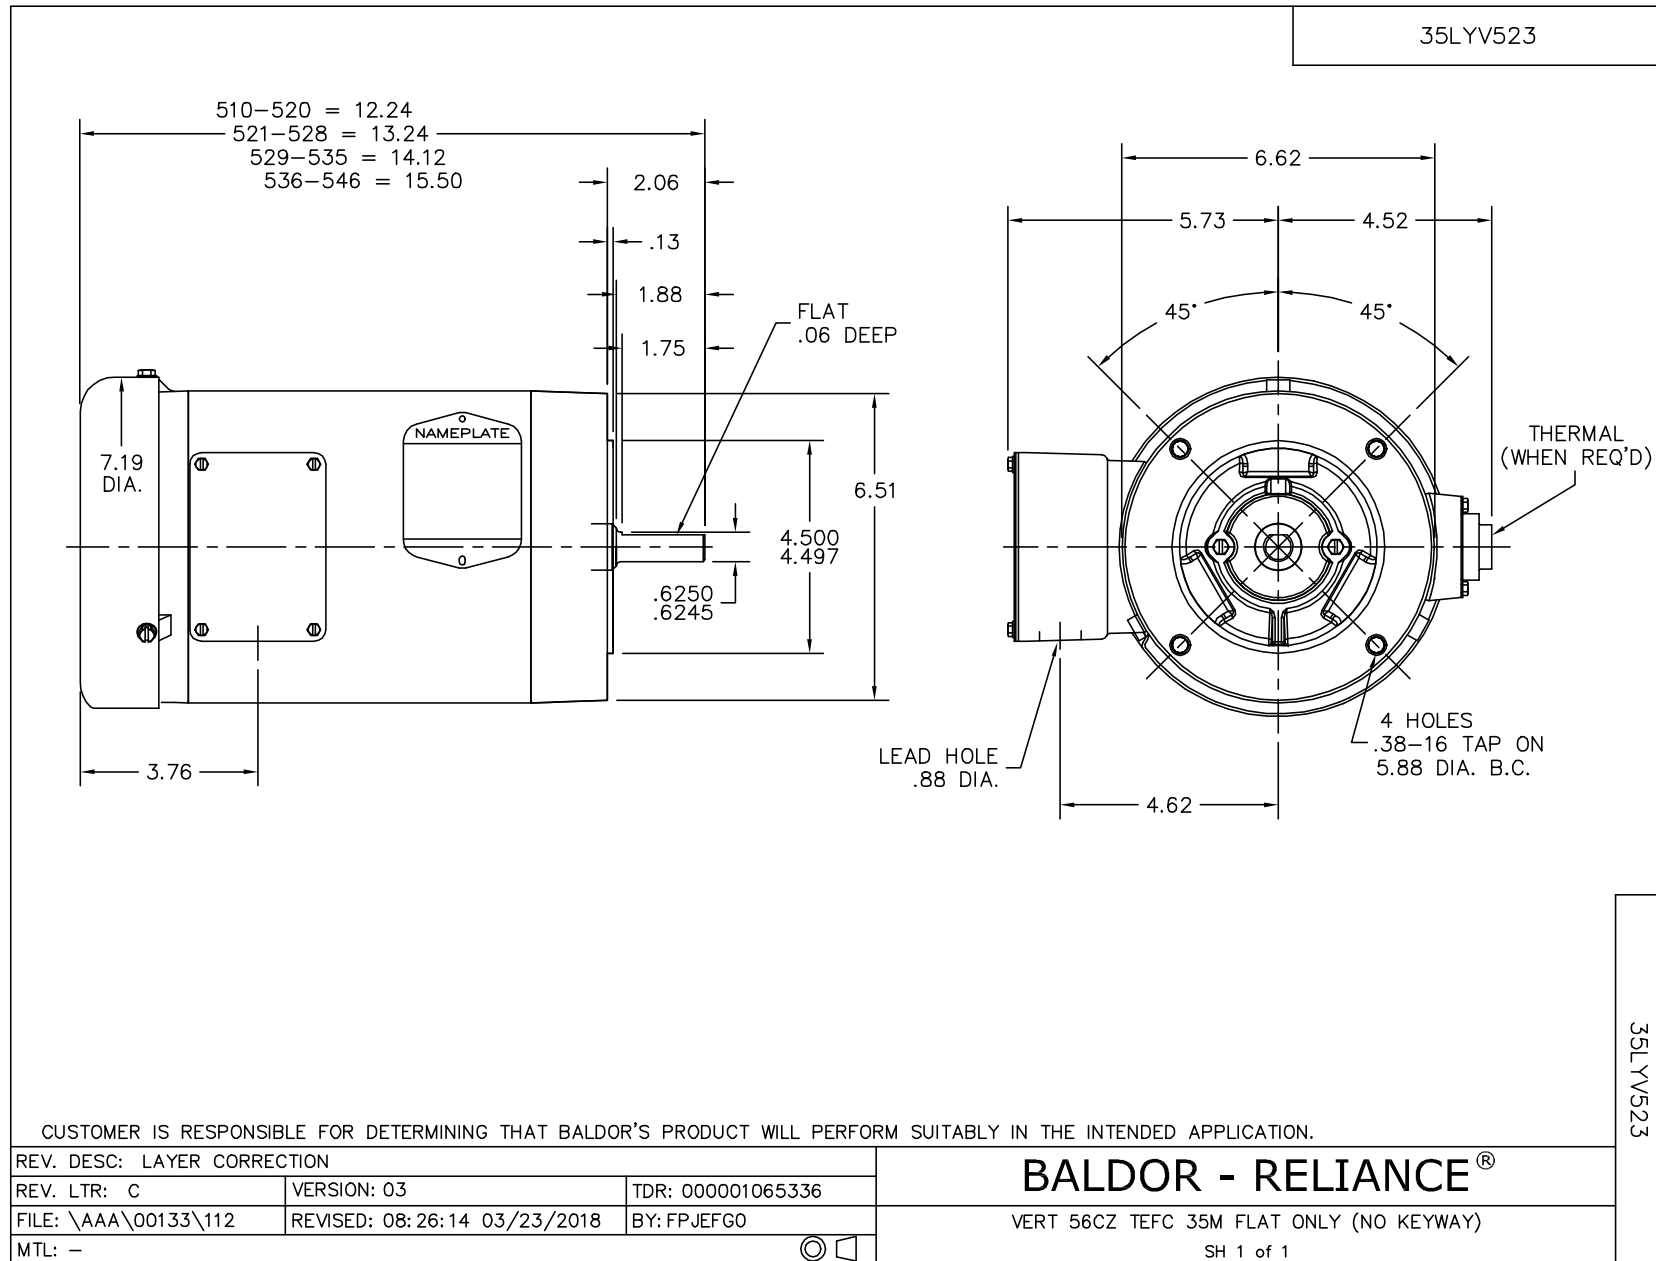

15209

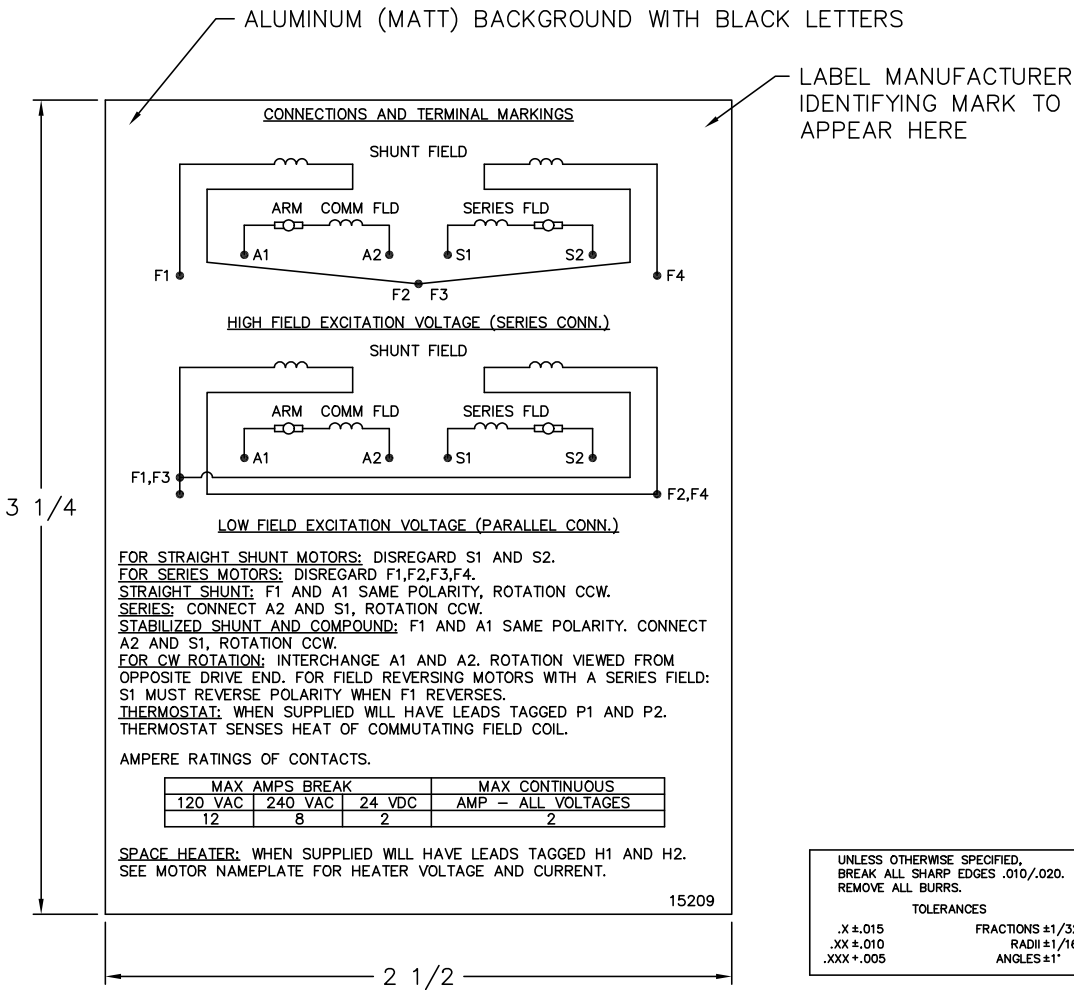

NOTE:
MATERIAL .005 MINIMUM FULL HARD ALUMINUM DULL FINISH.
TEMP. RANGE -20°C TO +125°C MAXIMUM.
FOR INDOOR AND OUTDOOR MOUNTING BACK.
METAL, PRESSURE SENSITIVE BACK. MUST MEET CSA STANDARD.
THE CSA IDENTIFYING MARK OF THE LABEL MANUFACTURER MUST APPEAR IN THE UPPER RIGHT HAND CORNER AS INDICATED.

MATL: NOTED			
REV:	G	CHANGE ALL "NAMEPLATE" TEXT TO "LABEL"	
60Z91		SCALE: —	BY: BKW
		FILE: CHB00002485	REVISD: 02/19/97
		TDR: 0115147	

BALDOR ELECTRIC Co.

LABEL, CONNECTIONS AND TERMINAL MARKINGS DC

15209