

ABB BALDOR RELIANCE III

Customer information packet D2520R

20 1750/2300 LC2512ATZ TEFC 240V

Specifications

Enclosure	TEFC
Frame	LC2512ATZ
Frame Material	Exposed Laminations
Output Power	20.000 HP
Agency Approvals	CCSA US
Ambient Temperature	40 °C
Bearing Grease Type	Polyrex EM (-20F +300F)
Drip Cover	No Drip Cover
Feedback Device	CUST SUPPLIED/PROVISIONS
Field Winding Type	STAB SHUNT
Frame Prefix	LC
Heater Indicator	No Heater
Lifting Lugs	Standard Lifting Lugs
Motor Standards	NEMA
Mounting Arrangement	F1
Overall Length	38.94 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Slinger Indicator	No Slinger

Part Detail

Revision	-
Type	DC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	G6315A B
Layout	609951-013
Eff. date	04-13-2015
CD Diagram	406770-001
Poles	00
Leads	
Proprietary	False
Created date	04-10-2015

Nameplate

000613006HP									
CAT.NO.		SPEC NO.	T25S0303						
FR	LC 2512ATZ	HP	20	DUTY		CONT			
ENCL.	TEFC	RPM	1750/ 2300		S.F.	1.0			
ENCL MOD		VOLTS	240		INSUL		F		
MAX SAFE SPEED	4500	AMPS	71.00		AMB.	40			
FIELD DATA		SER.NO.							
WINDING	STAB SHUNT	POWER CODE		C					
VOLTS	150	D.E. BRG.		60BC03J30X					
MAX AMPS @ 25 C	4.14	O.D.E. BRG.		50BC02J30X					
HOT AMPS	2.83/ 2.01	MIN. AMB.		0		TYPE		TR	
BRUSH:419904051AC									

Parts List


Part number	Description	Quantity
SA297103	SA T25S0303	1.000 ea
AA016148	AA T25S0303	1.000 ea
000613006HP	NAMEPLATE - RPM III D-C MOTOR W/CSA LOGO	1.000 ea
000692000FP	NP, WARNING LIFT INSTRUCTIONS	1.000 ea
000692000FS	WARNING LABEL	1.000 ea
033775004EA	DRSCR #6-1/4 304 S.S.	6.000 ea
406770001	C/D TAG (STAB SHUNT)	1.000 ea
036600008AB	MFWSH M6 PLATED	1.000 ea
036000012HB	HHCS M6X12MM LONG PLATED	4.000 ea
036000020KB	MHHCS M10-1.5X20MM PLTD.	4.000 ea
036501008AB	KPNUT M6-1.0 ZINCPLTED	8.000 ea
036610010AB	MHSLW M10 PLATED	4.000 ea
419904-51AC	BRUSH EXTRUDER DUTY C	4.000 ea
419905003A	FLAT WASHER ROCKER RPM III RGG	4.000 ea
419905008A	HARDWARE	8.000 ea
706364051RCA	BRHLD METRIC SPRING CHG.	4.000 ea
706372011RE	ROCKR METRIC	1.000 ea
034530018AB	P/NIP 1/8X2-1/4L PLATED	1.000 ea
034630001AJ	1/8" PIPE COUPLING	1.000 ea
034693001AB	PPLG - G508- use 034692001AB	1.000 ea
034693001AB	PPLG - G508- use 034692001AB	1.000 ea
035000001A	ALFTG 1/8" 1610-BL	1.000 ea
035000001A	ALFTG 1/8" 1610-BL	1.000 ea
036000055JB	HHCS,DE CAP	2.000 ea
036100070KA	METRIC HSHCS	3.000 ea
036500010AB	METRIC NUT M10-1.5PLTD400	4.000 ea
036500010AB	METRIC NUT M10-1.5PLTD400	4.000 ea
406055001B	GRFTG	1.000 ea
418150003A	GREASE FITTING CAP	2.000 ea
419912001A	WWSHR	1.000 ea
609830005T	TBOLT METRIC RP609830-	4.000 ea

801926054A	BRKT,ODE,C250	1.000 ea
801927052A	BRKT,DE,C250	1.000 ea
032018004AK	HHCS 1/4-20X1/2 PLATED	4.000 ea
032018004CK	HHCS 3/8-16X1/2L PLATED	5.000 ea
032018012DK	HHCS 1/2-13X1-1/2 PLTD. 032018012DR	4.000 ea
034001012AB	WSHR 1/4" PLATED	4.000 ea
034017016AB	LCKW 1/2" PLATED	4.000 ea
034180012FA	KEY 3/8X3/8X1-1/2 L - 360	1.000 ea
036000012HB	HHCS M6X12MM LONG PLATED	2.000 ea
036000045JB	M8-1.25 X 45MM HXHCS	4.000 ea
036620009AB	M8 EXTERNAL LK WASHER	1.000 ea
065564000B	GASK 250-280	1.000 ea
075453000A	CBOXC, PAINTED 250-280	1.000 ea
078548001T	FAN 250	1.000 ea
412043012B	400G BUTTON	1.000 ea
415072001B	CLAMP	1.000 ea
417733001D	GASKT	2.000 ea
418010006A	CAST,MPLATE,180-280,EX1,7BY	1.000 ea
418018074A	GROUND LABEL G100 METRIC 160 D.C.	1.000 ea
422919027	HHCVR KIT, C250, ODE, SOLID	1.000 ea
422919027	HHCVR KIT, C250, ODE, SOLID	1.000 ea
422919027	HHCVR KIT, C250, ODE, SOLID	1.000 ea
422919038	HHCVR KIT C250 ODE SOLID	1.000 ea
422919038	HHCVR KIT C250 ODE SOLID	1.000 ea
422919038	HHCVR KIT C250 ODE SOLID	1.000 ea
603909003A	GRILL, FAN	1.000 ea
706320005A	CONDUIT BOX	1.000 ea
706365002A	FNGRL R&H	1.000 ea
801954001A	FNCVR 801954-1WCA	1.000 ea
000640000P	TAG WINDING THERMOST	1.000 ea
000692000NG	LABEL ;NP 4POLE METRIC LABEL	1.000 ea
034180024GA	KEY 1/2X1/2X3 L	1.000 ea

ENCLOSURE: TOTALLY ENCLOSED
MOUNTING: FOOT
METHOD OF DRIVE: COUPLED OR BELTED

COOLING: FAN COOLED
ACCESSORIES: PROVISION FOR
TACHOMETER MOUNTING
ONLY WHEN SPECIFIED

FRAMES SC2113ATZ THRU LC2812ATZ

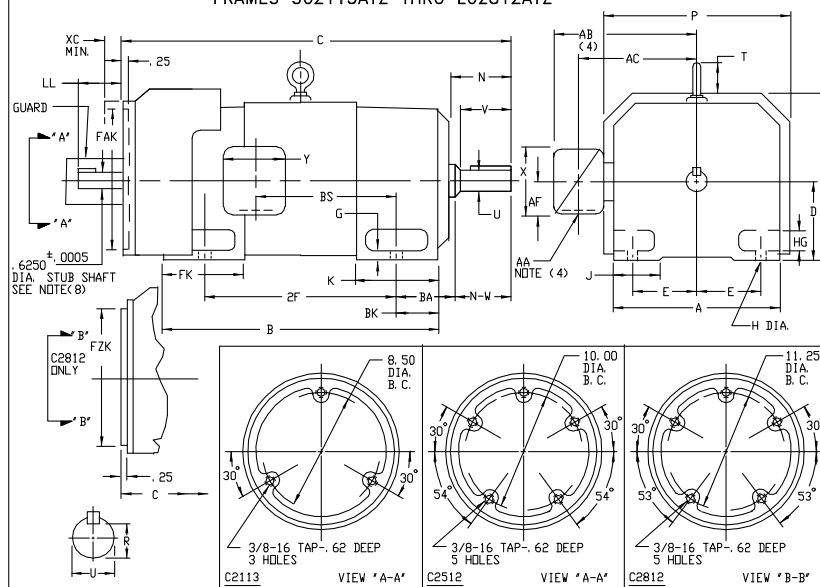

DIMENSIONS ARE IN INCHES

FRAME	A	B(1)	E	G	H	HG	J	D	P	T	BA	K	FK	BK	FAK(6)	FZK(7)	XC
SC2113ATZ-LC2113ATZ	10.25	5.25	4.25	.44	.44	1.38	1.75	11.62	12.75	1.38	3.50	5.19	6.81	2.38	9.750	N/A	1.25
SC2812ATZ-LC2812ATZ	12.31	6.25	5.00	.50	.56	1.62	2.00	13.62	14.75	1.94	4.25	6.06	8.00	3.38	11.250	N/A	1.25
MC2812ATZ-LC2812ATZ	13.78	7.00	5.00	.62	.56	1.88	2.75	15.06	16.12	2.31	4.75	6.75	9.19	3.50	N/A	12.500	1.25

FRAME	C	B	BS	2 ^θ	DRIVE END SHOT AND KEY							WT. HS
					N	N	U	K	R	S	LGTH	
SG2113A72	32.9	22.90	11.38	18.00	4.0	7.51	8.75	3.50	.591	590	2.50	355
SG2113A73	33.44	23.73	12.62	18.00	4.0	7.51	8.75	3.50	.591	590	2.50	380
LC2113A73	35.06	25.38	14.25	18.00	4.0	7.51	8.75	3.50	.591	590	2.50	410
SG2151A73	35.94	26.56	15.36	20.00	4.0	5.4	25.125	4.00	.845	500	3.00	355
MC2151A73	37.44	26.56	15.36	20.00	4.0	5.4	25.125	4.00	.845	500	3.00	390
LC2151A77	38.94	28.06	16.50	20.00	4.0	5.4	25.125	4.00	.845	500	3.00	630
MC8181A77	41.62	29.94	14.25	25.00	5.0	7.75	3.75	4.50	.621	625	3.50	835
LC8181A77	43.68	29.94	16.50	25.00	5.0	7.75	3.75	4.50	.621	625	3.50	900

- (1) "B" DIMENSION WILL NOT BE EXCEEDED. SHIMS UP TO .03 INCHES IN THICKNESS ARE USUALLY REQUIRED FOR COUPLED OR GEARED MACHINES.
- (2) "E" VARIES-----, 0.000 - 0.001
- (3) "F" VARIES-----, 0.000 - 0.015
- (4) "G" VARIES-----, 0.000 - 0.015
- (5) "H" VARIES-----, 0.000 - 0.015
- (6) "I" VARIES-----, 0.000 - 0.015
- (7) "J" VARIES-----, 0.000 - 0.015
- (8) "K" VARIES-----, 0.000 - 0.015
- (9) "L" VARIES-----, 0.000 - 0.015
- (10) "M" VARIES-----, 0.000 - 0.015
- (11) "N" VARIES-----, 0.000 - 0.015
- (12) "O" VARIES-----, 0.000 - 0.015
- (13) "P" VARIES-----, 0.000 - 0.015
- (14) "Q" VARIES-----, 0.000 - 0.015
- (15) "R" VARIES-----, 0.000 - 0.015
- (16) "S" VARIES-----, 0.000 - 0.015
- (17) "T" VARIES-----, 0.000 - 0.015
- (18) "U" VARIES-----, 0.000 - 0.015
- (19) "V" VARIES-----, 0.000 - 0.015
- (20) "W" VARIES-----, 0.000 - 0.015
- (21) "X" VARIES-----, 0.000 - 0.015
- (22) "Y" VARIES-----, 0.000 - 0.015
- (23) "Z" VARIES-----, 0.000 - 0.015
- (24) "AA" VARIES-----, 0.000 - 0.015
- (25) "AB" VARIES-----, 0.000 - 0.015
- (26) "AC" VARIES-----, 0.000 - 0.015
- (27) "AD" VARIES-----, 0.000 - 0.015
- (28) "AE" VARIES-----, 0.000 - 0.015
- (29) "AF" VARIES-----, 0.000 - 0.015
- (30) "AG" VARIES-----, 0.000 - 0.015
- (31) "AH" VARIES-----, 0.000 - 0.015
- (32) "AI" VARIES-----, 0.000 - 0.015
- (33) "AJ" VARIES-----, 0.000 - 0.015
- (34) "AK" VARIES-----, 0.000 - 0.015
- (35) "AL" VARIES-----, 0.000 - 0.015
- (36) "AM" VARIES-----, 0.000 - 0.015
- (37) "AN" VARIES-----, 0.000 - 0.015
- (38) "AO" VARIES-----, 0.000 - 0.015
- (39) "AP" VARIES-----, 0.000 - 0.015
- (40) "AQ" VARIES-----, 0.000 - 0.015
- (41) "AR" VARIES-----, 0.000 - 0.015
- (42) "AS" VARIES-----, 0.000 - 0.015
- (43) "AT" VARIES-----, 0.000 - 0.015
- (44) "AU" VARIES-----, 0.000 - 0.015
- (45) "AV" VARIES-----, 0.000 - 0.015
- (46) "AW" VARIES-----, 0.000 - 0.015
- (47) "AX" VARIES-----, 0.000 - 0.015
- (48) "AY" VARIES-----, 0.000 - 0.015
- (49) "AZ" VARIES-----, 0.000 - 0.015
- (50) "BA" VARIES-----, 0.000 - 0.015
- (51) "BB" VARIES-----, 0.000 - 0.015
- (52) "BC" VARIES-----, 0.000 - 0.015
- (53) "BD" VARIES-----, 0.000 - 0.015
- (54) "BE" VARIES-----, 0.000 - 0.015
- (55) "BF" VARIES-----, 0.000 - 0.015
- (56) "BG" VARIES-----, 0.000 - 0.015
- (57) "BH" VARIES-----, 0.000 - 0.015
- (58) "BI" VARIES-----, 0.000 - 0.015
- (59) "BJ" VARIES-----, 0.000 - 0.015
- (60) "BK" VARIES-----, 0.000 - 0.015
- (61) "BL" VARIES-----, 0.000 - 0.015
- (62) "BM" VARIES-----, 0.000 - 0.015
- (63) "BN" VARIES-----, 0.000 - 0.015
- (64) "BO" VARIES-----, 0.000 - 0.015
- (65) "BP" VARIES-----, 0.000 - 0.015
- (66) "BQ" VARIES-----, 0.000 - 0.015
- (67) "BR" VARIES-----, 0.000 - 0.015
- (68) "BS" VARIES-----, 0.000 - 0.015
- (69) "BT" VARIES-----, 0.000 - 0.015
- (70) "BU" VARIES-----, 0.000 - 0.015
- (71) "BV" VARIES-----, 0.000 - 0.015
- (72) "BW" VARIES-----, 0.000 - 0.015
- (73) "BX" VARIES-----, 0.000 - 0.015
- (74) "BY" VARIES-----, 0.000 - 0.015
- (75) "BZ" VARIES-----, 0.000 - 0.015
- (76) "CA" VARIES-----, 0.000 - 0.015
- (77) "CB" VARIES-----, 0.000 - 0.015
- (78) "CC" VARIES-----, 0.000 - 0.015
- (79) "CD" VARIES-----, 0.000 - 0.015
- (80) "CE" VARIES-----, 0.000 - 0.015
- (81) "CF" VARIES-----, 0.000 - 0.015
- (82) "CG" VARIES-----, 0.000 - 0.015
- (83) "CH" VARIES-----, 0.000 - 0.015
- (84) "CI" VARIES-----, 0.000 - 0.015
- (85) "CJ" VARIES-----, 0.000 - 0.015
- (86) "CK" VARIES-----, 0.000 - 0.015
- (87) "CL" VARIES-----, 0.000 - 0.015
- (88) "CM" VARIES-----, 0.000 - 0.015
- (89) "CN" VARIES-----, 0.000 - 0.015
- (90) "CO" VARIES-----, 0.000 - 0.015
- (91) "CP" VARIES-----, 0.000 - 0.015
- (92) "CQ" VARIES-----, 0.000 - 0.015
- (93) "CR" VARIES-----, 0.000 - 0.015
- (94) "CS" VARIES-----, 0.000 - 0.015
- (95) "CT" VARIES-----, 0.000 - 0.015
- (96) "CU" VARIES-----, 0.000 - 0.015
- (97) "CV" VARIES-----, 0.000 - 0.015
- (98) "CW" VARIES-----, 0.000 - 0.015
- (99) "CX" VARIES-----, 0.000 - 0.015
- (100) "CY" VARIES-----, 0.000 - 0.015
- (101) "CZ" VARIES-----, 0.000 - 0.015
- (102) "DA" VARIES-----, 0.000 - 0.015
- (103) "DB" VARIES-----, 0.000 - 0.015
- (104) "DC" VARIES-----, 0.000 - 0.015
- (105) "DD" VARIES-----, 0.000 - 0.015
- (106) "DE" VARIES-----, 0.000 - 0.015
- (107) "DF" VARIES-----, 0.000 - 0.015
- (108) "DG" VARIES-----, 0.000 - 0.015
- (109) "DH" VARIES-----, 0.000 - 0.015
- (110) "DI" VARIES-----, 0.000 - 0.015
- (111) "DJ" VARIES-----, 0.000 - 0.015
- (112) "DK" VARIES-----, 0.000 - 0.015
- (113) "DL" VARIES-----, 0.000 - 0.015
- (114) "DM" VARIES-----, 0.000 - 0.015
- (115) "DN" VARIES-----, 0.000 - 0.015
- (116) "DO" VARIES-----, 0.000 - 0.015
- (117) "DP" VARIES-----, 0.000 - 0.015
- (118) "DQ" VARIES-----, 0.000 - 0.015
- (119) "DR" VARIES-----, 0.000 - 0.015
- (120) "DS" VARIES-----, 0.000 - 0.015
- (121) "DT" VARIES-----, 0.000 - 0.015
- (122) "DU" VARIES-----, 0.000 - 0.015
- (123) "DV" VARIES-----, 0.000 - 0.015
- (124) "DW" VARIES-----, 0.000 - 0.015
- (125) "DX" VARIES-----, 0.000 - 0.015
- (126) "DY" VARIES-----, 0.000 - 0.015
- (127) "DZ" VARIES-----, 0.000 - 0.015
- (128) "EA" VARIES-----, 0.000 - 0.015
- (129) "EB" VARIES-----, 0.000 - 0.015
- (130) "EC" VARIES-----, 0.000 - 0.015
- (131) "ED" VARIES-----, 0.000 - 0.015
- (132) "EE" VARIES-----, 0.000 - 0.015
- (133) "EF" VARIES-----, 0.000 - 0.015
- (134) "EG" VARIES-----, 0.000 - 0.015
- (135) "EH" VARIES-----, 0.000 - 0.015
- (136) "EI" VARIES-----, 0.000 - 0.015
- (137) "EJ" VARIES-----, 0.000 - 0.015
- (138) "EK" VARIES-----, 0.000 - 0.015
- (139) "EL" VARIES-----, 0.000 - 0.015
- (140) "EM" VARIES-----, 0.000 - 0.015
- (141) "EN" VARIES-----, 0.000 - 0.015
- (142) "EO" VARIES-----, 0.000 - 0.015
- (143) "EP" VARIES-----, 0.000 - 0.015
- (144) "EQ" VARIES-----, 0.000 - 0.015
- <

TACHOMETER	LU
BC-42	
BC-46	
RD-11	
RD-12	4.
RD-51	
RD-61	
RD-62	
RE-210	
M627, M628	
M727, M737	
M738	
DYNAPAR 74S	
RE-045	3. 8
SPY	1. 1
	SEE NOTES (9)


CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: LOADED TO BUS		
REV. LTR: -	VERSION: 00	TDR: 000000577407
FILE: \RGG\00015\557	REVISED: 11:02:01 01/26/2011	BY: CONNAS
MTL: -		

DIMENSION DRAWING, SC2113ATZ - LC2812ATZ, TEFC, FOOT MTG

SH 1 of 1

609959-001

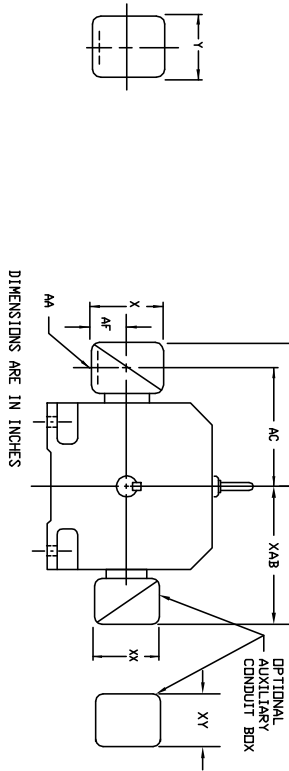INDUSTRIAL DIRECT CURRENT MOTORS
AND GENERATORS - RPM III
TERMINAL BOX DIMENSIONS
STANDARD SIZE AND ONE SIZE LARGER
FRAMES C2113ATZ THRU C2815ATZ

DIMENSIONS ARE IN INCHES

STEEL TERMINAL BOX DIMENSIONS															
FRAME SIZE	MAX. AMPS	STANDARD SIZE					END SIZE LARGER								
		AK(1)	AB	AC	AF	PART NUMBER	AK(1)	AB	AC	AF	PART NUMBER				
C2113ATZ	40	3/4 & 1"	8.97	7.47	1.94	4.38	5.00	705028-1-R	1-1/4 & 1-1/2	10.03	8.03	2.50	5.50	6.12	705029-1-R
C2115ATZ	96	1-1/4 & 1-1/2	10.03	8.03	2.50	5.50	6.12	705029-1-R	2" & 2-1/2	11.16	8.41	3.19	7.00	7.62	705030-1-R
(2)	208	2" & 2-1/2	11.16	8.41	3.19	7.00	7.62	705030-1-R	2" & 2-1/2	11.16	8.41	3.19	7.00	7.62	705030-1-R
C2516ATZ	40	3/4 & 1"	10.03	8.53	1.94	4.38	5.00	705028-1-R	1-1/4 & 1-1/2	11.09	9.09	2.50	5.50	6.12	705029-1-R
C2514ATZ	96	1-1/4 & 1-1/2	11.09	9.09	2.50	5.50	6.12	705029-1-R	2" & 2-1/2	12.22	9.47	3.19	7.00	7.62	705030-1-R
(2)	208	2" & 2-1/2	12.22	9.47	3.19	7.00	7.62	705030-1-R	2" & 2-1/2	12.22	9.47	3.19	7.00	7.62	705030-1-R
C2816ATZ	155	3"	14.03	10.53	4.25	8.44	7.25	74874-R	3"	14.47	11.22	4.25	8.44	7.25	74874-24-R
C2815ATZ	259	4"	15.91	11.84	5.38	10.56	9.00	706308-3-R	5" (4)	16.72	13.47	7.00	12.75	15.00	706355-1-C

CAST IRON TERMINAL BOX DIMENSIONS															
FRAME SIZE	MAX. AMPS	STANDARD SIZE					ONE SIZE LARGER								
		AK(3)	AB	AC	AF	X	Y	NUMBER	AK(3)	AB	AC	AF	X	Y	NUMBER
C2113ATZ	18	3/4	10.03	8.03	2.50	5.00	5.75	705028-2-S	1"	10.03	8.03	2.50	5.00	5.75	705028-2-T
C2115ATZ	40	1"	10.03	8.03	2.50	5.00	5.75	705028-2-T	1-1/2	10.97	8.53	3.00	6.00	7.00	705029-2-R
C2115ATZ	96	1-1/2	10.97	8.53	3.00	6.00	7.00	705029-2-R	2"	10.97	8.53	3.00	6.00	7.00	705029-2-S
C2514ATZ	208	2"	10.97	8.53	3.00	6.00	7.00	705029-2-S	2-1/2	12.66	8.91	3.62	7.88	9.25	705030-2-R
C2516ATZ	18	3/4	11.09	9.09	2.50	5.00	5.75	705028-2-S	1"	11.09	9.09	2.50	5.00	5.75	705028-2-T
C2514ATZ	40	1"	11.09	9.09	2.50	5.00	5.75	705028-2-T	1-1/2	12.03	9.59	3.00	6.00	7.00	705029-2-R
C2514ATZ	96	1-1/2	12.03	9.59	3.00	6.00	7.00	705029-2-R	2"	12.03	9.59	3.00	6.00	7.00	705029-2-S
C2816ATZ	208	2"	12.03	9.59	3.00	6.00	7.00	705029-2-S	2-1/2	13.72	9.97	3.62	7.88	9.25	705030-2-R
C2815ATZ	155	3"	12.78	10.34	3.00	6.00	7.00	75460-T	4"	14.47	10.72	3.62	7.88	9.25	76700-R
C2815ATZ	259	4"	14.47	10.72	3.62	7.88	9.25	76700-R	5"	15.78	11.59	4.12	9.50	10.50	76700-R
C2815ATZ	365	4"	15.78	11.59	4.12	9.50	10.50	76700-R	5" (4)	18.59	13.34	4.75	10.50	11.50	76870-S

CONDUIT BOX DIMENSIONS WITH TERMINAL BOARDS (IEC TYPE BOX)

STANDARD SIZE									
FRAME SIZE	AMPS	AB	AC	AF	X	AA	Y	PART NUMBER	PART NUMBER
C210	100	10.71	8.98	2.72	7.48	--	7.48	706310-56-A	706310-225-R
	200	11.66	9.25	3.35	8.82	--	8.82	706310-56-B	706310-226-R
	100	11.30	9.57	2.72	7.48	--	7.48	706310-56-A	706310-225-R
C250	200	11.85	9.84	3.35	8.82	--	8.82	706310-56-B	706310-226-R
	400	17.48	12.75	6.20	14.39	--	14.39	706310-63-B & 706310-63G	706310-63-B & 706310-63G
	800	17.48	12.75	6.20	14.39	--	14.39	706310-63-B & 706310-63G	706310-63-B & 706310-63G
	200	12.60	10.59	3.76	8.82	--	8.82	706310-56-B	706310-226-R
	400	18.27	13.54	6.20	14.39	--	14.39	706310-63-B & 706310-63G	706310-63-B & 706310-63G
C280	800	18.27	13.54	6.20	14.39	--	14.39	706310-63-B & 706310-63G	706310-63-B & 706310-63G
	1600	18.27	13.54	7.68	15.35	--	15.35	706310-63-C	706310-63-C

OPTIONAL AUXILIARY CONDUIT BOX DIMENSIONS (MAXIMUM)											
FRAME SIZE	XAB	XY	PART NUMBER	FRAME SIZE	XAB	XY	PART NUMBER	FRAME SIZE	XAB	XY	PART NUMBER
C210	7.38	4.25	602007-26-A	C210	10.88	8.00	706310-3-B	C210	10.88	8.00	706310-3-B
C250	8.44	4.25	602007-26-A	C250	11.88	8.00	706310-3-B	C250	11.88	8.00	706310-3-B
C280	9.12	4.25	602007-26-A	C280	12.62	8.00	706310-3-B	C280	12.62	8.00	706310-3-B

(1) MAX CONDUIT
(2) RATES PROVIDED WITH DOUBLE KNUCKLE
(3) MAX PIPE DIA.(4) TERMINAL BOX 76870-S AND 76870-98 EXTENDS BELOW MOTOR FEET
TERMINAL BOX 76870-S AND 76870-98 EXTENDS BELOW MOTOR FEET
DR C-1 MOUNTING IS SPECIFIED. BOX LOCATED ON TOP WHEN SPECIFIED.
FOR "X"/P/TERMINAL BOX DIMENSIONS SEE 609959-2
FOR MILL TYPE TERMINAL BOX DIMENSIONS SEE 609959-3

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: ADD 706310-63G C/BOX TO C250 AND C280 FRAMES	VERSION: 01	TDR: 000000816512
REV. LTR: A		
FILE: \RGG\00021\153		REVISED: 03: 09: 09 09/06/2013
MTL: -		BY: RGGWT

BALDOR

DIMENSION SHEET

SH 1 of 1

609959-001

