

# ABB BALDOR RELIANCE III

---

## Customer information packet D5040R

40HP, 1750RPM, DC, 2512ATZ, DPG,

**Specifications**

|                                 |                         |
|---------------------------------|-------------------------|
| <b>Enclosure</b>                | DP                      |
| <b>Frame</b>                    | LC2512ATZ               |
| <b>Frame Material</b>           | Steel                   |
| <b>Output Power</b>             | 40.000 HP               |
| <b>Agency Approvals</b>         | CCSA US                 |
| <b>Ambient Temperature</b>      | 40 °C                   |
| <b>Bearing Grease Type</b>      | Polyrex EM (-20F +300F) |
| <b>Drip Cover</b>               | No Drip Cover           |
| <b>Feedback Device</b>          | NO FEEDBACK             |
| <b>Field Winding Type</b>       | STAB SHUNT              |
| <b>Frame Prefix</b>             | LC                      |
| <b>Heater Indicator</b>         | No Heater               |
| <b>Lifting Lugs</b>             | Standard Lifting Lugs   |
| <b>Motor Standards</b>          | NEMA                    |
| <b>Mounting Arrangement</b>     | F2                      |
| <b>Overall Length</b>           | 34.69 IN                |
| <b>Shaft Extension Location</b> | Pulley End              |
| <b>Shaft Ground Indicator</b>   | No Shaft Grounding      |
| <b>Shaft Slinger Indicator</b>  | No Slinger              |

**Part Detail**

|                     |            |
|---------------------|------------|
| <b>Revision</b>     | -          |
| <b>Type</b>         | DC         |
| <b>Mech. spec.</b>  |            |
| <b>Base</b>         |            |
| <b>Status</b>       | PRD/A      |
| <b>Elec. spec.</b>  | G6266A A   |
| <b>Layout</b>       | 609950-001 |
| <b>Eff. date</b>    | 04-13-2015 |
| <b>CD Diagram</b>   | 406770-002 |
| <b>Poles</b>        | 00         |
| <b>Leads</b>        |            |
| <b>Proprietary</b>  | False      |
| <b>Created date</b> | 04-09-2015 |

**Nameplate**

| 000613006HP                  |            |             |            |            |       |      |      |   |    |
|------------------------------|------------|-------------|------------|------------|-------|------|------|---|----|
| CAT.NO.                      | D5040R     | SPEC NO.    |            | T25S1323   |       |      |      |   |    |
| FR                           | LC 2512ATZ | HP          | 40         | DUTY       |       | CONT |      |   |    |
| ENCL.                        | DP         | RPM         | 1750/ 2300 |            | S.F.  | 1.0  |      |   |    |
| ENCL MOD                     | GUARDED    | VOLTS       | 500        |            | INSUL |      |      | F |    |
| MAX SAFE SPEED               | 4500       | AMPS        | 68.00      |            | AMB.  |      | 40   |   |    |
| FIELD DATA                   |            | SER.NO.     |            |            |       |      |      |   |    |
| WINDING                      | STAB SHUNT | POWER CODE  |            | C          |       |      |      |   |    |
| VOLTS                        | 300        | D.E. BRG.   |            | 60BC03J30X |       |      |      |   |    |
| MAX AMPS @ 25 C              | 2.40       | O.D.E. BRG. |            | 50BC02J30X |       |      |      |   |    |
| HOT AMPS                     | 1.70/ 1.15 | MIN. AMB.   |            | 0          |       |      | TYPE |   | TR |
| BRUSH:419904051AC; FLD. DATA |            |             |            |            |       |      |      |   |    |
| FOR HIGH VOLTS; FV 150/300   |            |             |            |            |       |      |      |   |    |

**Parts List**

| Part number  | Description                              | Quantity |
|--------------|------------------------------------------|----------|
| SA297097     | SA T25S1323                              | 1.000 ea |
| AA016145     | AA T25S1323                              | 1.000 ea |
| 000613006HP  | NAMEPLATE - RPM III D-C MOTOR W/CSA LOGO | 1.000 ea |
| 000692000FP  | NP, WARNING LIFT INSTRUCTIONS            | 1.000 ea |
| 000692000FS  | WARNING LABEL                            | 1.000 ea |
| 033775004EA  | DRSCR #6-1/4 304 S.S.                    | 6.000 ea |
| 406770002    | C/D TAG STAB SHUNT D.V.                  | 1.000 ea |
| 034182010GA  | KEY 1/2 X 3/8 X 1.25"                    | 1.000 ea |
| 036600008AB  | MFWSH M6 PLATED                          | 1.000 ea |
| 036000012HB  | HHCS M6X12MM LONG PLATED                 | 4.000 ea |
| 036000020KB  | MHHCS M10-1.5X20MM PLTD.                 | 4.000 ea |
| 036501008AB  | KPNUT M6-1.0 ZINCPLTED                   | 8.000 ea |
| 036610010AB  | MHSLW M10 PLATED                         | 4.000 ea |
| 419904-51AC  | BRUSH EXTRUDER DUTY C                    | 4.000 ea |
| 419905003A   | FLAT WASHER ROCKER RPM III RGG           | 4.000 ea |
| 419905008A   | HARDWARE                                 | 8.000 ea |
| 706364051RCA | BRHLD METRIC SPRING CHG.                 | 4.000 ea |
| 706372011RE  | ROCKR METRIC                             | 1.000 ea |
| 034693001AB  | PPLG - G508- use 034692001AB             | 1.000 ea |
| 034693001AB  | PPLG - G508- use 034692001AB             | 1.000 ea |
| 035000001A   | ALFTG 1/8" 1610-BL                       | 1.000 ea |
| 035000001BB  | GREASE FTG,GRS.IN                        | 1.000 ea |
| 036000060JB  | M8-1.25 X 60MM HXHDSCR                   | 2.000 ea |
| 036100070KA  | METRIC HSHCS                             | 3.000 ea |
| 036500010AB  | METRIC NUT M10-1.5PLTD400                | 4.000 ea |
| 036500010AB  | METRIC NUT M10-1.5PLTD400                | 4.000 ea |
| 406055001B   | GRFTG                                    | 1.000 ea |
| 418150003A   | GREASE FITTING CAP                       | 2.000 ea |
| 419912001A   | WWSHR                                    | 1.000 ea |
| 609830005T   | TBOLT METRIC RP609830-                   | 4.000 ea |
| 801926052A   | BRKT,ODE,C250 801926001WCC               | 1.000 ea |


|             |                                   |          |
|-------------|-----------------------------------|----------|
| 801927052A  | BRKT,DE,C250                      | 1.000 ea |
| 032018004CK | HHCS 3/8-16X1/2L PLATED           | 4.000 ea |
| 036000012HB | HHCS M6X12MM LONG PLATED          | 2.000 ea |
| 036000045JB | M8-1.25 X 45MM HXHCS              | 4.000 ea |
| 036620009AB | M8 EXTERNAL LK WASHER             | 1.000 ea |
| 065564000B  | GASK 250-280                      | 1.000 ea |
| 075453000A  | CBOXC, PAINTED 250-280            | 1.000 ea |
| 417733001D  | GASKT                             | 2.000 ea |
| 418010006A  | CAST,MPLATE,180-280,EX1,7BY       | 1.000 ea |
| 418018074A  | GROUND LABEL G100 METRIC 160 D.C. | 1.000 ea |
| 422919027   | HHCVR KIT, C250, ODE, SOLID       | 1.000 ea |
| 422919029   | HHCVR KIT, C250, DE, LOUVERED     | 1.000 ea |
| 422919029   | HHCVR KIT, C250, DE, LOUVERED     | 1.000 ea |
| 422919038   | HHCVR KIT C250 ODE SOLID          | 1.000 ea |
| 422919040   | HHCVR KIT,C250,ODE,LOUVERED       | 1.000 ea |
| 422919040   | HHCVR KIT,C250,ODE,LOUVERED       | 1.000 ea |
| 706305026A  | GUARD,SHAFT                       | 1.000 ea |
| 706320005A  | CONDUIT BOX                       | 1.000 ea |
| 000640000P  | TAG WINDING THERMOST              | 1.000 ea |
| 000692000NG | LABEL ;NP 4POLE METRIC LABEL      | 1.000 ea |
| 034180024GA | KEY 1/2X1/2X3 L                   | 1.000 ea |

609950-001

INDUSTRIAL DIRECT CURRENT MOTORS  
AND GENERATORS - RPM III

ENCLOSURE: DRIP-PROOF FULLY-GUARDED, COOLING: SELF-VENTILATED  
SPLASHPROOF, TOTALLY ENCLOSED NON-VENTILATED  
MOUNTING: FOOT ACCESSORIES: PROVISION FOR TACHOMETER MOUNTING  
METHOD OF DRIVE: COUPLED OR BELTED ONLY WHEN SPECIFIED

FRAMES SC2113ATZ THRU LC2812ATZ

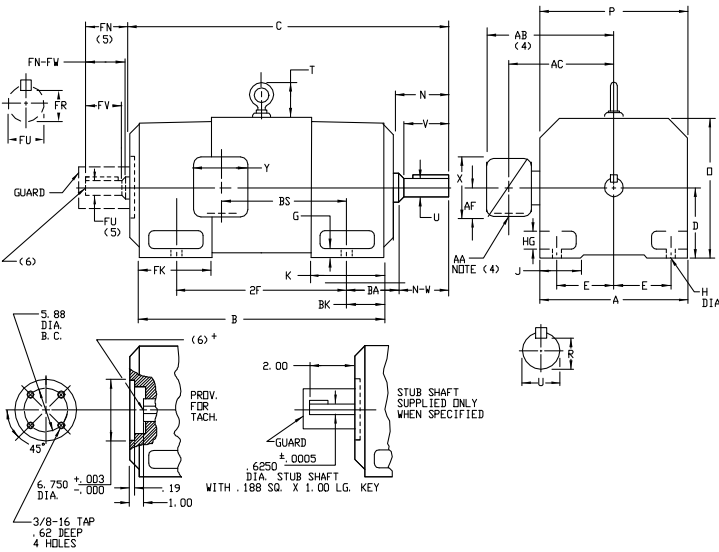

DIMENSIONS ARE IN INCHES; SEE 609950-1M FOR DIMENSIONS IN MILLIMETERS

| FRAME               | A     | X(1) | E    | G  | H  | HG   | J    | D     | P     | T    | BA   | K    | FK   | BK   |
|---------------------|-------|------|------|----|----|------|------|-------|-------|------|------|------|------|------|
| SC2113ATZ-LC2113ATZ | 10.25 | 5.25 | 4.25 | 44 | 44 | 1.38 | 1.75 | 10.44 | 10.31 | 2.56 | 3.50 | 5.19 | 6.81 | 2.38 |
| SC2512ATZ-LC2512ATZ | 12.31 | 6.25 | 5.00 | 50 | 56 | 1.62 | 2.00 | 12.50 | 12.44 | 3.06 | 4.25 | 6.06 | 8.00 | 3.00 |
| MC2812ATZ-LC2812ATZ | 13.78 | 7.00 | 5.50 | 62 | 56 | 1.88 | 2.75 | 14.00 | 13.94 | 3.38 | 4.75 | 6.75 | 9.19 | 3.50 |

| FRAME     | D(7)  | B     | BS    | 2F    | N    | N-W  | UK(2) | V    | RK(3) | SQ   | LGTH | FN   | FN-FW | FK-D  | FY   | FR-D  | SQ   | LGTH | WT  |
|-----------|-------|-------|-------|-------|------|------|-------|------|-------|------|------|------|-------|-------|------|-------|------|------|-----|
| SC2113ATZ | 28.38 | 22.50 | 11.38 | 18.00 | 4.00 | 3.75 | 1.875 | 3.50 | 1.591 | .500 | 2.50 | 3.50 | 3.25  | 1.625 | 3.00 | 1.416 | .375 | 2.25 | 315 |
| MC2113ATZ | 29.62 | 23.75 | 12.62 | 18.00 | 4.00 | 3.75 | 1.875 | 3.50 | 1.591 | .500 | 2.50 | 3.50 | 3.25  | 1.625 | 3.00 | 1.416 | .375 | 2.25 | 340 |
| LC2113ATZ | 31.25 | 25.38 | 14.25 | 18.00 | 4.00 | 3.75 | 1.875 | 3.50 | 1.591 | .500 | 2.50 | 3.50 | 3.25  | 1.625 | 3.00 | 1.416 | .375 | 2.25 | 370 |
| SC2512ATZ | 31.69 | 25.06 | 13.56 | 20.00 | 4.50 | 4.25 | 2.125 | 4.00 | 1.845 | .500 | 3.00 | 4.00 | 3.75  | 1.875 | 3.50 | 1.591 | .500 | 2.50 | 505 |
| MC2512ATZ | 33.19 | 26.56 | 15.06 | 20.00 | 4.50 | 4.25 | 2.125 | 4.00 | 1.845 | .500 | 3.00 | 4.00 | 3.75  | 1.875 | 3.50 | 1.591 | .500 | 2.50 | 540 |
| LC2512ATZ | 34.69 | 28.06 | 16.56 | 20.00 | 4.50 | 4.25 | 2.125 | 4.00 | 1.845 | .500 | 3.00 | 4.00 | 3.75  | 1.875 | 3.50 | 1.591 | .500 | 2.50 | 580 |
| MC2812ATZ | 37.38 | 29.94 | 18.25 | 22.00 | 5.00 | 4.75 | 2.375 | 4.50 | 2.021 | .625 | 3.50 | 4.50 | 4.25  | 2.125 | 4.00 | 1.845 | .500 | 3.00 | 775 |
| LC2812ATZ | 39.62 | 32.19 | 19.50 | 22.00 | 5.00 | 4.75 | 2.375 | 4.50 | 2.021 | .625 | 3.50 | 4.50 | 4.25  | 2.125 | 4.00 | 1.845 | .500 | 3.00 | 850 |

- (1) "D" DIMENSION WILL NOT BE EXCEEDED. SHIMS UP TO .03 INCHES IN THICKNESS ARE USUALLY REQUIRED FOR COUPLED OR GEARED MACHINES.  
(2) "U" AND "FU" VARY-----+ .000 - .001  
(3) "R" AND "FR" VARY-----+ .000 - .015  
(4) TERMINAL BOX VARIES WITH H.P. FOR DIMENSIONS "AA", "AB", "AC", "AF", "X" AND "Y". REFER TO BOX D/S. (STD. 609959-1, "X/P" 609959-2, MILL. 609959-3)  
(5) OPPOSITE DRIVE END SHFT SUPPLIED ONLY WHEN SPECIFIED.  
(6) MOTOR SHFT TAPPED FOR 3/8"-16 IN STUB SHFT.  
(7) WHEN THE MOTOR APPLICATION DOES NOT REQUIRE THE USE OF DPP, DRIVE END, ADD .25 TO "C" DIM FOR BRACKET COVER.  
TERMINAL BOX CAN BE ROTATED FOR LEAD OUTLET AT TOP, SIDES OR BOTTOM.  
TERMINAL BOX LOCATED ON OPPOSITE SIDE WHEN F-2, V-1, W-4, V-5, W-7, OR C-1 MOUNTING IS SPECIFIED. BOX LOCATED ON TOP WHEN SPECIFIED.  
MOTOR WEIGHT MAY VARY 15% FOR NON-STANDARD RATINGS AND/OR ACCESSORIES.  
IF MOUNTING CLEARANCE DETAILS ARE REQUIRED, CONSULT FACTORY.

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

|                          |                              |                   |
|--------------------------|------------------------------|-------------------|
| REV. DESC: LOADED TO BUS | VERSION: 00                  | TDR: 000000577407 |
| REV. LTR: -              | REVISED: 10:21:19 01/26/2011 | BY: RGGBG         |
| FILE: \RGG\00015\543     |                              |                   |
| MTL: -                   |                              |                   |

**BALDOR**

DIMENSION DRAWING, SC2113ATZ - LC2812ATZ, DPP, TENV, FOOT MTG


SH 1 of 1

609950-001

**INDUSTRIAL DIRECT CURRENT MOTORS  
AND GENERATORS - RPM III**

TERMINAL BOX DIMENSIONS

STANDARD SIZE AND ONE SIZE LARGER  
FRAMES C2113A1Z THRU C2815A1Z

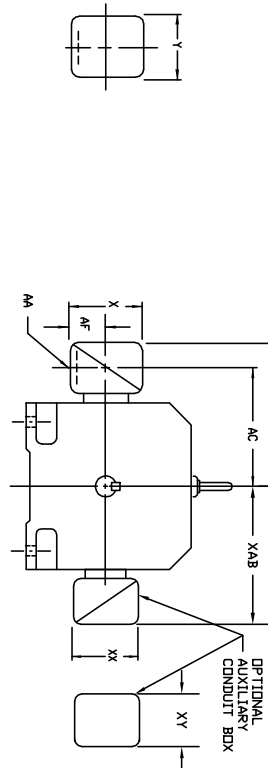

**DIMENSIONS ARE IN INCHES**

[illegible]

| CAST IRON TERMINAL BOX DIMENSIONS |              |               |       |       |      |      |        |            |                 |       |       |      |        |       |            |
|-----------------------------------|--------------|---------------|-------|-------|------|------|--------|------------|-----------------|-------|-------|------|--------|-------|------------|
| FRAME<br>SIZE                     | MAX.<br>AMPS | STANDARD SIZE |       |       |      |      | PART   |            | ONE SIZE LARGER |       |       |      |        | PART  |            |
|                                   |              | AB            | AC    | AF    | X    | Y    | NUMBER | AB         | AC              | AF    | X     | Y    | NUMBER |       |            |
| C2113M12                          | 18           | 3/4           | 10.03 | 8.03  | 2.50 | 5.00 | 5.75   | 705028-2-S | 1"              | 10.03 | 8.03  | 2.50 | 5.00   | 5.75  | 705028-2-R |
| C2113M17                          | 40           | 1"            | 10.03 | 8.03  | 2.50 | 5.00 | 5.75   | 705028-2-T | 1-1/2           | 10.97 | 8.53  | 3.00 | 6.00   | 7.00  | 705029-2-R |
| C2115M12                          | 96           | 1-1/2         | 10.97 | 8.53  | 3.00 | 6.00 | 7.00   | 705029-2-R | 2"              | 10.97 | 8.53  | 3.00 | 6.00   | 7.00  | 705029-2-S |
| C2512M12                          | 208          | 2"            | 10.97 | 8.53  | 3.00 | 6.00 | 7.00   | 705029-2-S | 2-1/2           | 12.66 | 8.91  | 3.62 | 7.88   | 9.25  | 705030-2-R |
| C2512M17                          | 18           | 3/4           | 11.09 | 9.09  | 2.50 | 5.00 | 5.75   | 705028-2-T | 1"              | 11.09 | 9.09  | 2.50 | 5.00   | 5.75  | 705028-2-T |
| C2513M12                          | 40           | 1"            | 11.09 | 9.09  | 2.50 | 5.00 | 5.75   | 705028-2-T | 1-1/2           | 12.03 | 9.59  | 3.00 | 6.00   | 7.00  | 705029-2-S |
| C2513M17                          | 96           | 1-1/2         | 12.03 | 9.59  | 3.00 | 6.00 | 7.00   | 705029-2-S | 2"              | 12.03 | 9.59  | 3.00 | 6.00   | 7.00  | 705029-2-T |
| C2515M12                          | 208          | 2"            | 12.03 | 9.59  | 3.00 | 6.00 | 7.00   | 705029-2-T | 2-1/2           | 13.72 | 9.97  | 3.62 | 7.88   | 9.25  | 705030-2-S |
| C2812M12                          | 128          | 3"            | 12.78 | 10.34 | 3.00 | 6.00 | 7.00   | 756001-R   | 3"              | 14.47 | 10.72 | 3.62 | 7.88   | 9.25  | 767001-R   |
| C2812M17                          | 165          | 3"            | 14.47 | 10.72 | 3.62 | 7.88 | 9.25   | 767001-R   | 4"              | 15.78 | 11.59 | 4.12 | 9.50   | 10.50 | 767001-R   |
| C2815M12                          | 365          | 4"            | 15.78 | 11.59 | 4.12 | 9.50 | 10.50  | 767001-R   | 5" (4)          | 18.59 | 13.34 | 4.75 | 13.50  | 15.00 | 768701-S   |

| CONDUIT BOX DIMENSIONS WITH TERMINAL BORDERS (IEC TYPE BOX) |      |       |       |      |       |     |       |                          |                          |  |
|-------------------------------------------------------------|------|-------|-------|------|-------|-----|-------|--------------------------|--------------------------|--|
| STANDARD SIZE                                               |      |       |       |      |       |     |       |                          |                          |  |
| FRAME SIZE                                                  | AMPS | AB    | AC    | AF   | X     | AA  | Y     | PART NUMBER              | PART NUMBER              |  |
| C210                                                        | 100  | 10.71 | 8.98  | 2.72 | 7.48  | --- | 7.48  | 706310-56-A              | 706310-225-R             |  |
|                                                             | 200  | 11.26 | 9.25  | 3.35 | 8.82  | --- | 8.82  | 706310-56-B              | 706310-225-R             |  |
|                                                             | 100  | 11.30 | 9.57  | 2.72 | 7.48  | --- | 7.48  | 706310-56-A              | 706310-225-R             |  |
|                                                             | 200  | 11.85 | 9.84  | 3.35 | 8.82  | --- | 8.82  | 706310-56-B              | 706310-225-R             |  |
| C250                                                        | 400  | 17.48 | 12.75 | 6.20 | 14.39 | --- | 14.39 | 706310-63-B & 706310-636 | 706310-63-B & 706310-636 |  |
|                                                             | 800  | 17.48 | 12.75 | 6.20 | 14.39 | --- | 14.39 | 706310-63-B & 706310-636 | 706310-63-B & 706310-636 |  |
|                                                             | 200  | 12.60 | 10.99 | 3.76 | 8.82  | --- | 8.82  | 706310-56-B              | 706310-225-R             |  |
|                                                             | 400  | 18.27 | 13.54 | 6.20 | 14.39 | --- | 14.39 | 706310-63-B & 706310-636 | 706310-63-B & 706310-636 |  |
| C280                                                        | 800  | 18.27 | 13.54 | 6.20 | 14.39 | --- | 14.39 | 706310-63-B & 706310-636 | 706310-63-B & 706310-636 |  |
|                                                             | 1600 | 18.27 | 13.54 | 7.68 | 15.35 | --- | 15.35 | 706310-63-C              | 706310-63-C              |  |

| FRAME SIZE |      | X-Y  |      | PART NUMBER |      |
|------------|------|------|------|-------------|------|
| C310       | 7.98 | 4.25 | 4.25 | 602007-26-A | C310 |
| C350       | 8.44 | 4.23 | 4.23 | 602007-26-A | C350 |
| C380       | 9.12 | 4.23 | 4.23 | 602007-26-A | C380 |

- (1) STEEL JOINT.
- (2) STEEL TERMINAL BOX FOR CELL13A17 AND CELL12A17.
- (3) FRAMES PROVIDED WITH DOUBLE KNOCKOUT.
- (4) 100% PIPE TAP.
- (5) TERMINAL BOX 76870-SR AND 76870-SR EXTENDS BELOW MOTOR FEET.
- (6) TERMINAL BOX CAN BE RATED FOR LEAD OUTLET AT TOP, SIZES PER BOTTOM TERMINAL BOX LOCATED ON OPPOSITE SIDE WHEN "E-2, W-4, W-5, W-7, W-8, W-9, W-10, W-11, W-12, W-13, W-14, W-15, W-16, W-17, W-18, W-19, W-20, W-21, W-22, W-23, W-24, W-25, W-26, W-27, W-28, W-29, W-30, W-31, W-32, W-33, W-34, W-35, W-36, W-37, W-38, W-39, W-40, W-41, W-42, W-43, W-44, W-45, W-46, W-47, W-48, W-49, W-50, W-51, W-52, W-53, W-54, W-55, W-56, W-57, W-58, W-59, W-60, W-61, W-62, W-63, W-64, W-65, W-66, W-67, W-68, W-69, W-70, W-71, W-72, W-73, W-74, W-75, W-76, W-77, W-78, W-79, W-80, W-81, W-82, W-83, W-84, W-85, W-86, W-87, W-88, W-89, W-90, W-91, W-92, W-93, W-94, W-95, W-96, W-97, W-98, W-99, W-100, W-101, W-102, W-103, W-104, W-105, W-106, W-107, W-108, W-109, W-110, W-111, W-112, W-113, W-114, W-115, W-116, W-117, W-118, W-119, W-120, W-121, W-122, W-123, W-124, W-125, W-126, W-127, W-128, W-129, W-130, W-131, W-132, W-133, W-134, W-135, W-136, W-137, W-138, W-139, W-140, W-141, W-142, W-143, W-144, W-145, W-146, W-147, W-148, W-149, W-150, W-151, W-152, W-153, W-154, W-155, W-156, W-157, W-158, W-159, W-160, W-161, W-162, W-163, W-164, W-165, W-166, W-167, W-168, W-169, W-170, W-171, W-172, W-173, W-174, W-175, W-176, W-177, W-178, W-179, W-180, W-181, W-182, W-183, W-184, W-185, W-186, W-187, W-188, W-189, W-190, W-191, W-192, W-193, W-194, W-195, W-196, W-197, W-198, W-199, W-200, W-201, W-202, W-203, W-204, W-205, W-206, W-207, W-208, W-209, W-210, W-211, W-212, W-213, W-214, W-215, W-216, W-217, W-218, W-219, W-220, W-221, W-222, W-223, W-224, W-225, W-226, W-227, W-228, W-229, W-230, W-231, W-232, W-233, W-234, W-235, W-236, W-237, W-238, W-239, W-240, W-241, W-242, W-243, W-244, W-245, W-246, W-247, W-248, W-249, W-250, W-251, W-252, W-253, W-254, W-255, W-256, W-257, W-258, W-259, W-260, W-261, W-262, W-263, W-264, W-265, W-266, W-267, W-268, W-269, W-270, W-271, W-272, W-273, W-274, W-275, W-276, W-277, W-278, W-279, W-280, W-281, W-282, W-283, W-284, W-285, W-286, W-287, W-288, W-289, W-290, W-291, W-292, W-293, W-294, W-295, W-296, W-297, W-298, W-299, W-300, W-301, W-302, W-303, W-304, W-305, W-306, W-307, W-308, W-309, W-310, W-311, W-312, W-313, W-314, W-315, W-316, W-317, W-318, W-319, W-320, W-321, W-322, W-323, W-324, W-325, W-326, W-327, W-328, W-329, W-330, W-331, W-332, W-333, W-334, W-335, W-336, W-337, W-338, W-339, W-340, W-341, W-342, W-343, W-344, W-345, W-346, W-347, W-348, W-349, W-350, W-351, W-352, W-353, W-354, W-355, W-356, W-357, W-358, W-359, W-360, W-361, W-362, W-363, W-364, W-365, W-366, W-367, W-368, W-369, W-370, W-371, W-372, W-373, W-374, W-375, W-376, W-377, W-378, W-379, W-380, W-381, W-382, W-383, W-384, W-385, W-386, W-387, W-388, W-389, W-390, W-391, W-392, W-393, W-394, W-395, W-396, W-397, W-398, W-399, W-400, W-401, W-402, W-403, W-404, W-405, W-406, W-407, W-408, W-409, W-410, W-411, W-412, W-413, W-414, W-415, W-416, W-417, W-418, W-419, W-420, W-421, W-422, W-423, W-424, W-425, W-426, W-427, W-428, W-429, W-430, W-431, W-432, W-433, W-434, W-435, W-436, W-437, W-438, W-439, W-440, W-441, W-442, W-443, W-444, W-445, W-446, W-447, W-448, W-449, W-450, W-451, W-452, W-453, W-454, W-455, W-456, W-457, W-458, W-459, W-460, W-461, W-462, W-463, W-464, W-465, W-466, W-467, W-468, W-469, W-470, W-471, W-472, W-473, W-474, W-475, W-476, W-477, W-478, W-479, W-480, W-481, W-482, W-483, W-484, W-485, W-486, W-487, W-488, W-489, W-490, W-491, W-492, W-493, W-494, W-495, W-496, W-497, W-498, W-499, W-500, W-501, W-502, W-503, W-504, W-505, W-506, W-507, W-508, W-509, W-510, W-511, W-512, W-513, W-514, W-515, W-516, W-517, W-518, W-519, W-520, W-521, W-522, W-523, W-524, W-525, W-526, W-527, W-528, W-529, W-530, W-531, W-532, W-533, W-534, W-535, W-536, W-537, W-538, W-539, W-540, W-541, W-542, W-543, W-544, W-545, W-546, W-547, W-548, W-549, W-550, W-551, W-552, W-553, W-554, W-555, W-556, W-557, W-558, W-559, W-560, W-561, W-562, W-563, W-564, W-565, W-566, W-567, W-568, W-569, W-570, W-571, W-572, W-573, W-574, W-575, W-576, W-577, W-578, W-579, W-580, W-581, W-582, W-583, W-584, W-585, W-586, W-587, W-588, W-589, W-590, W-591, W-592, W-593, W-594, W-595, W-596, W-597, W-598, W-599, W-600, W-601, W-602, W-603, W-604, W-605, W-606, W-607, W-608, W-609, W-610, W-611, W-612, W-613, W-614, W-615, W-616, W-617, W-618, W-619, W-620, W-621, W-622, W-623, W-624, W-625, W-626, W-627, W-628, W-629, W-630, W-631, W-632, W-633, W-634, W-635, W-636, W-637, W-638, W-639, W-640, W-641, W-642, W-643, W-644, W-645, W-646, W-647, W-648, W-649, W-650, W-651, W-652, W-653, W-654, W-655, W-656, W-657, W-658, W-659, W-660, W-661, W-662, W-663, W-664, W-665, W-666, W-667, W-668, W-669, W-670, W-671, W-672, W-673, W-674, W-675, W-676, W-677, W-678, W-679, W-680,

609959-001

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

|                                                         |             |                              |
|---------------------------------------------------------|-------------|------------------------------|
| REV. DESC: ADD 706310-63G C/BOX TO C250 AND C280 FRAMES |             |                              |
| REV. LTR: A                                             | VERSION: 01 | TDR: 000000816512            |
| FILE: \RGG\00021\153                                    |             | REVISED: 03:09:09 09/06/2013 |
| MTL: -                                                  |             | BY: RGGWT                    |

# BALDOIR

DIMENSION SHEET

SH 1 of 1

