

ABB BALDOR RELIANCE III

Customer information packet

DRX181564T

1.5HP, 1170//970RPM, 3PH, 60HZ, 182T, XPFC, F1

Class - CLI GP C,D

Division - Division I

Specifications

Enclosure	XPFC
Frame	182T
Frame Material	Iron
Frequency	50.00 Hz 60.00 Hz
Haz Area Class and Group	CLI GP C,D
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	1.500 HP @ 60 HZ 1.000 HP @ 50 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 190.0 V @ 50 HZ 230.0 V @ 60 HZ 380.0 V @ 50 HZ
Agency Approvals	UL CSA EEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	2.297 A @ 380.0 V 2.500 A @ 460.0 V 4.400 A @ 190.0 V 5.000 A @ 230.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT

Part Detail

Revision	C
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	06WGW969
Layout	06LY-000-044
Eff. date	02-28-2024
CD Diagram	CD0005
Poles	06
Leads	9#16
Proprietary	False
Created date	05-01-2019

Efficiency @ 100% Load	87.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	2.3 a
Insulation Class	F
Inverter Code	Inverter Duty
IP Rating	NONE
KVA Code	K
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	1800 rpm
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0630M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	17.56 IN
Power Factor	65
Product Family	General Purpose
Pulley Face Code	Standard
Rodent Screen	None
RoHS Status	ROHS NON-COMPLIANT
Service Factor	1.00
Shaft Diameter	1.125 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1170 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor

Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1401XPSLEV												
NO.							CC	010A				
S/N							TEMP CODE		T3C			
SPEC.	06-0000-0118						INV.TYPE		PWM			
CAT.NO.	DRX181564T						C HP FR	60	C HP TO	90		
HP	1.5//1						CT HZ FROM		6	CT HZ TO		60
VOLTS	230/460//190/380						VT HZ FROM		6	VT HZ TO		60
AMPS	5/2.5//4.4/2.297						MAG CUR		3/1.5			
RPM	1170//970						MX RPM		1800			
HZ	60//50	PH	3	CL	F	NOM.EFF.		87.5				
SER.F.	1.00	DES	B	SL HZ	1.5	WK2	0.282					
FRAME	182T	RATING		40C AMB-CONT								
	55C AMB @1.0SF											
	1.15SF SINEWAVE						NEMA MG-1 PT 5,IP55					

Parts List

Part number	Description	Quantity
SA369210	SA 06-0000-0118	1.000 ea
RA358764	RA 06-0000-0118	1.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
LC0145B01	CONNECTION LABEL	1.000 ea
NP1401XPSLEV	SS XP INV UL CSA-EEV CC CL-I GP-C&D	1.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
LB1081F	ALUM XP CAUTION LABEL (FS PLANT ONLY-	1.000 ea
HW3201A05	3/8-16 EYEBOLT	1.000 ea
06FH1003A06	FH, XP W/GRSR	1.000 ea
51XN1032A14	10-32 X 0.875 HX WS SL SR	4.000 ea
36FN3000C01SP	EXFN, PLASTIC, 5.25 OD, .912 ID	1.000 ea
51XB1214A16	12-14X1.00 HXWSSLD SERTYB	1.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
06EP1709A08	FRONT XPFC 205 BRG GRP C W/ DRAIN (HW450	1.000 ea
10XN3118K20	5/16-18 X 1 1/4 GRADE 5 STEEL ZC PLATED	4.000 ea
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	4.000 ea
HW5100A05	WVY WSHR F/205 & 304 BRGS	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
HW4500A19	1/4-28X1/4 SLOTTED PLUG F/S	1.000 ea
HW4506A02	BREATHER/DRAIN-EXP PROOF-.125-27 NPTF AI	1.000 ea
HW3022E05	.125 DIA X .500 ROLLED SPRING PIN	1.000 ea
36EP1718A16	PULLEY 206 BRG GROUP C W/GRSR, DRAIN & S	1.000 ea
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	4.000 ea
10XN3118K20	5/16-18 X 1 1/4 GRADE 5 STEEL ZC PLATED	4.000 ea
HA2065A01	ALUM SLINGER 206 BRGS DRILL RIG MOTOR	1.000 ea
80XN1032J07	10-32 X 7/16 SET SCREW, HEX SOC, CUP PT	2.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
HW4500A19	1/4-28X1/4 SLOTTED PLUG F/S	1.000 ea
HW4506A02	BREATHER/DRAIN-EXP PROOF-.125-27 NPTF AI	1.000 ea
HW3022E05	.125 DIA X .500 ROLLED SPRING PIN	1.000 ea

07CB1000A02	CONDUIT BOX, MODEL 306,EXP. PROOF	1.000 ea
10XN2520A14	1/4 20X7/8 HX HD CAP	4.000 ea
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	4.000 ea
WD1000B17	T&B CX35TN OR L35P TERMINAL LUG	1.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
07CB1502A01	CONDUIT BOX LID MACH (DUCTILE IRON)	1.000 ea
10XN2520K16	1/4-20 X 1" HX HD SCRW GRADE 5, ZINC P	4.000 ea
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	4.000 ea
MG1500Y02	WILKOPON PRIMER YELLOW	0.022 ga
MG1025G29	WILKOFAS, 789.229, DARK CHARCOAL GRAY	0.022 ga
37PA1074	PALLET PACK GRP, PRINT BOX PK1026A06	1.000 ea
HW2501E16	KEY, 1/4 SQ X 1.750	1.000 ea

ABB Motors and Mechanical Inc.

WINDING # 06WGW969

Typical performance - not guaranteed values.

1.5 HP 3 PH 60 HZ 1170 RPM 460 V 0630M

TORQUES (LB-FT): PO=23.83 PU=12.5 LR=15.8 LRA=16.19

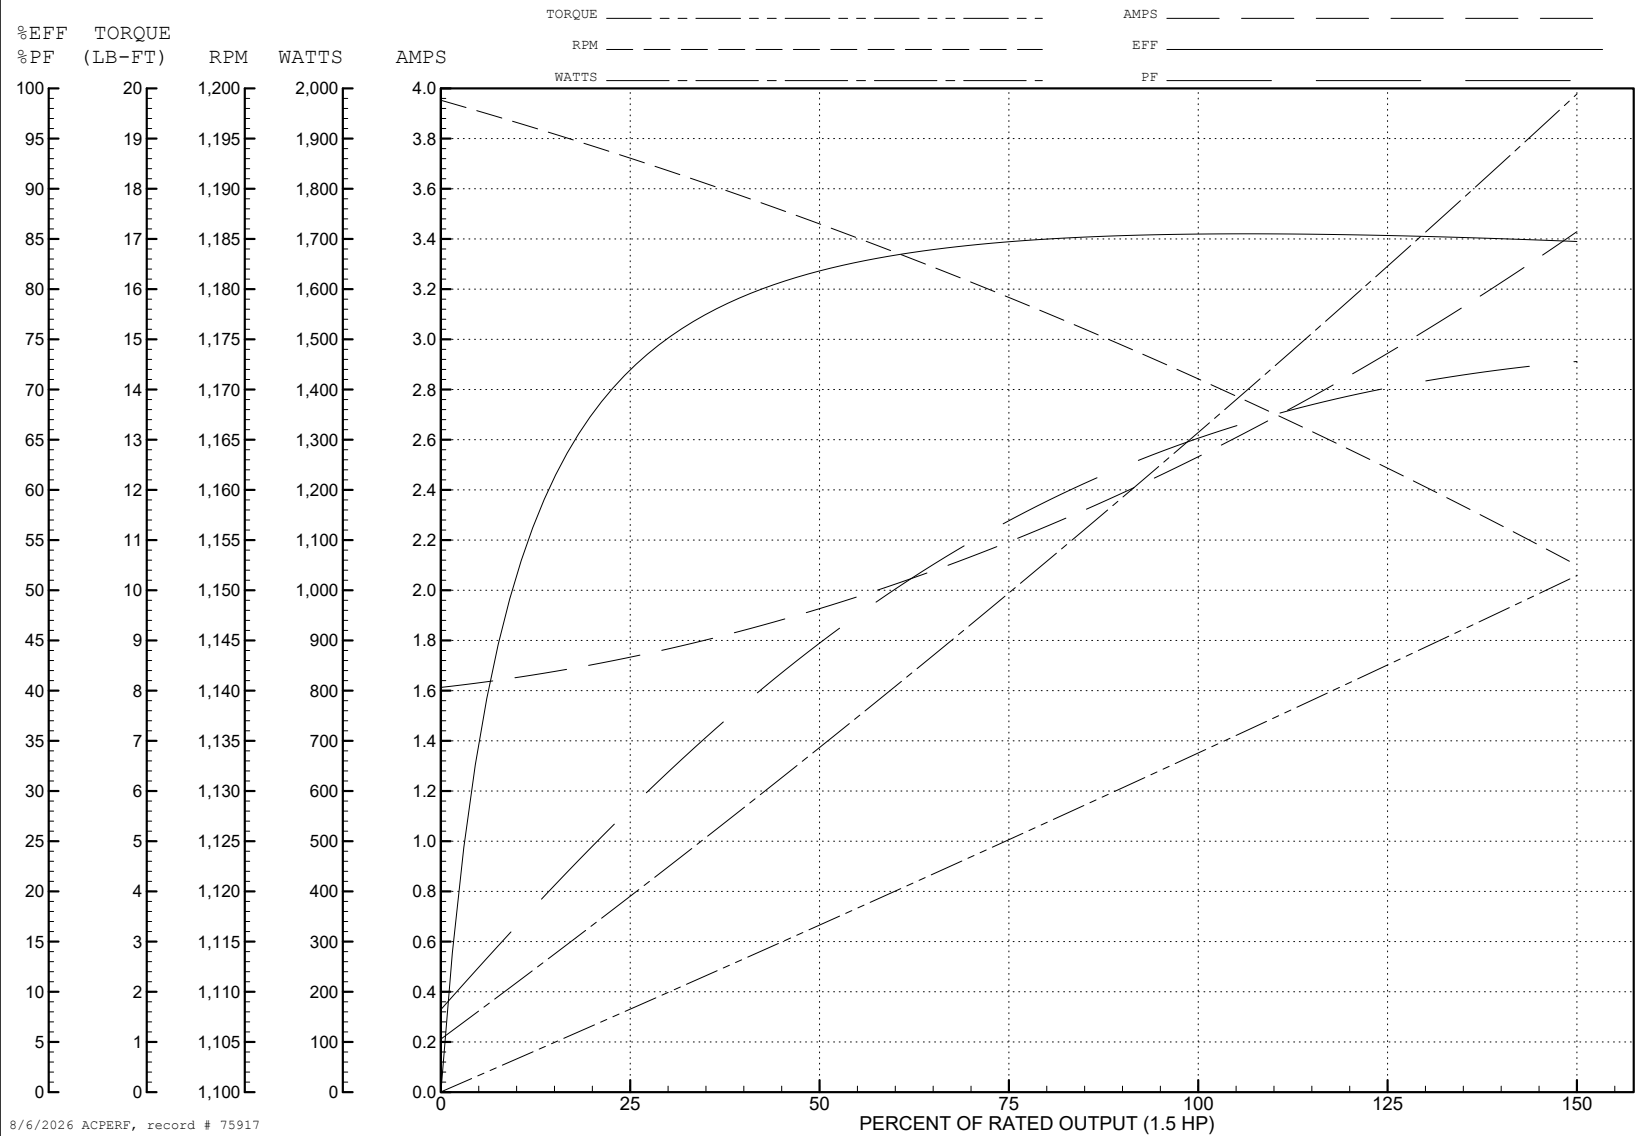


ABB Motors and Mechanical Inc.

WINDING # 06WGW969

Typical performance - not guaranteed values.

1 HP 3 PH 50 HZ 1170 RPM 380 V 0630M

TORQUES (LB-FT): PO=22.86 PU=13.14 LR=16.61 LRA=15.76

