ABB BALDOR RELIANCE

Customer information packet

DRX251544T-5

15HP, 1765RPM, 3PH, 60HZ, 254T, XPFC, F1
Class - CLI GP C,D
Division - Division I

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/5/2026 12:58:02 AM

Specifications

Enclosure	XPFC
Frame	254T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP C,D
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	15.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	CSA EEV
	UL
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	14.600 A @ 575.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	92.4 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	14.6 a
Insulation Class	F
Inverter Code	Inverter Duty

Part Detail

Revision	J
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	09WGT124
Layout	09LYF369
Eff. date	02-14-2024
CD Diagram	CD0006
Poles	04
Leads	3#12
Proprietary	False
Created date	07-19-2019

IP Rating	NONE
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	2700 rpm
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0944M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	25.50 IN
Power Factor	83
Product Family	Hazardous Location Motor
Pulley Face Code	Standard
Rodent Screen	None
RoHS Status	ROHS NON-COMPLIANT
Service Factor	1.00
Shaft Diameter	1.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1765 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1401XPSLEV

NO.					**CC**	010A					
S/N					**TEMP CODE**	T3C					
SPEC.	09-0000-1596				**INV.TYPE**	PWM					
CAT.NO.	DRX251544T-5				**C HP FR**	60	**C HP TO**	90			
HP	15				**CT HZ FROM**	6			**CT HZ TO**	60	
VOLTS	575				**VT HZ FROM**	6			**VT HZ TO**	60	
AMPS	14.6			**MAG CUR**	6.1						
RPM	1765			**MX RPM**	2700						
HZ	60	**PH**	3	**CL**	F	**NOM.EFF.**	92.4				
SER.F.	1.00	**DES**	A	**SL HZ**	1.2	**WK2**	1.93				
FRAME	254T	**RATING**	40C AMB-CONT								
	55C AMB @ 1.0 SF, 60C RISE										
	1.15SF ON SINEWAVE			NEMA MG-1 PT.5,IP55							

Parts List

Part number	Description	Quantity
SA372078	SA 09-0000-1596	1.000 ea
RA361802	RA 09-0000-1596	1.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
LC0006	CONNECTION LABEL	1.000 ea
NP1401XPSLEV	SS XP INV UL CSA-EEV CC CL-I GP-C&D	1.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	4.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
LB1081Z	ALUM XP CAUTION LABEL (ZK PLANT ONLY-	1.000 ea
HW3201A01	1/2-13 EYEBOLT	1.000 ea
HW1002A63	WASHER, 5/8 HI-COLLAR SPRLCKWASHER	1.000 ea
HA1025A03	FELT WSH 2.1875 OD X 1.170 ID X .25 #321	8.000 ea
09FH1004A03P	FAN COVER, MACH PRIMED	1.000 ea
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	3.000 ea
10XN2520K14	1/4-20 X .88 HEX GRD 5 (20001)	3.000 ea
LD7020D03	LEAD SET, 12AWG, 3 LEAD, 20" LONG LEADS	1.000 ea
37FN3002B02	EXFN, PLASTIC, 7.50 OD, 1.503 ID	1.000 ea
HW2500A25	WOODRUFF KEY USA #1008 #BLOW CARBON STEE	1.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.080 lb
10XN3816K28	3/8-16 X 1.75 HEX HD CAP SCREW, GRADE 5	4.000 ea
HW1001A38	LOCKWASHER 3/8, ZINC PLT .688 OD, .382 I	4.000 ea
HA2065A03	ALUM SLINGER 208 BRGS DRILL RIG MOTOR	1.000 ea
80XN1032J07	10-32 X 7/16 SET SCREW, HEX SOC, CUP PT	2.000 ea
80XN1032J07	10-32 X 7/16 SET SCREW, HEX SOC, CUP PT	1.000 ea
HW5100A08	W3118-035 WVY WSHR (WB)	1.000 ea
HW4500A20	1/8NPT SL PIPE PLUG	2.000 ea
HW4505A02	BREATHER/DRAIN-EXP PROOF-.250-18 PTF AIS	1.000 ea
HW3023E06	.125 X .625 SPIRAL SPRING PIN	1.000 ea
09EP1707A16P	PU E.P., MACH. W/DRAIN HW4505A02 W/PRIME	1.000 ea
HW1001A38	LOCKWASHER 3/8, ZINC PLT .688 OD, .382 I	4.000 ea
10XN3816K28	3/8-16 X 1.75 HEX HD CAP SCREW, GRADE 5	4.000 ea

HA2066A01	ALUM SLINGER 309 BRG DRILL RIG MOTOR	1.000 ea
10XN2520K36	1/4-20 X 2.25" HX HD SCRWGRADE 5, ZINC P	4.000 ea
HW4500A20	1/8NPT SL PIPE PLUG	1.000 ea
HW4505A02	BREATHER/DRAIN-EXP PROOF-.250-18 PTF AIS	1.000 ea
HW4500A20	1/8NPT SL PIPE PLUG	1.000 ea
HW3023E06	.125 X .625 SPIRAL SPRING PIN	1.000 ea
09EP1700A65LP5	FR ENDPLATE, MACH, XPFC W/ALUM SLINGER	1.000 ea
09CB1003A01P	KOBX, MACH 1.25 NPT GROUP C MTRS PRIMED	1.000 ea
10XN3118K24	5/16-18 X 1.50" HEX HD, GRADE 5	4.000 ea
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	4.000 ea
WD1000B25	GND LUG, BURNDY L125HP OR T&B L125HP-BB	1.000 ea
10XN3118K12	5/16-18 X .75 GRADE 5, ZINC PLATED	1.000 ea
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	1.000 ea
09CB1502A01P	CONDUIT BOX LID MACH. GROUP C MTRS W/EP	1.000 ea
84XN5013J24	1/2-13 X 1-1/2 HEX SOCKET HD CAP SCREW	6.000 ea
HW1001A50	LOCKWASHER 1/2, ZINC PLT,.879 OD, .509 I	6.000 ea
MG1025G29	WILKOFAST, 789.229, DARK CHARCOAL GRAY	0.070 ga
40PA1005	PACKAGING GROUP, 09 STD	1.000 ea
HW2501G25	KEY, 3/8 SQ X 2.875	1.000 ea
MJ5000A09	EFI KIT #1578 (400 ML CARTRIDGE OF EFI	0.200 ea
MJ5001A27	32220KN GRAY SEALER *MIN BUY 4 QTS=1GAL	0.001 qt

AC Induction Motor Performance Data
Record # 60046
Typical performance - not guaranteed values

Winding: 09WGT124-R014	**Type:** M	**Enclosure:** XPFC

Nameplate Data				**575 V, 60 Hz: Single Voltage Motor**	
Rated Output (HP)			15	**Full Load Torque**	44.5 LB-FT
Volts			575	**Start Configuration**	direct on line
Full Load Amps			14.6	**Breakdown Torque**	153 LB-FT
R.P.M.			1765	**Pull-up Torque**	69.5 LB-FT
Hz	60	**Phase**	3	**Locked-rotor Torque**	86.5 LB-FT
NEMA Design Code	A	**KVA Code**	H	**Starting Current**	102 A
Service Factor (S.F.)			1	**No-load Current**	6.05 A
NEMA Nom. Eff.	92.4	**Power Factor**	83	**Line-line Res. @ 25ºC**	0.874 Ω
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	54°C
				Locked-rotor Power Factor	33
				Rotor inertia	1.92 LB-FT2

Load Characteristics 575 V, 60 Hz, 15 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**
Power Factor	45	69	78	83	85	87
Efficiency	88.1	92.3	92.6	92.4	91.5	90.5
Speed	1791	1783	1774	1765	1755	1743
Line amperes	6.9	8.8	11.6	14.6	18.1	21.5


ABB Motors and Mechanical Inc.


WINDING # 09WGT124

15 HP 3 PH 60 HZ 1765 RPM 575 V M

Typical performance - not guaranteed values.


TORQUES(LB-FT): PO=153 PU=69.5 LR=86.5 LRA=102

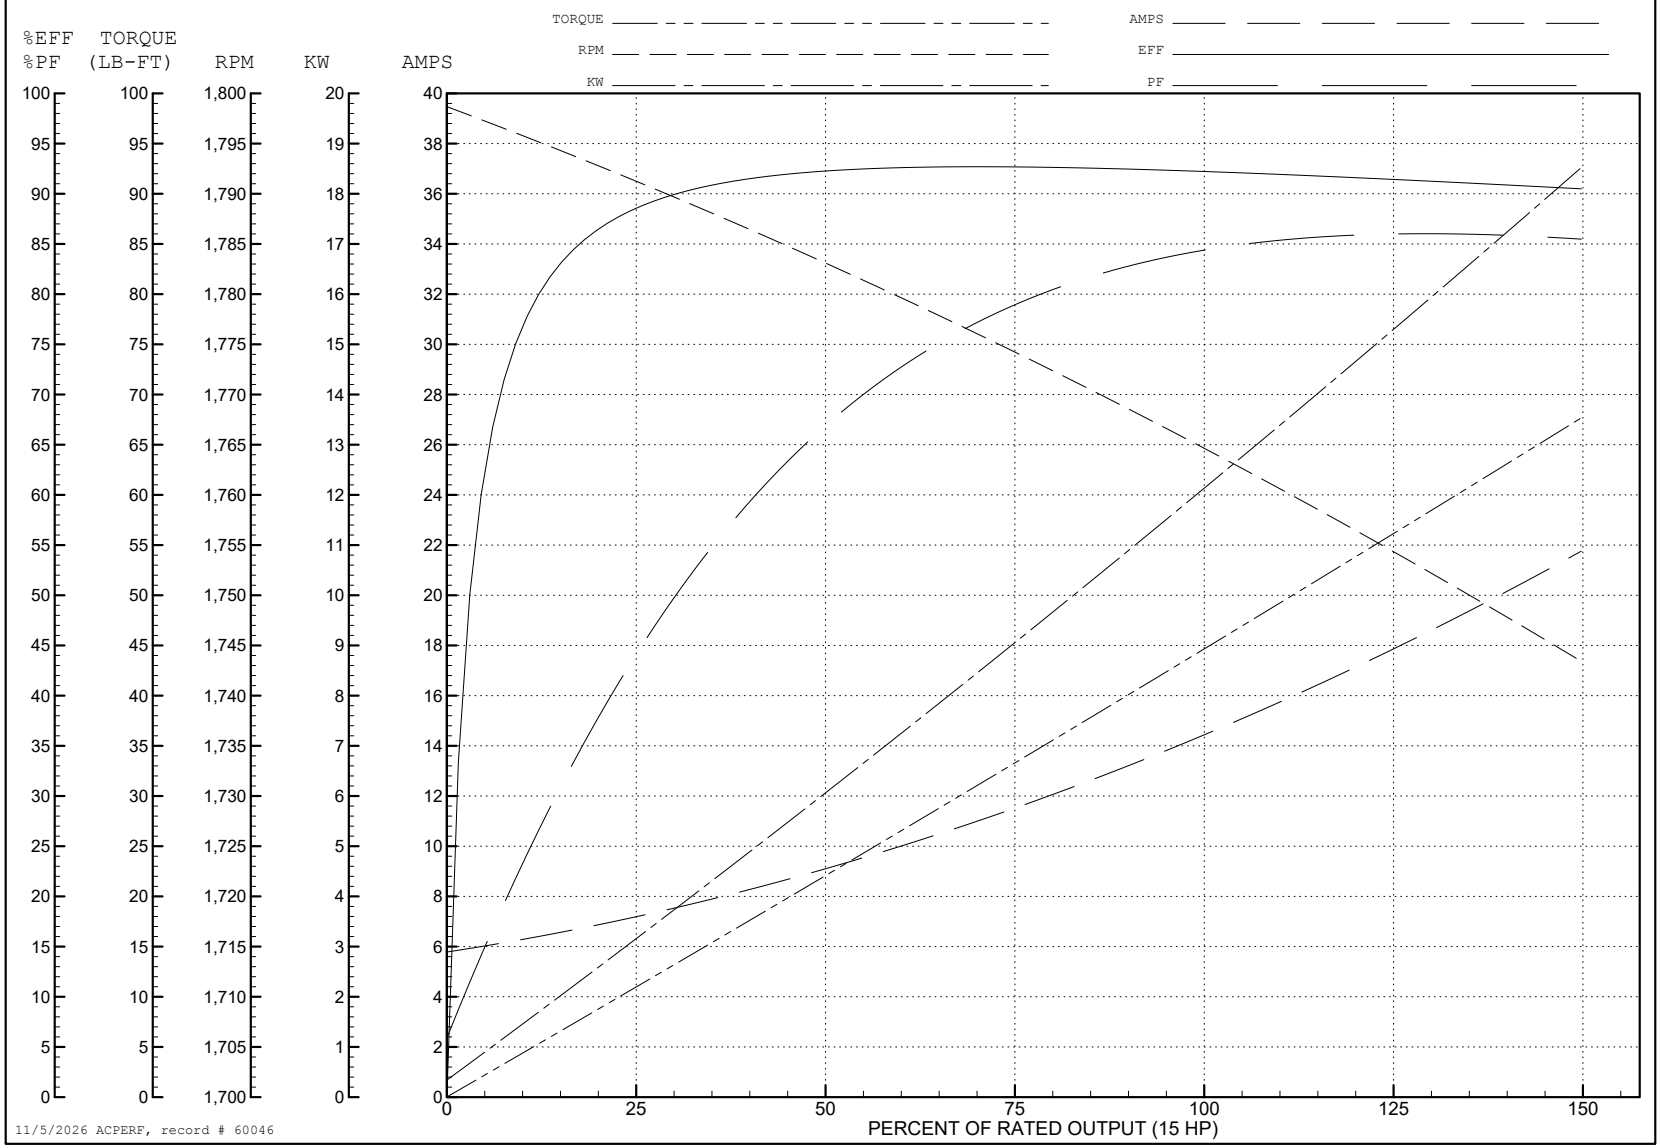


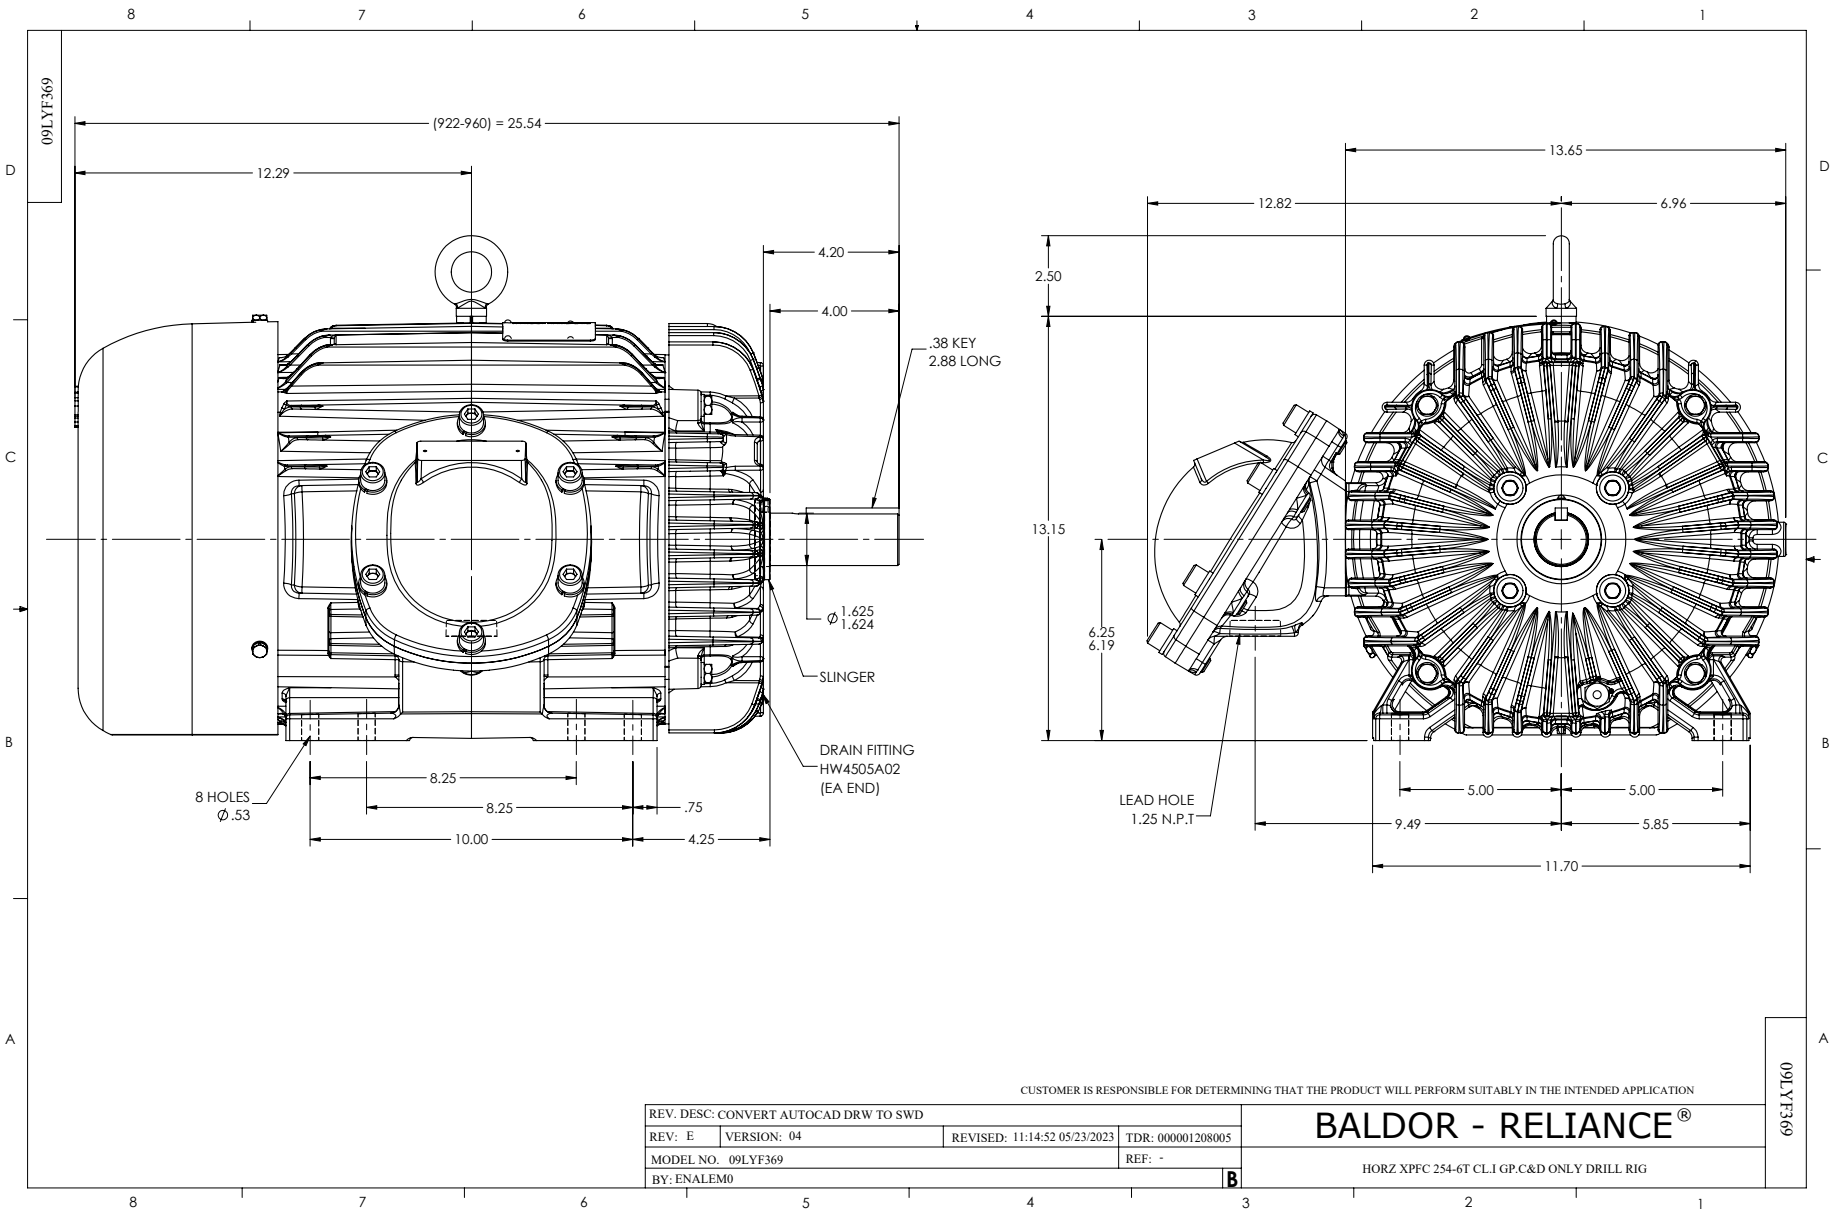
09LYF369
(922-960) = 25.54
12.29
4.20
4.00
.38 KEY
2.88 LONG
Ø 1.625
1.624
SLINGER
DRAIN FITTING
HW4505A02
(EA END)
8 HOLES
Ø .53
8.25
8.25
.75
10.00
4.25
13.65
12.82
6.96
2.50
13.15
6.25
6.19
LEAD HOLE
1.25 N.P.T
5.00
5.00
9.49
5.85
11.70
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: CONVERT AUTOCAD DRW TO SWD
REV: E
VERSION: 04
REVISED: 11:14:52 05/23/2023
TDR: 000001208005
MODEL NO. 09LYF369
REF: -
BY: ENALEM0
B
BALDOR - RELIANCE®
HORZ XPFC 254-6T CL.I GP.C&D ONLY DRILL RIG
09LYF369


CD0006

TYPICAL WYE–CONNECTED MOTOR

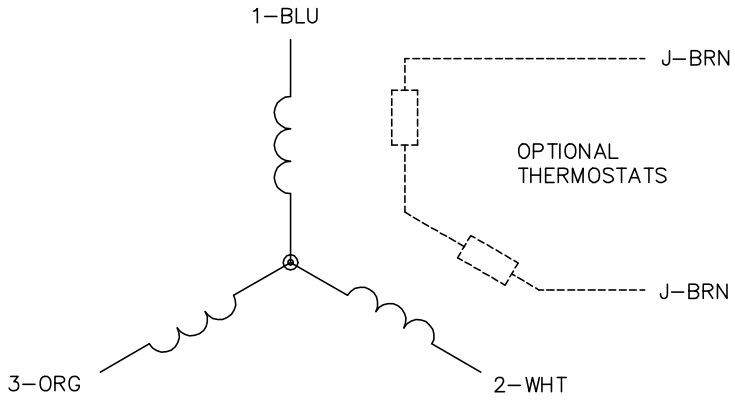



TYPICAL DELTA–CONNECTED MOTOR

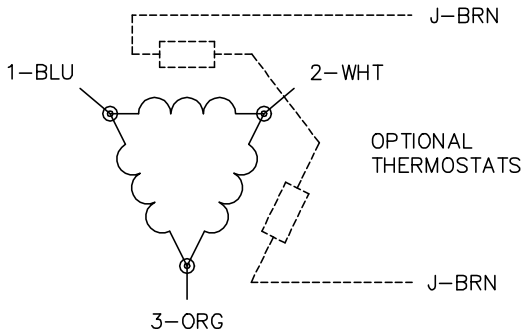

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10:24:49 02/19/2019	BY: ENBRIR0
MTL: –		

BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1