

ABB BALDOR RELIANCE III

Customer information packet

DRX32544T

50HP, 1775//1475RPM, 3PH, 60HZ, 326T, XP, F1

Class - CLI GP C,D

Division - Division I

Specifications

Enclosure	XP
Frame	326T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP C,D
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	50.000 HP @ 60 HZ 40.000 HP @ 50 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 190.0 V @ 50 HZ 230.0 V @ 60 HZ 380.0 V @ 50 HZ
Agency Approvals	UL CSA EEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	114.000 A @ 190.0 V 118.000 A @ 230.0 V 57.000 A @ 380.0 V 59.000 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	94.5 %

Part Detail

Revision	J
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	12WGY585
Layout	12LYG128
Eff. date	11-05-2024
CD Diagram	CD0180
Poles	04
Leads	9#8
Proprietary	False
Created date	03-07-2019

Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	57.0 a
Insulation Class	F
Inverter Code	Inverter Duty
IP Rating	NONE
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	2700 rpm
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	1276M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	32.00 IN
Power Factor	84
Product Family	Chemical Process Features
Pulley Face Code	Standard
Rodent Screen	None
RoHS Status	ROHS NON-COMPLIANT
Service Factor	1.00
Shaft Diameter	2.125 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1775 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2

None

Nameplate

NP1401XPSLEV												
NO.							CC	010A				
S/N							TEMP CODE	T3C				
SPEC.	12-0000-0550						INV.TYPE	PWM				
CAT.NO.	DRX32544T						C HP FR	60	C HP TO	90		
HP	50//40						CT HZ FROM	6	CT HZ TO	60		
VOLTS	230/460//190/380						VT HZ FROM	6	VT HZ TO	60		
AMPS	118/59//114/57				MAG CUR		50/25					
RPM	1775//1475				MX RPM		2700					
HZ	60//50	PH	3	CL	F	NOM.EFF.	94.5					
SER.F.	1.00	DES	A	SL HZ	0.83	WK2	10.1					
FRAME	326T	RATING		40C AMB-CONT								
	55C AMB AT 1.0 SF, 60C RISE											
	1.15SF ON SINEWAVE						NEMA MG-1 PT.5,IP55					

Parts List

Part number	Description	Quantity
SA366949	SA 12-0000-0550	1.000 ea
RA356400	RA 12-0000-0550	1.000 ea
LC0181	CONNECTION LABEL	1.000 ea
NP1401XPSLEV	SS XP INV UL CSA-EEV CC CL-I GP-C&D	1.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	4.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
LB1081C	ALUM XP CAUTION LABEL (COL PLANT ONLY-	1.000 ea
14PA2000	PKGP, CTN ID 42X34X25, STD BASE	1.000 ea
10XN3816E08	3/8-16 X .50 HEX HD SCREW BRONZE	1.000 ea
HW1001B38	WASHER, 3/8 SPLT LK, CS, .678OD X .382ID	1.000 ea
12FH1001A07P	FAN COVER, MACH W/EPOXY PRIMER & SLOT FO	1.000 ea
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	3.000 ea
10XN3118K12	5/16-18 X .75 GRADE 5, ZINC PLATED	3.000 ea
09FN3001B03SP	EXTERNAL FAN, PLASTIC (COMES W/SCREW FRO	1.000 ea
HW2500A25	WOODRUFF KEY USA #1008 #BLOW CARBON STEE	1.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.200 lb
10XN5013J44	1/2-13X2.75 HX HD BOLT, GR8,1.25" THD LG	4.000 ea
HW1001A50	LOCKWASHER 1/2, ZINC PLT,.879 OD, .509 I	4.000 ea
HA2067A01	ALUM SLINGER 311 BRG DRILL RIG MOTOR	1.000 ea
80XN1032J07	10-32 X 7/16 SET SCREW, HEX SOC, CUP PT	2.000 ea
HW5100A13	W4627-047 WVY WSHER	1.000 ea
HA4017A03	.125 X 1.75 GREASE EXT (F/S)	1.000 ea
HA4017A08	.125X3.50 GREASER EXTEN.	1.000 ea
HW4019A01	PIPE COUPLING 1/8 NPT,STEEL,ZINC COATING	1.000 ea
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 ea
HW4500A21	1618BALEMITE FITTING 825 UNIVERSAL	1.000 ea
HW4500A17	317400 ALEMITE GREASE RELIEF	1.000 ea
HW4505A02	BREATHING/DRAIN-EXP PROOF-.250-18 PTF AIS	1.000 ea
HW3023E06	.125 X .625 SPIRAL SPRING PIN	1.000 ea
12EP1706A08P	EP, MACH. XPFC 312 BRG. W/DRAIN HW4505A0	1.000 ea

HW1001A50	LOCKWASHER 1/2, ZINC PLT,.879 OD, .509 I	4.000 ea
10XN5013J44	1/2-13X2.75 HX HD BOLT, GR8,1.25" THD LG	4.000 ea
HA2067A02	ALUM SLINGER 312 BRG DRILL RIG MOTOR	1.000 ea
80XN1032J07	10-32 X 7/16 SET SCREW, HEX SOC, CUP PT	2.000 ea
10XN3118K40	5/16-18 X 2.75" HEX HD, GRADE 5	4.000 ea
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 ea
HW4500A03	GREASE FITTING, .125 NPT 1610(ALEMITE) 8	1.000 ea
HW4500A17	317400 ALEMITE GREASE RELIEF	1.000 ea
HW4505A02	BREATHER/DRAIN-EXP PROOF-.250-18 PTF AIS	1.000 ea
HW3023E06	.125 X .625 SPIRAL SPRING PIN	1.000 ea
12EP1705A34LP5	FREP MACH. 312 W/EPOXY PRIMER & PAINT	1.000 ea
12CB1003A01P	KOBX,MACH 2.00 NPT GROUP C MTRS,EPOXY PR	1.000 ea
10XN3118K24	5/16-18 X 1.50" HEX HD, GRADE 5	4.000 ea
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	4.000 ea
WD1000B19	TERMINAL BURNDY L250HP	1.000 ea
10XN3816K08	3/8-16 X .50 HEX HD CAP SCREW GRADE 5	1.000 ea
HW1001A38	LOCKWASHER 3/8, ZINC PLT .688 OD, .382 I	1.000 ea
12CB1502A01P	CONDUIT BOX LID MACH. GROUP C MTRS	1.000 ea
84XN5013J32	SOCKET HD.CAP SCR,1/2-13 X 2"LG,ALLOY ST	10.000 ea
HW1001A50	LOCKWASHER 1/2, ZINC PLT,.879 OD, .509 I	10.000 ea
MG1025G29	WILKOFAS, 789.229, DARK CHARCOAL GRAY	0.125 ga
MJ5001A27	32220KN GRAY SEALER *MIN BUY 4 QTS=1GAL	0.031 qt
MJ5002A01	SILICON RUBBER SEALANT, 732CL 10.3 OZ TU	0.033 ea
HW2501H34	KEY, 1/2 SQ X 4.00	1.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea

ABB Motors and Mechanical Inc.

WINDING # 12WGY585

Typical performance - not guaranteed values.

50 HP 3 PH 60 HZ 1775 RPM 460 V 1276M

TORQUES (LB-FT): PO=561 PU=236 LR=279 LRA=475

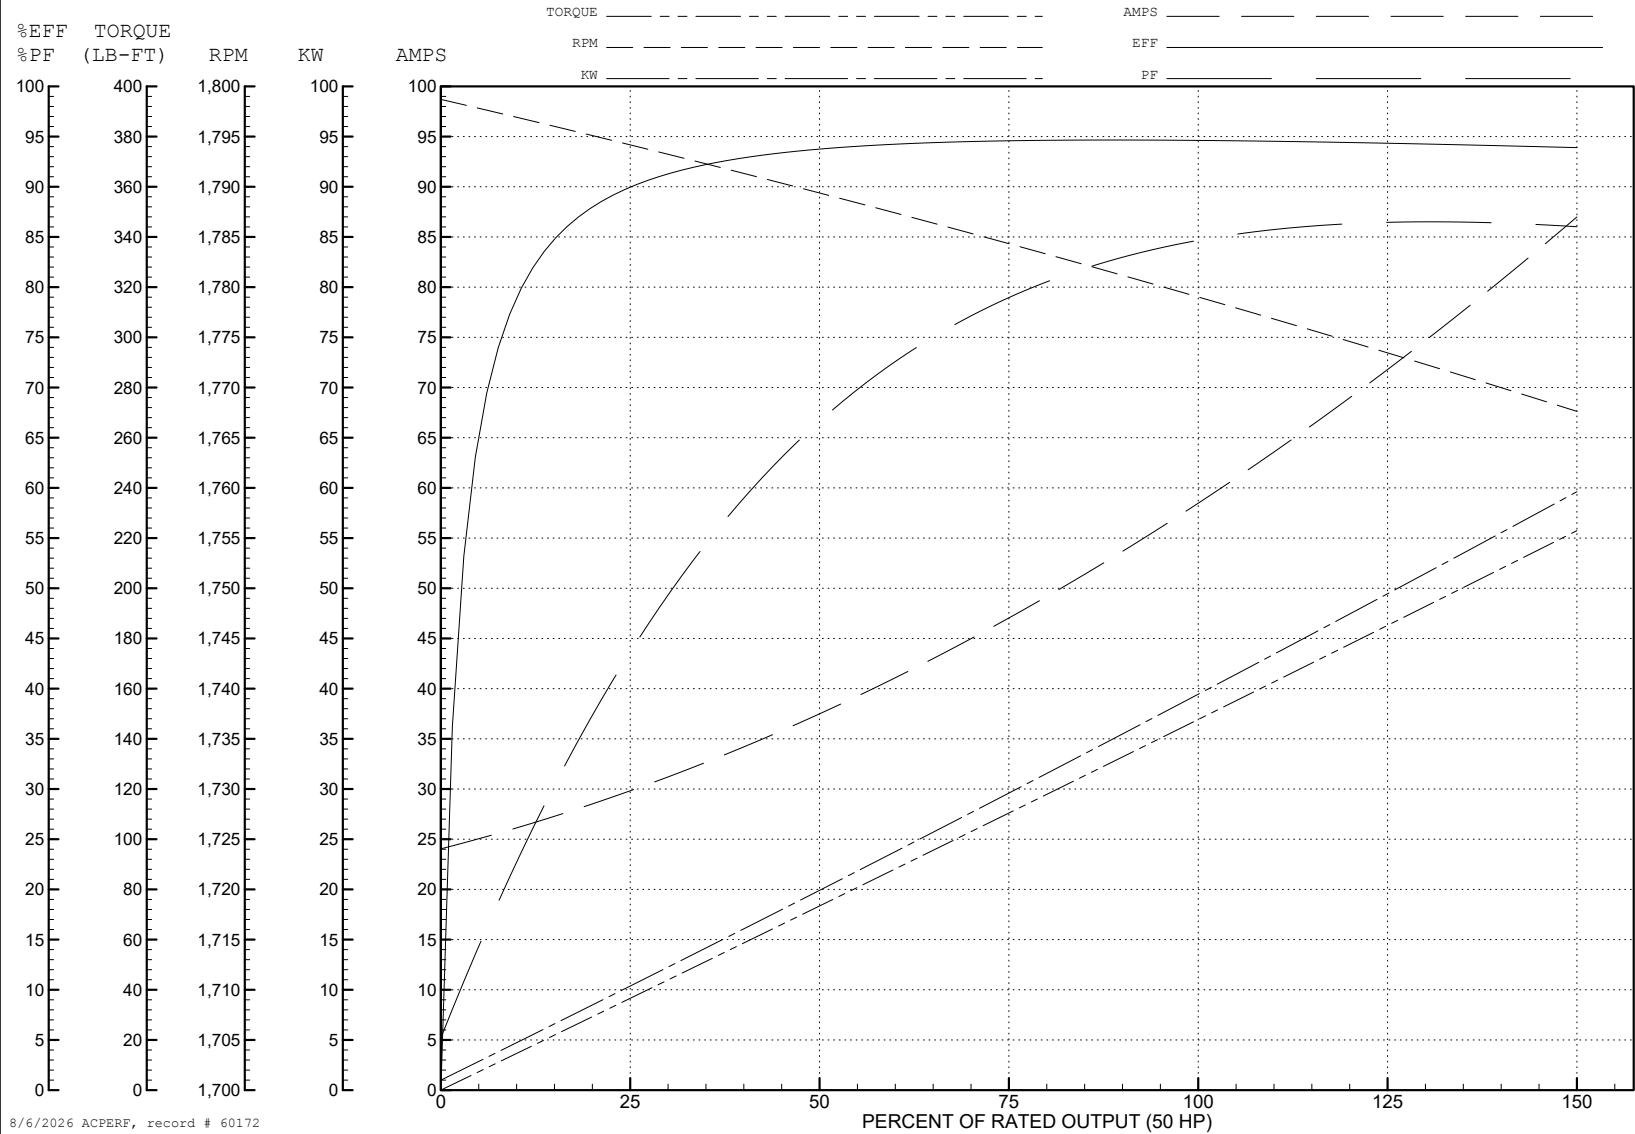



ABB Motors and Mechanical Inc.


WINDING # 12WGY585

Typical performance - not guaranteed values.

40 HP 3 PH 50 HZ 1480 RPM 380 V 1276M

TORQUES (LB-FT): PO=544 PU=248 LR=293 LRA=465

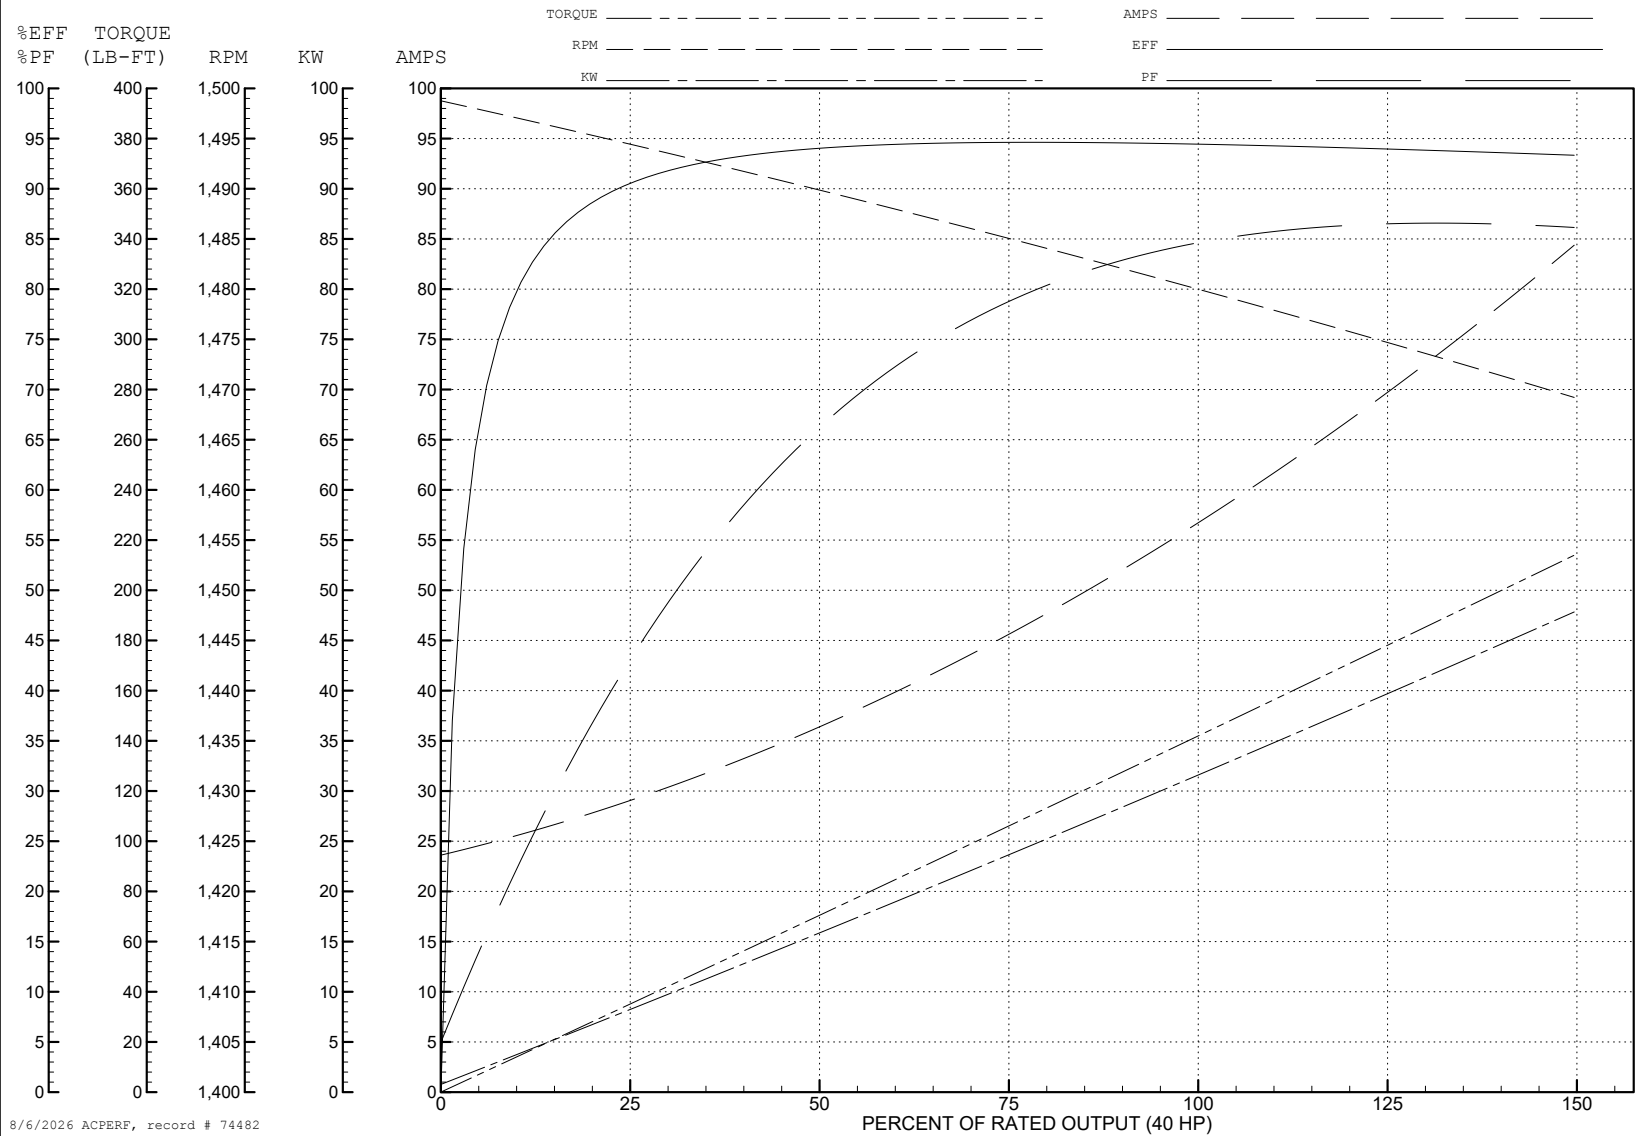

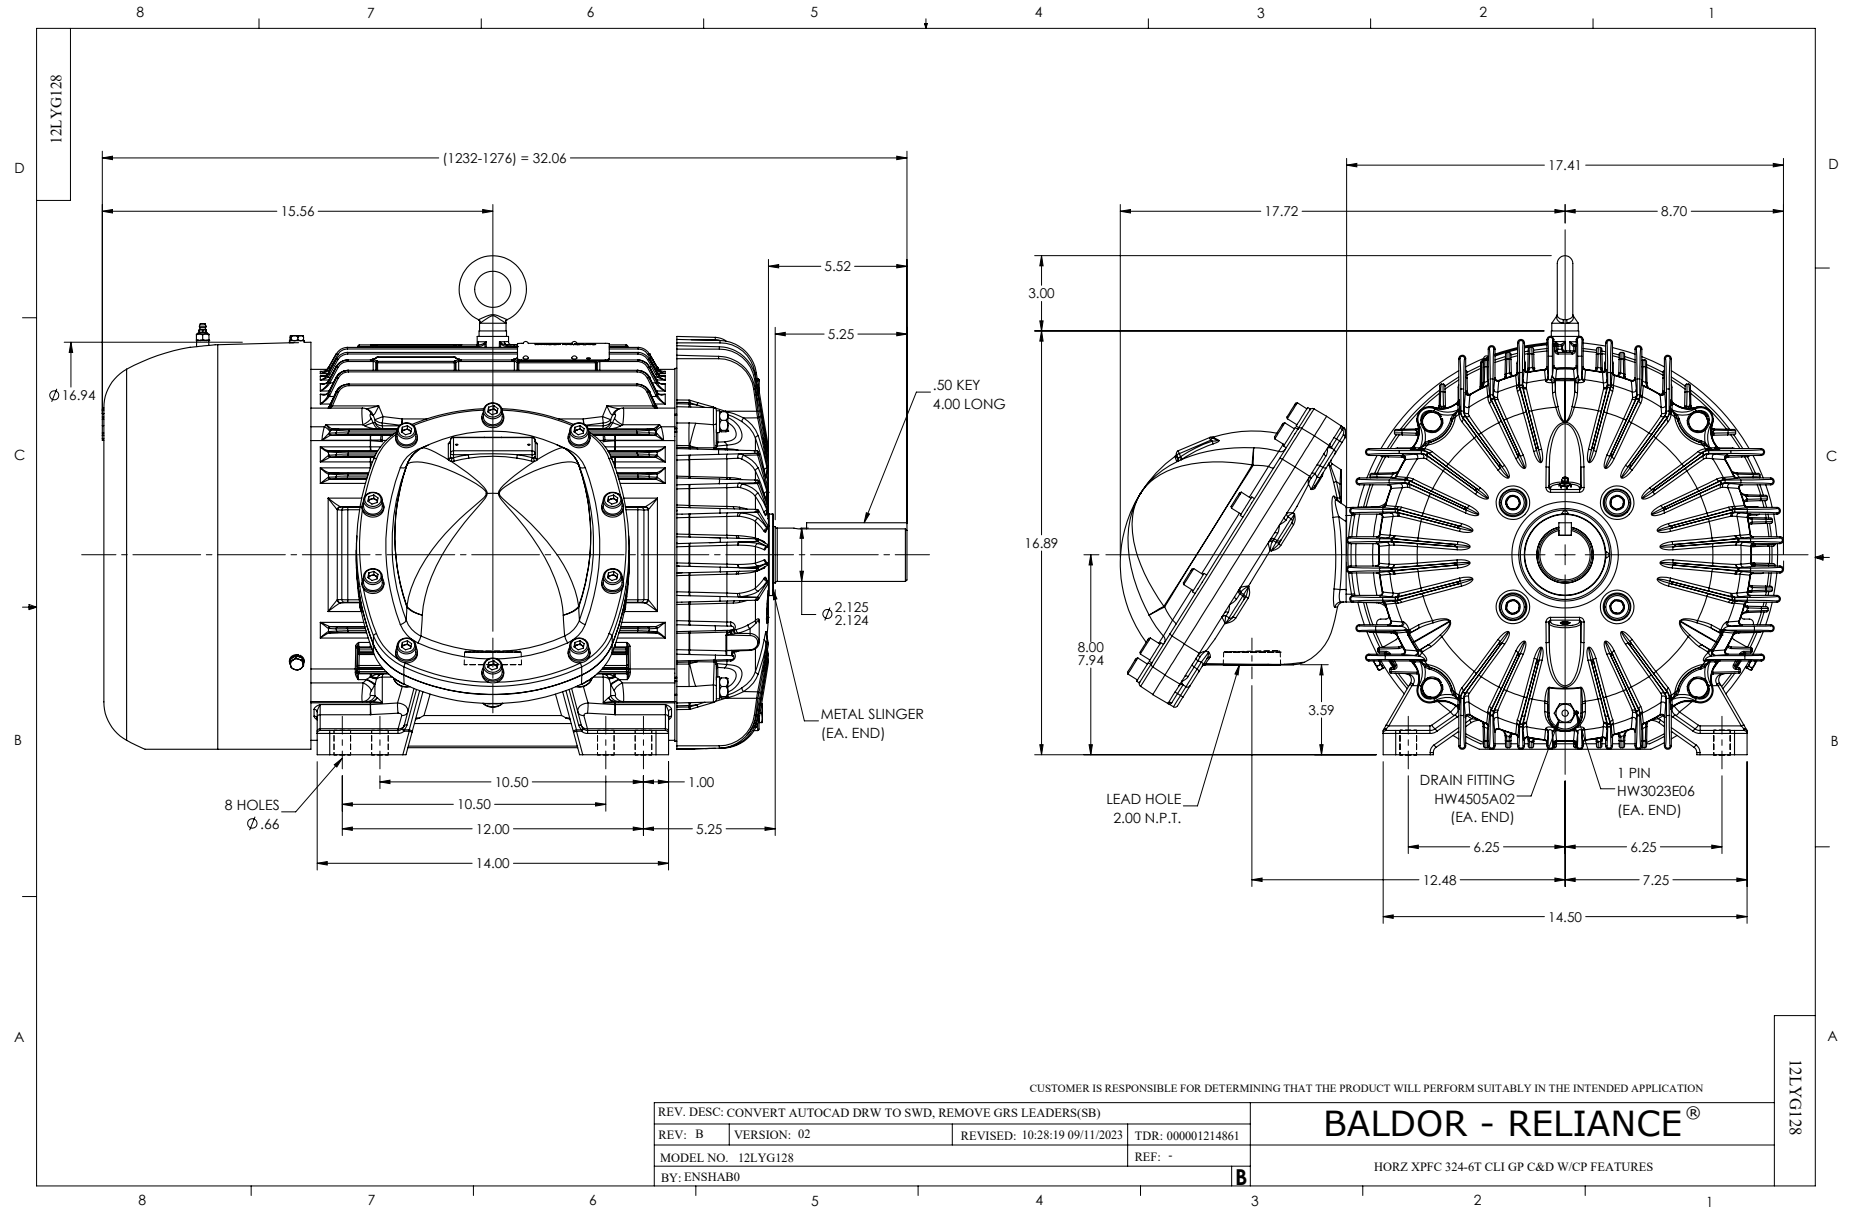

CD0180



LOW VOLTAGE
(2D)



HIGH VOLTAGE
(1D)



NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007

REV. LTR: D

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\148

REVISED: 10: 25: 29 02/19/2019

BY: ENBRIRO

MTL: —



BALDOR - RELIANCE®

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1