

ABB BALDOR RELIANCE III

Customer information packet

DRX36464T

40HP, 1190RPM, 3PH, 60HZ, 364T, TEFC, F1

Class - CLI GP C,D

Division - Division I

Specifications

Enclosure	TEFC
Frame	364T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CL I GP C,D
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	40.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV CSA UL
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Constant Torque Speed Range	6-60
Current @ Voltage	49.800 A @ 460.0 V 99.600 A @ 230.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	94.1 %
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	49.8 a
Insulation Class	F
Inverter Code	Inverter Ready

Part Detail

Revision	-
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A36WG1194
Layout	611742-772
Eff. date	05-29-2019
CD Diagram	416820-002
Poles	06
Leads	3#4,6#6
Proprietary	False
Created date	05-01-2019

IP Rating	NONE
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Max Speed	2700 rpm
Motor Lead Quantity/Wire Size	3 @ 4 AWG
Motor Standards	NEMA
Motor Type	A36062M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	33.48 IN
Power Factor	80
Product Family	General Industrial
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.00
Shaft Diameter	2.374 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1190 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat

Nameplate

NP2496L	
MOBIL POLYREX EM	

000692000FX



000613006PC		
CLASS I GROUP	C D X	NO.
CLASS II GROUP	X X X	
OPERATING TEMP CODE	T3C	

NP3140L

SPEC NO.	A36-7817-1194			CAT.NO.		DRX36464T					FRAME	364T
HP	40	VOLTS	230/460		PHASE	3	DESIGN	B	TYPE	P		
RPM	1190	AMPS	99.6/49.8		HZ	60	AMB	40	SF	1.00		
DRIVE END BEARING	65BC03J30X		DUTY	CONT	INSUL.CLASS			F				
OPP D.E. BEARING	65BC03J30X		ENCL	TEFC	CODE	G						
SF	1.15	WK2	20.223	MAG CUR	37/18.5		RPM MAX	2700				
CT HZ	6-60	VT HZ	0-60	CHP HZ	60-90		NEMA-NOM-EFF			94.1		
	SUIT FOR 55C AMB AT 1.00 SF					IP55						
SER.NO.				MOTOR WEIGHT			908					

Parts List

Part number	Description	Quantity
SA369075	SA A36-7817-1194	1.000 ea
RA358616	RA A36-7817-1194	1.000 ea
421948032	LABEL, MYLAR	1.000 ea
NP2496L	MOTOR LUBE NAMEPLATE	1.000 ea
000692000JF	CAUTION LABEL TO PREVENT IGNITION	1.000 ea
000692000VD	LABEL WARNING	1.000 ea
000692000FX	UL LISTED LOGO LABEL 2.53 X 0.75 X .018	1.000 ea
000613006PC	N/P U/L (REL QTY 500)	1.000 ea
NP3140L	INVERTER DUTY, SS, CC, CSA-C US, CSA EEV	1.000 ea
609158001B	SLGR - 360	1.000 ea
603284001S	SLGR - 360	1.000 ea
087793060EN	BRKT STD ALT DWG E360 FCXP/POCKET FOR	1.000 ea
415072001B	CLAMP	1.000 ea
078559001A	+FANCV - 360	1.000 ea
034180012DA	KEY 1X4X1/4X1-1/2 L	1.000 ea
078550001M	FAN KB 60/30 (30) 360	1.000 ea
004824015A	GREASE POLYREX EM	0.540 lb
032018008AK	HHCS 1/4-20X1 PLATED	4.000 ea
032018018CK	HHCS 3/8-16X2-1/4 PLTD.	2.000 ea
415096002A	CPLG 1/8 HEX TYPE	1.000 ea
415045002E	SLGR	1.000 ea
410700004F	WSHR	1.000 ea
034017016AB	LCKW 1/2" PLATED	4.000 ea
035000001G	GREASE RELIEF FITTING, ALEMITE 317400	1.000 ea
034017012AB	LCKW 1/4 STD. PLATED 034017012AF	4.000 ea
032130020DB	HSHCS 1/2-13X2-1/2 PLTD.	4.000 ea
034017014AB	LCKW 3/8 STD. PLATED	2.000 ea
034530056AC	P/NIP 1/8X7L GALV-365	1.000 ea
402558000DDA	BRDRN	1.000 ea
034600001AA	BUSH 1/4TO1/8 BLACK	1.000 ea
034600001AA	BUSH 1/4TO1/8 BLACK	1.000 ea

087793060EN	BRKT STD ALT DWG E360 FCXP/POCKET FOR	1.000 ea
032018018CK	HHCS 3/8-16X2-1/4 PLTD.	2.000 ea
415045002E	SLGR	1.000 ea
034017016AB	LCKW 1/2" PLATED	4.000 ea
034017014AB	LCKW 3/8 STD. PLATED	2.000 ea
402558000DDA	BRDRN	1.000 ea
034530020AB	P/NIP 1/8X2-1/2 PLTED	1.000 ea
415096002A	CPLG 1/8 HEX TYPE	1.000 ea
032130020DB	HHCS 1/2-13X2-1/2 PLTD.	4.000 ea
035000001G	GREASE RELIEF FITTING, ALEMITE 317400	1.000 ea
073646000E	C/B 320 WA073646000 KB	1.000 ea
064069000A	C/BC320/360 X 064069000B	1.000 ea
418150003A	GREASE FITTING CAP	1.000 ea
032018014DK	HHCS 1/2-13X1-3/4 PLTD	4.000 ea
063916001DE	+P/NIP 3X2-5/8 DIMPL-360	1.000 ea
034017016AB	LCKW 1/2" PLATED	4.000 ea
035000001A	ALFTG 1/8" 1610-BL	1.000 ea
415000103A	T/LUG #14AWG-#4AWG W/HOLE FOR .250 BOLT	1.000 ea
406099000A	PLUG - FAN COVER 320-440	1.000 ea
032018004AM	HHCS 1/4-20X1/2PLTD GREN	1.000 ea
034036012AB	CKW EXTERNAL TOOTH 1/4"	1.000 ea
035000001A	ALFTG 1/8" 1610-BL	1.000 ea
418150003A	GREASE FITTING CAP	1.000 ea
MG1025G29	WILKOFAS, 789.229, DARK CHARCOAL GRAY	0.250 ga
033775004EA	DRSCR #6-1/4 304 S.S.	8.000 ea
034180034HA	KEY 5/8X5/8X4-1/4 L	1.000 ea
14PA1000	PACKAGING 314 GROUP COMBINED PRINT	1.000 ea
HW1000A32	5/16 FL WASHER WIDE,ID=.344,OD=1.125	3.000 ea
032509020C	CARRIAGE BOLT - 360	3.000 ea

ABB BALDOR RELIANCE III S/O	CUSTOMER INFORMATION PACKET					
	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	364T	40	P	3/60	1190	230/460
AMPS	DUTY	AMB °C/ INSUL	S.F.	NEMA DESIGN	CODE LETTER	ENCLOSURE
99.6/49.8	CONT	40/F	1.00	B	G	TEFC
E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)		
491378	418141088JE	---	---	.0373/.149		
PERFORMANCE						
LOAD	HP	AMPERES	RPM	% POWER FACTOR	% EFFICIENCY	
NO LOAD	0	18.5	1200	5.70	0	
1/4	10.0	22.4	1197	47.0	89.2	
2/4	20.0	29.6	1194	67.8	93.2	
3/4	30.0	39.1	1191	76.3	94.1	
4/4	40.0	49.8	1188	79.9	94.1	
5/4	50.0	61.2	1184	81.6	93.7	
SPEED TORQUE						
		RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES	
LOCKED ROTOR		0	165	291	300	
PULL UP		480	142	251	274	
BREAKDOWN		1134	251	444	172	
FULL LOAD		1188	100	177	49.8	
AMPERES SHOWN FOR 460 VOLT CONNECTION. IF OTHER CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.						
TYPICAL DATA XE MOTOR-NEMA NOM. EFF. 94.1 % GUARANTEED MIN. EFF. 93.0%						
		DRAWN BY: <u>T.G. KELATI</u> CHECKED BY: <u>D. H. MAY</u> APPROVED BY: <u>E.J. CHRISTIAN</u> DATE: <u>10/12/06</u>		AC MOTOR PERFORMANCE DATA		A36WG1194-R015
						DATE ISSUED 01/24/25

FRAME 364T

VOLTS 230/460

NEMA DESIGN B

TEST S.O. TYPICAL DATA

HP 40

AMPS 99.6/49.8

CODE LETTER G

TEST DATE ---

TYPE P

DUTY CONT

ENCLOSURE TEFC


STATOR RES. @ 25°C .0373/.149

PHASE / HERTZ 3/60

AMB °C / INSUL 40/F

E/S 491378

OHMS (BETWEEN LINES)

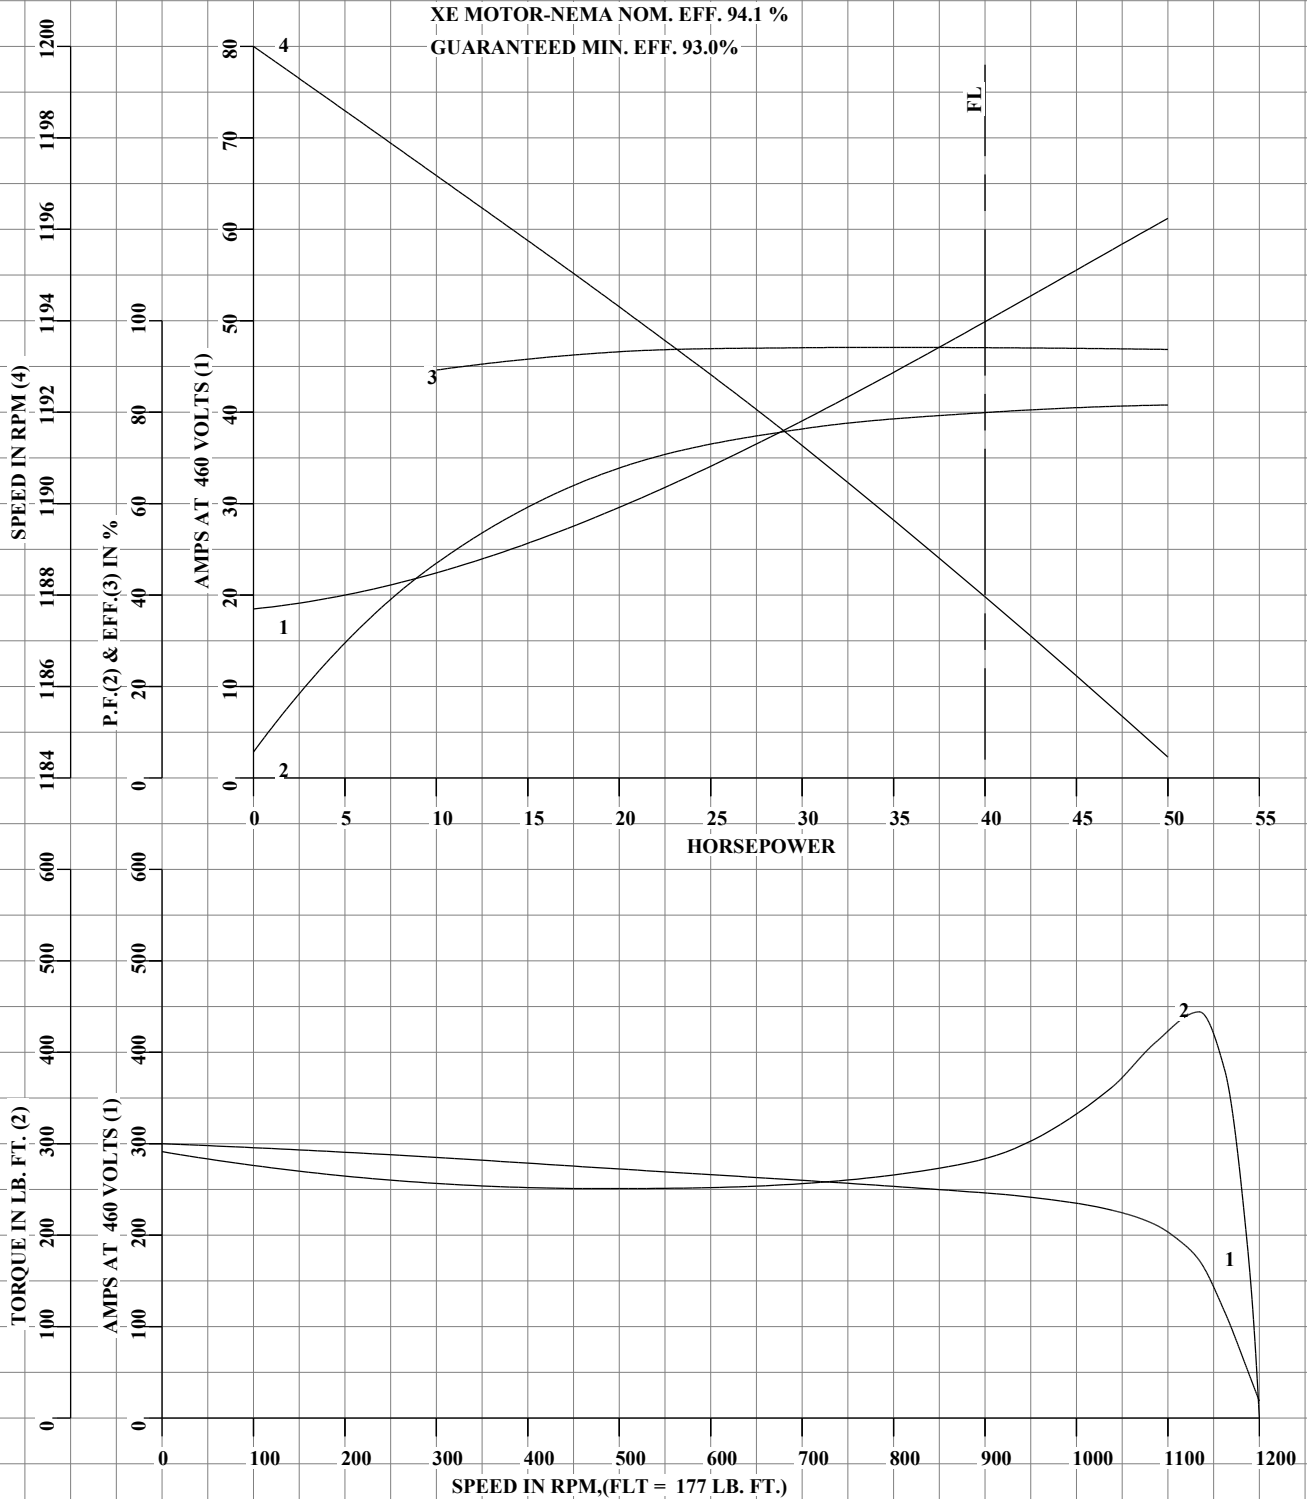

AMPERES SHOWN FOR 230/460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.



DRAWN BY: T.G. KELATI
CHECKED BY: D. H. MAY
APPROVED BY: E.J. CHRISTIAN
DATE: 10/12/06

AC MOTOR
PERFORMANCE
DATA

A36WG1194-R015

ISSUE DATE 01/24/25

FRAME 364T

VOLTS 230/460

NEMA DESIGN B

TEST S.O. TYPICAL DATA

HP 40

AMPS 99.6/49.8

CODE LETTER G

TEST DATE ---

TYPE P

DUTY CONT

ENCLOSURE TEFC


STATOR RES. @ 25°C .0373/.149

PHASE / HERTZ 3/60

AMB °C / INSUL 40/F

E/S 491378

OHMS (BETWEEN LINES)

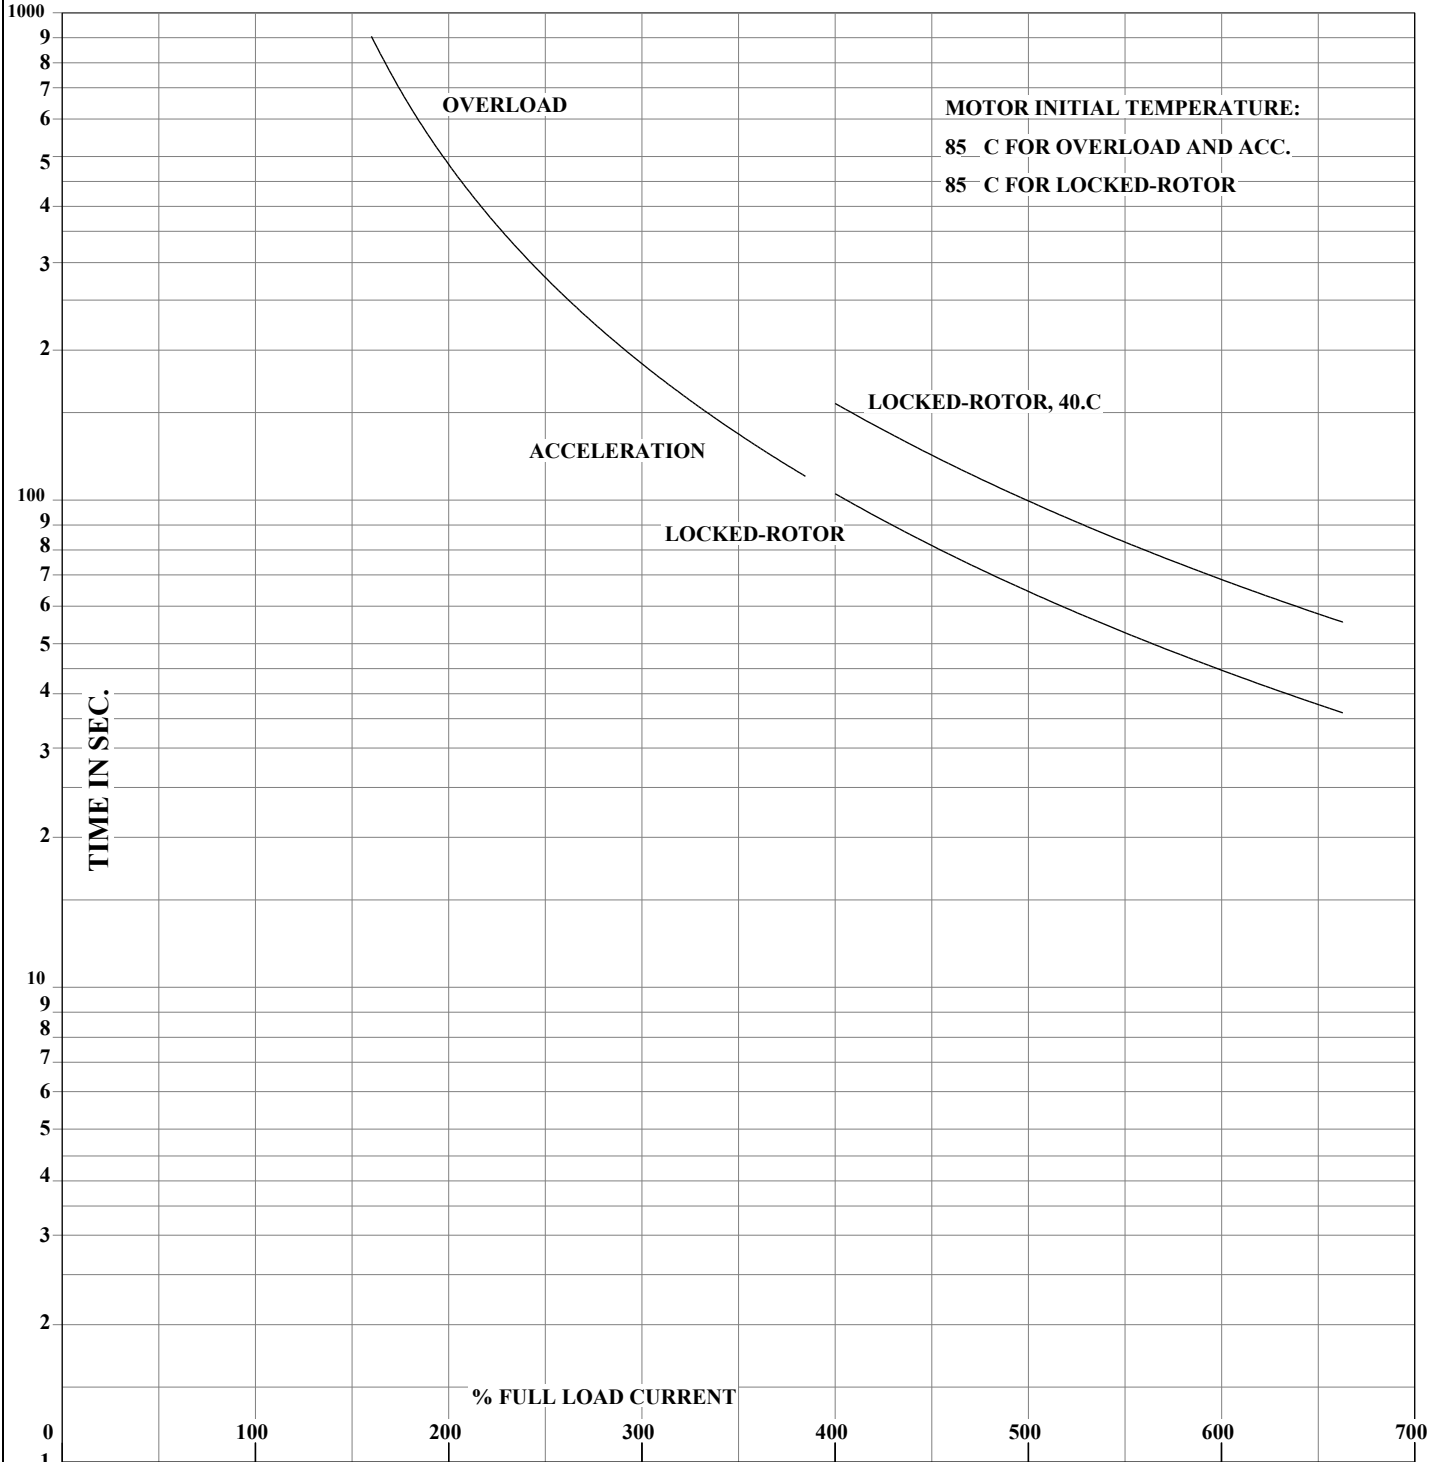

THERMAL LIMIT CURVE
XE MOTOR-NEMA NOM. EFF. 94.1 %

AMPERES SHOWN FOR 230/460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.




DRAWN BY: T.G. KELATI
CHECKED BY: D. H. MAY
APPROVED BY: E.J. CHRISTIAN
DATE: 10/12/06

AC MOTOR
PERFORMANCE
DATA

A36WG1194-R015

ISSUE DATE 01/24/25

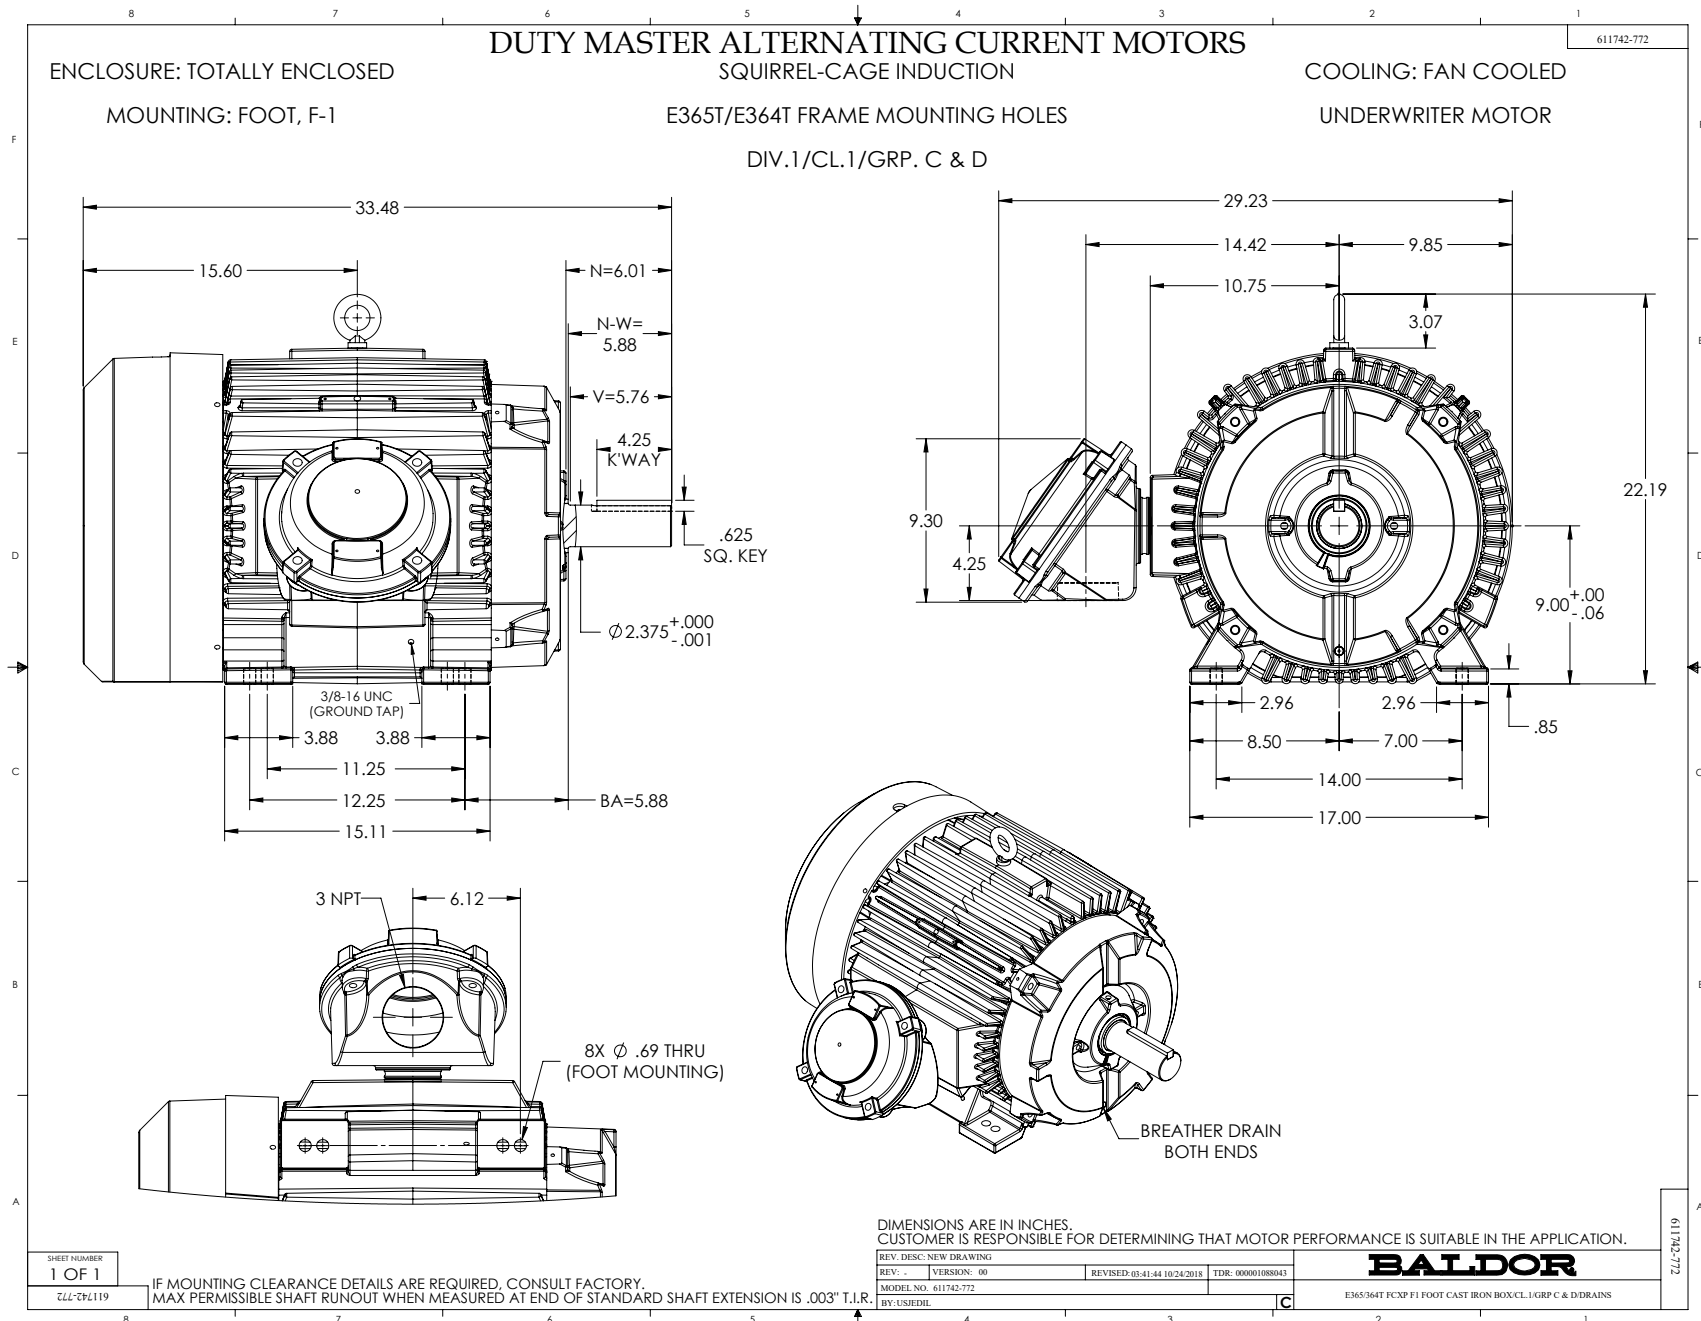

CONNECTION DIAGRAM
ACCESSORIES

MOTOR WINDING THERMOSTATS		
CONTACTS _____ @ _____ °C		
FIGURE NUMBER _____		
CONTACT RATING		
VOLTS	CONTINUOUS AMPERES	INRUSH AMPERES
110-120	3.0	30
220-240	1.5	15
440-480	0.75	7.5
550-600	0.60	6.0



THERMOSTATS	
NORMALLY CLOSED	NORMALLY OPEN
FIGURE 1	FIGURE 4
FIGURE 2	FIGURE 5
FIGURE 3	FIGURE 6
FIGURE 7	FIGURE 8

CUSTOMER _____ CUSTOMER ORDER NO. _____ S.O. NO. _____

REV. DESC: LOADED TO BUS		
REV. LTR: A	VERSION: 01	TDR: 000000570390
FILE: \RAG\00013\849	REVISED: 10:16:21 12/07/2010	BY: RAGDRF
MTL: -		

416820-002

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 9 LEAD DELTA-CONNECTED

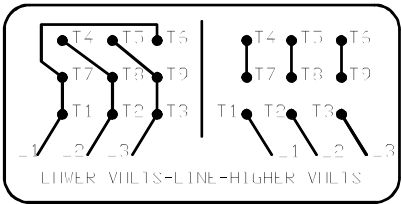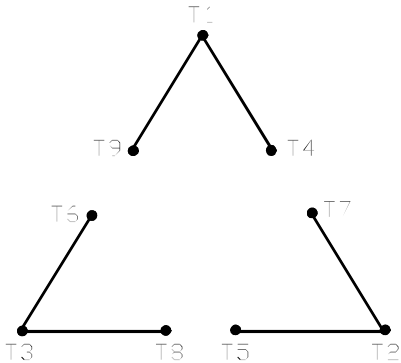

(N.P. 1575-B)

REV. DESC: FONT CHANGE FOR PDF SEARCHABLE		
REV. LTR: A	VERSION: 01	TDR: 000001009382
FILE: \MGA\00000\661	REVISED: 02:46:19 02/13/2020	BY: MGHMTT
MTL: —		

BALDOR - RELIANCE®

CONN DIAG — STANDARD 9 LEAD, DELTA-CONNECTED
SH 1 of 1

416820-002