

ABB BALDOR RELIANCE III

Customer information packet

DRX441264T

125HP, 1190RPM, 3PH, 60HZ, 445T, TEFC, F1

Class - CLI GP C,D

Division - Division I

Specifications

Enclosure	TEFC
Frame	445T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP C,D
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	125.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	UL CSA CCSAUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Constant Torque Speed Range	10-60
Current @ Voltage	144.000 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	95.0 %
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	144.0 a
Insulation Class	F
Inverter Code	Inverter Ready
IP Rating	NONE
KVA Code	G

Part Detail

Revision	A
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A44WG2120
Layout	617426-001
Eff. date	05-06-2024
CD Diagram	416820-036
Poles	06
Leads	3#1
Proprietary	False
Created date	03-11-2019

Max Speed	2700 rpm
Motor Lead Quantity/Wire Size	3 @ 1 AWG
Motor Standards	NEMA
Motor Type	A44076M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	44.97 IN
Power Factor	86
Product Family	General Industrial
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	3.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1190 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat

Nameplate

NP2496L	
MOBIL POLYREX EM	

000613006PC		
CLASS I GROUP	C D X	NO.
CLASS II GROUP	X X X	
OPERATING TEMP CODE	T3C	

NP3140L

SPEC NO.	A44-9130-2120			CAT.NO.	DRX441264T					FRAME	445T
HP	125	VOLTS	460	PHASE	3	DESIGN	B	TYPE	P		
RPM	1190	AMPS	144	HZ	60	AMB	40	SF	1.00		
DRIVE END BEARING	90BC03J30X		DUTY	CONT	INSUL.CLASS		F				
OPP D.E. BEARING	90BC03J30X		ENCL	TEFC	CODE	G					
SF	1.15	WK2	59.4	MAG CUR	51.4	RPM MAX		2700			
CT HZ	10-60	VT HZ	0-60	CHP HZ	60-90	NEMA-NOM-EFF			95		
	SUIT FOR 55C AMB AT 1.00 SF					IP55					
SER.NO.				MOTOR WEIGHT							

Parts List

Part number	Description	Quantity
SA367565	SA A44-9130-2120	1.000 ea
RA357033	RA A44-9130-2120	1.000 ea
421948051	LABEL, MYLAR	1.000 ea
NP2496L	MOTOR LUBE NAMEPLATE	1.000 ea
000692000VD	LABEL WARNING	1.000 ea
LB1073	ALUM XP CAUTION LABEL	1.000 ea
000613006PC	N/P U/L (REL QTY 500)	1.000 ea
NP3140L	INVERTER DUTY, SS, CC, CSA-C US, CSA EEV	1.000 ea
HW4505A02	BREATHING/DRAIN-EXP PROOF-.250-18 PTF AIS	2.000 ea
609158001D	SLGR - 440	1.000 ea
603284001W	SLGN - 449	1.000 ea
089448117B	G28 X/P FT MNT ODE BRKT MCHG 6318	1.000 ea
415072001B	CLAMP	1.000 ea
083199082A	G28 FAN COVER MACHINING SHORT VERSION	1.000 ea
034180014GA	KEY 1/2X1/2X1-3/4 L	1.000 ea
078557001E	FAN 440 078557001F	1.000 ea
004824015A	GREASE POLYREX EM	1.160 lb
032130024HB	HSHCS 1-8X3" PLATED	4.000 ea
032018008CK	HHCS 3/8-16X1L PLATED	4.000 ea
032018028DK	HHCS 1/2-13X3-1/2 PLTD.	3.000 ea
034630002AB	CPLG 1/4" PLATED	1.000 ea
415096002A	CPLG 1/8 HEX TYPE	1.000 ea
415045002A	SLGR	1.000 ea
410700004A	WSHR	1.000 ea
035000001G	GREASE RELIEF FITTING, ALEMITE 317400	1.000 ea
034017014AB	LCKW 3/8 STD. PLATED	4.000 ea
034530064BB	P/NIP 1/4X8 PLATED	1.000 ea
034530064AB	P/NIP 1/8 X 8" L Pipe Nipple	1.000 ea
034600001AA	BUSH 1/4TO1/8 BLACK	1.000 ea
702623018B	BRKT MOUNTED G28 XP T-BARRIER - 6318 BRG	1.000 ea
032018006BK	HHCS 5/16-18X3/4 PLATED	3.000 ea

034017013AB	LCKW 5/16 STD. PLATED	3.000 ea
034600001AA	BUSH 1/4TO1/8 BLACK	1.000 ea
089448117A	G28 X/P FT MNT DE BRKT MCHG 6318	1.000 ea
032018028DK	HHCS 1/2-13X3-1/2 PLTD.	3.000 ea
415045002A	SLGR	1.000 ea
034017016AB	LCKW 1/2" PLATED	3.000 ea
034530044AB	P/NIP 1/8X5-1/2L GALV.	1.000 ea
415096002A	CPLG 1/8 HEX TYPE	1.000 ea
032130024HB	HSHCS 1-8X3" PLATED	4.000 ea
035000001G	GREASE RELIEF FITTING, ALEMITE 317400	1.000 ea
18CB1004A01	STD CONDUIT BOX 444-449T 318 EXPL PROOF	1.000 ea
18CB1504A01	STD CONDUIT BOX LID 444-449T 318 EXPL PR	1.000 ea
418150003A	GREASE FITTING CAP	1.000 ea
034017018AB	5/8 MED LOCK WASHER ZP (034017018AF)	10.000 ea
034017018AB	5/8 MED LOCK WASHER ZP (034017018AF)	4.000 ea
035000001A	ALFTG 1/8" 1610-BL	1.000 ea
032130016EB	HSHCS 5/8-11X2 PLTD.	10.000 ea
415000115H	T/LUG #2AWG-4/0AWG	1.000 ea
406099000A	PLUG - FAN COVER 320-440	1.000 ea
032018008DK	HHCS 1/2-13X1 PLATED	1.000 ea
034017016AB	LCKW 1/2" PLATED	1.000 ea
032130020EB	HSHCS 5/8-11X2-1/2PLTD.	4.000 ea
035000001A	ALFTG 1/8" 1610-BL	1.000 ea
418150003A	GREASE FITTING CAP	1.000 ea
MG1025G29	WILKOFAS, 789.229, DARK CHARCOAL GRAY	0.440 ga
033775004EA	DRSCR #6-1/4 304 S.S.	2.000 ea
034180054KA	7/8 SQ X 6.75 KEY	1.000 ea
604797045	STD. 400 FRAME SKID	1.000 ea
032510024D	CARRIAGE BOLT - 444	2.000 ea
034001016AB	WSHR .562ID 1.375OD .109	2.000 ea
034001014AB	FLAT WASHER 3/8"PLATED	2.000 ea
033300014AC	HEX NUT, SHIPPING - 400	2.000 ea
604799003C	PLASTIC BAG 42X32X46	1.000 ea

REL. S.O.	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	445T	125	P	3/60	1190	460
AMPS	DUTY	AMB °C/ INSUL.	S.F.	NEMA DESIGN	CODE LETTER	ENCL.
144	CONT	40/F	1.15	B	G	TEFC
E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)		
599769	418143-080-GE	---	---	.0408		
PERFORMANCE						
LOAD	HP	AMPERES	RPM	% POWER FACTOR	% EFFICIENCY	
NO LOAD	0	51.4	1200	4.76	0	
1/4	31.3	61.8	1197	51.7	91.6	
2/4	62.5	84.2	1195	73.5	94.6	
3/4	93.7	112	1192	82.2	95.1	
4/4	125	144	1189	85.8	95.0	
5/4	156	178	1185	87.1	94.5	
SPEED TORQUE						
		RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES	
LOCKED ROTOR		0	141	777	911	
PULL UP		180	127	701	893	
BREAKDOWN		1143	277	1528	513	
FULL LOAD		1189	100	552	144	
AMPERES SHOWN FOR 460. VOLT CONNECTION. IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE REMARKS: TYPICAL DATA XE - MOTOR; NEMA NOM. EFF.= 95.0 PCT.; GUAR MIN . EFF.= 94.1 PCT.						
			DR. BY M.C. BENTON CK. BY S.E. WALLACE APP. BY E.J. CHRISTIAN DATE 04/09/90	A-C MOTOR PERFORMANCE DATA	A44WG2120-R032 ISSUE DATE 04/30/21	Page 9 of 15

REL S.O.

 RPM **1190**

 S.F. **1.15**

 ROTOR **418143-080-GE**

 FRAME **445T**

 VOLTS **460**

 NEMA DESIGN **B**

 TEST S.O. **TYPICAL DATA**

 HP **125**

 AMPS **144**

 CODE LETTER **G**

 TEST DATE **---**

 TYPE **P**

 DUTY **CONT**

 ENCLOSURE **TEFC**


 STATOR RES. @ 25 °C **.0408**

 PHASE/HERTZ **3/60**

 AMB °C/INSUL **40/F**

 E/S **599769**

OHMS (BETWEEN LINES)

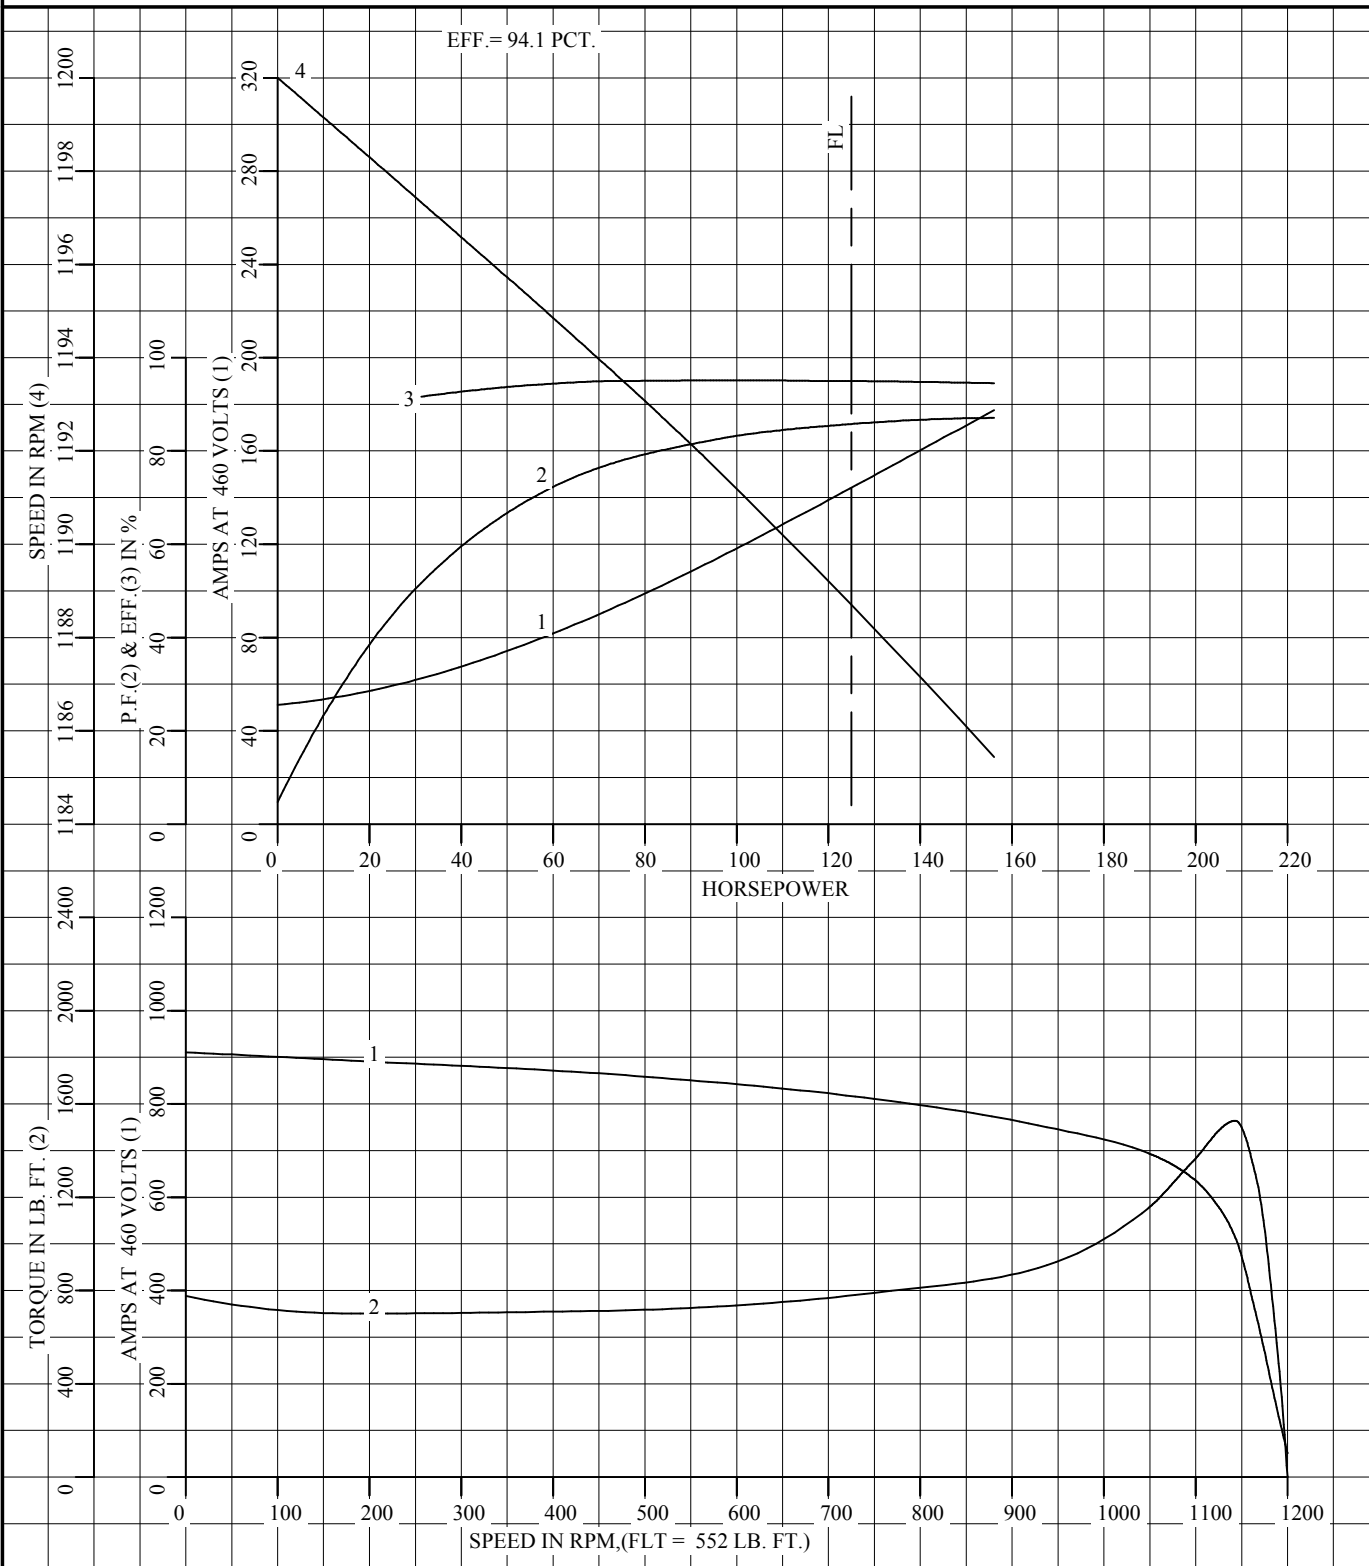

AMPERES SHOWN FOR 460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

BALDOR
A MEMBER OF THE ABB GROUP

DR. BY M.C. BENTON
CK. BY S.E. WALLACE
APP. BY E.J. CHRISTIAN
DATE 04/09/90

**A-C MOTOR
PERFORMANCE
CURVES**

A44WG2120-R032

ISSUE DATE 04/30/21

REL. S.O.

 RPM **1190**

 S.F. **1.15**

 ROTOR **418143-080-GE**

 FRAME **445T**

 VOLTS **460**

 NEMA DESIGN **B**

 TEST S.O. **TYPICAL DATA**

 HP **125**

 AMPS **144**

 CODE LETTER **G**

 TEST DATE **---**

 TYPE **P**

 DUTY **CONT**

 ENCLOSURE **TEFC**


 STATOR RES. @ 25 °C **.0408**

 PHASE/HERTZ **3/60**

 AMB °C/INSUL **40/F**

 E/S **599769**

OHMS (BETWEEN LINES)

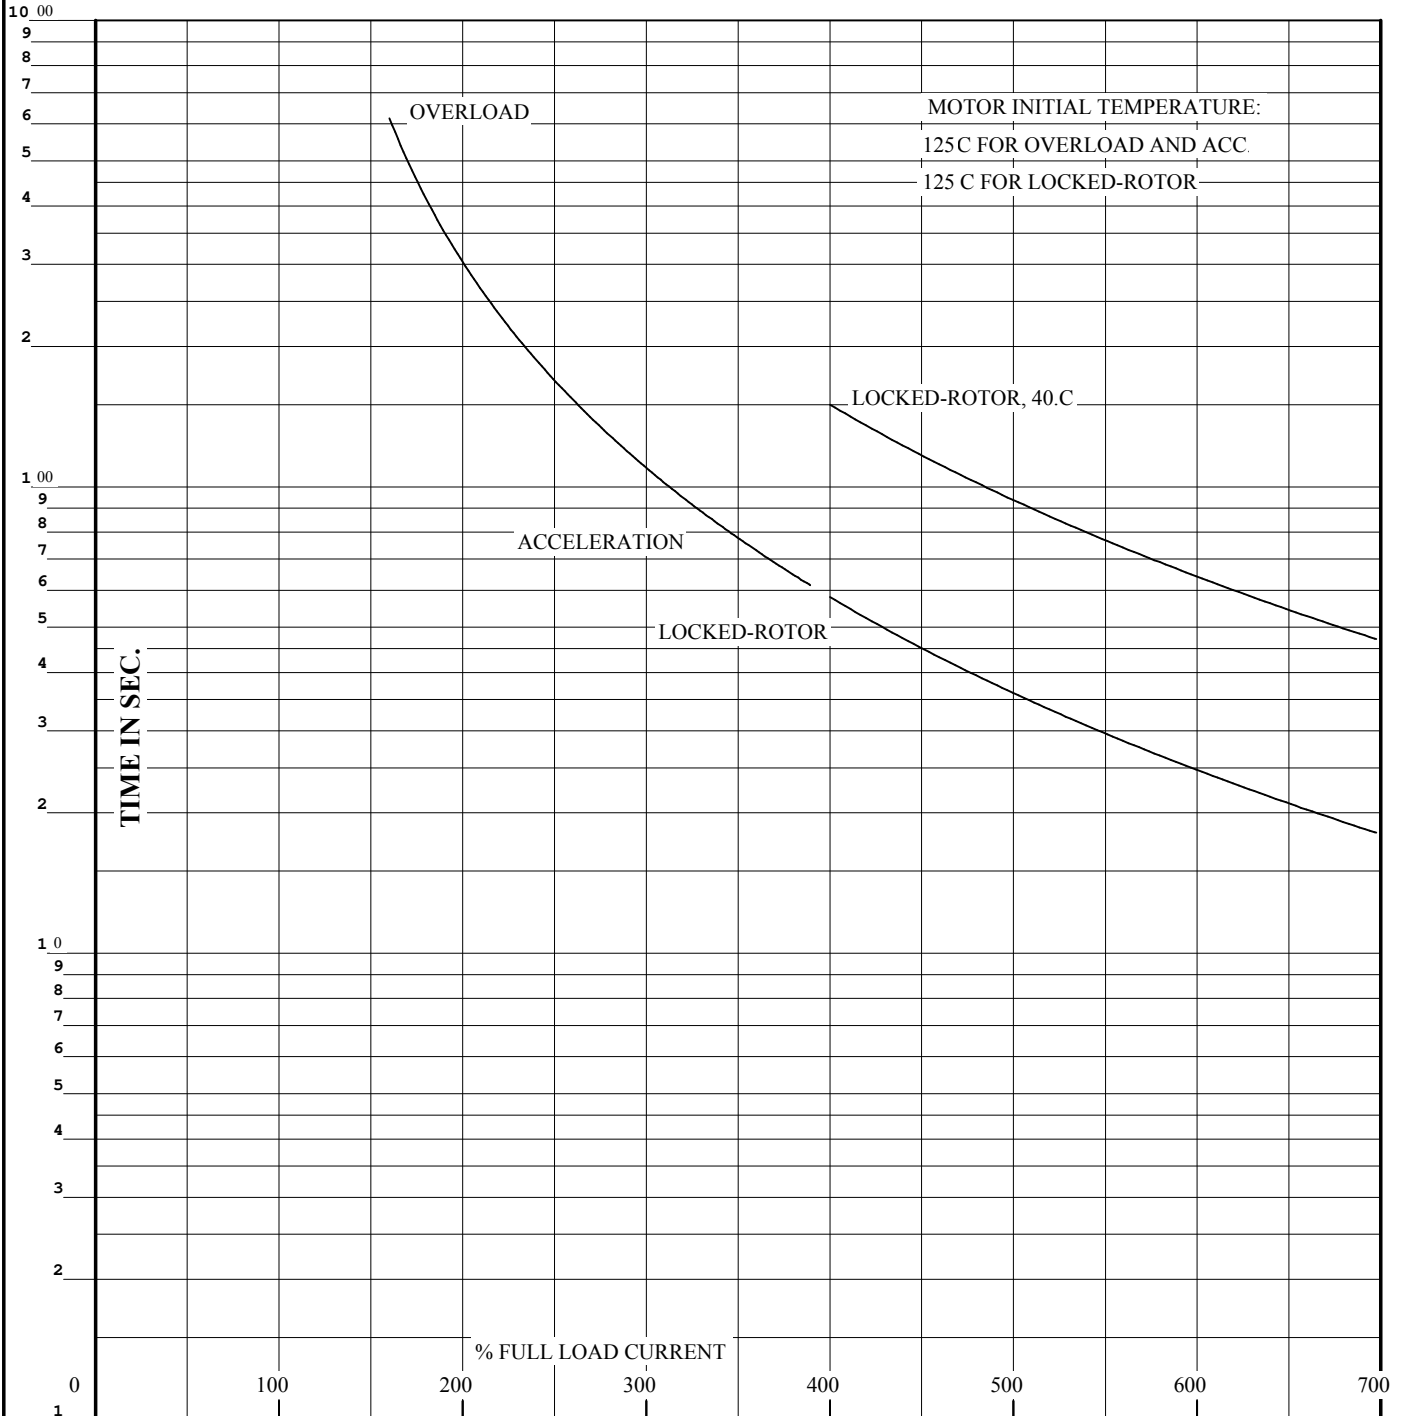

THERMAL LIMIT CURVE

REMARKS:


EFF.= 94.1 PCT. T CURVE


 AMPERES SHOWN FOR 460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

BALDOR
A MEMBER OF THE ABB GROUP

 DR. BY M.C. BENTON
 CK. BY S.E. WALLACE
 APP. BY E.J. CHRISTIAN
 DATE 04/09/90
**A-C MOTOR
PERFORMANCE
CURVES**
A44WG2120-R032


 ISSUE DATE 04/30/21 Page 11 of 15

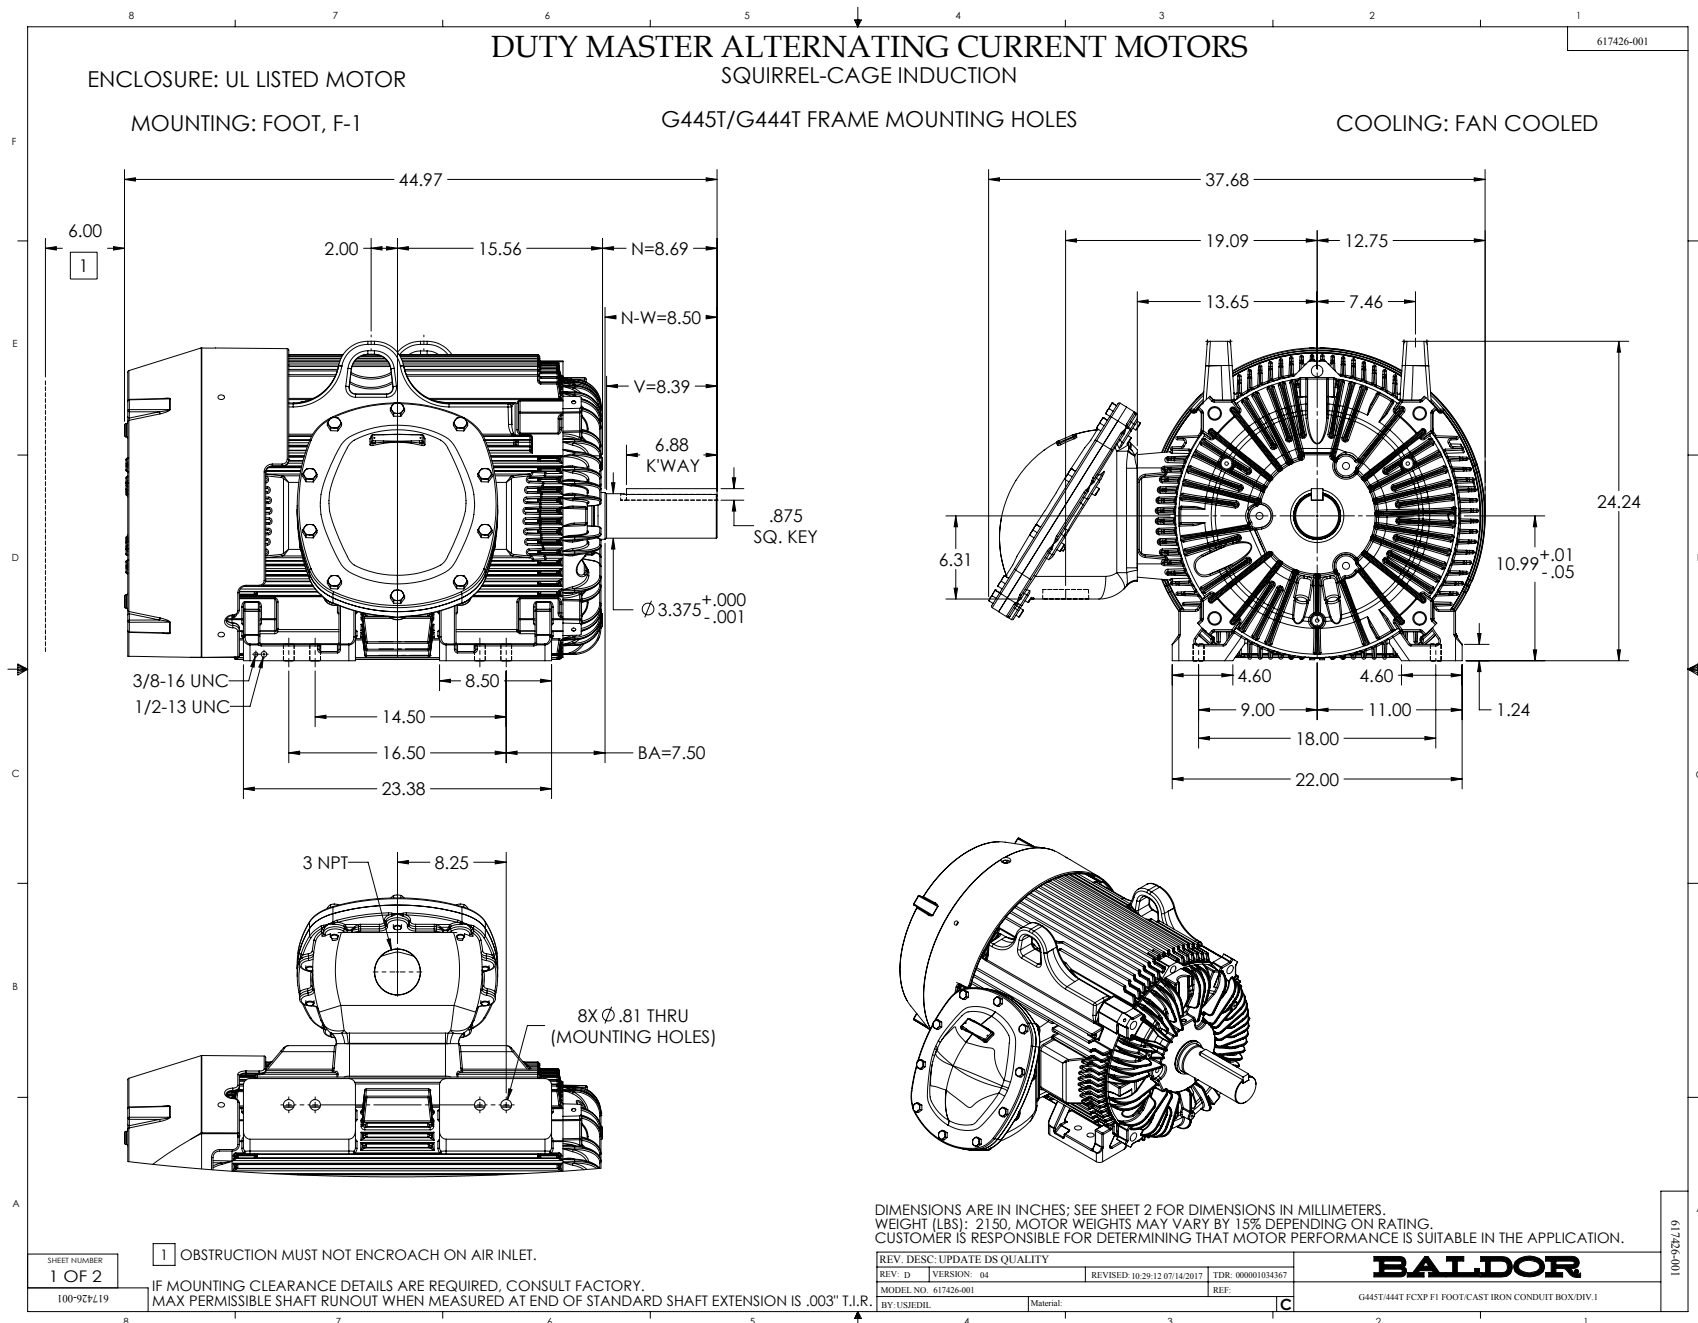

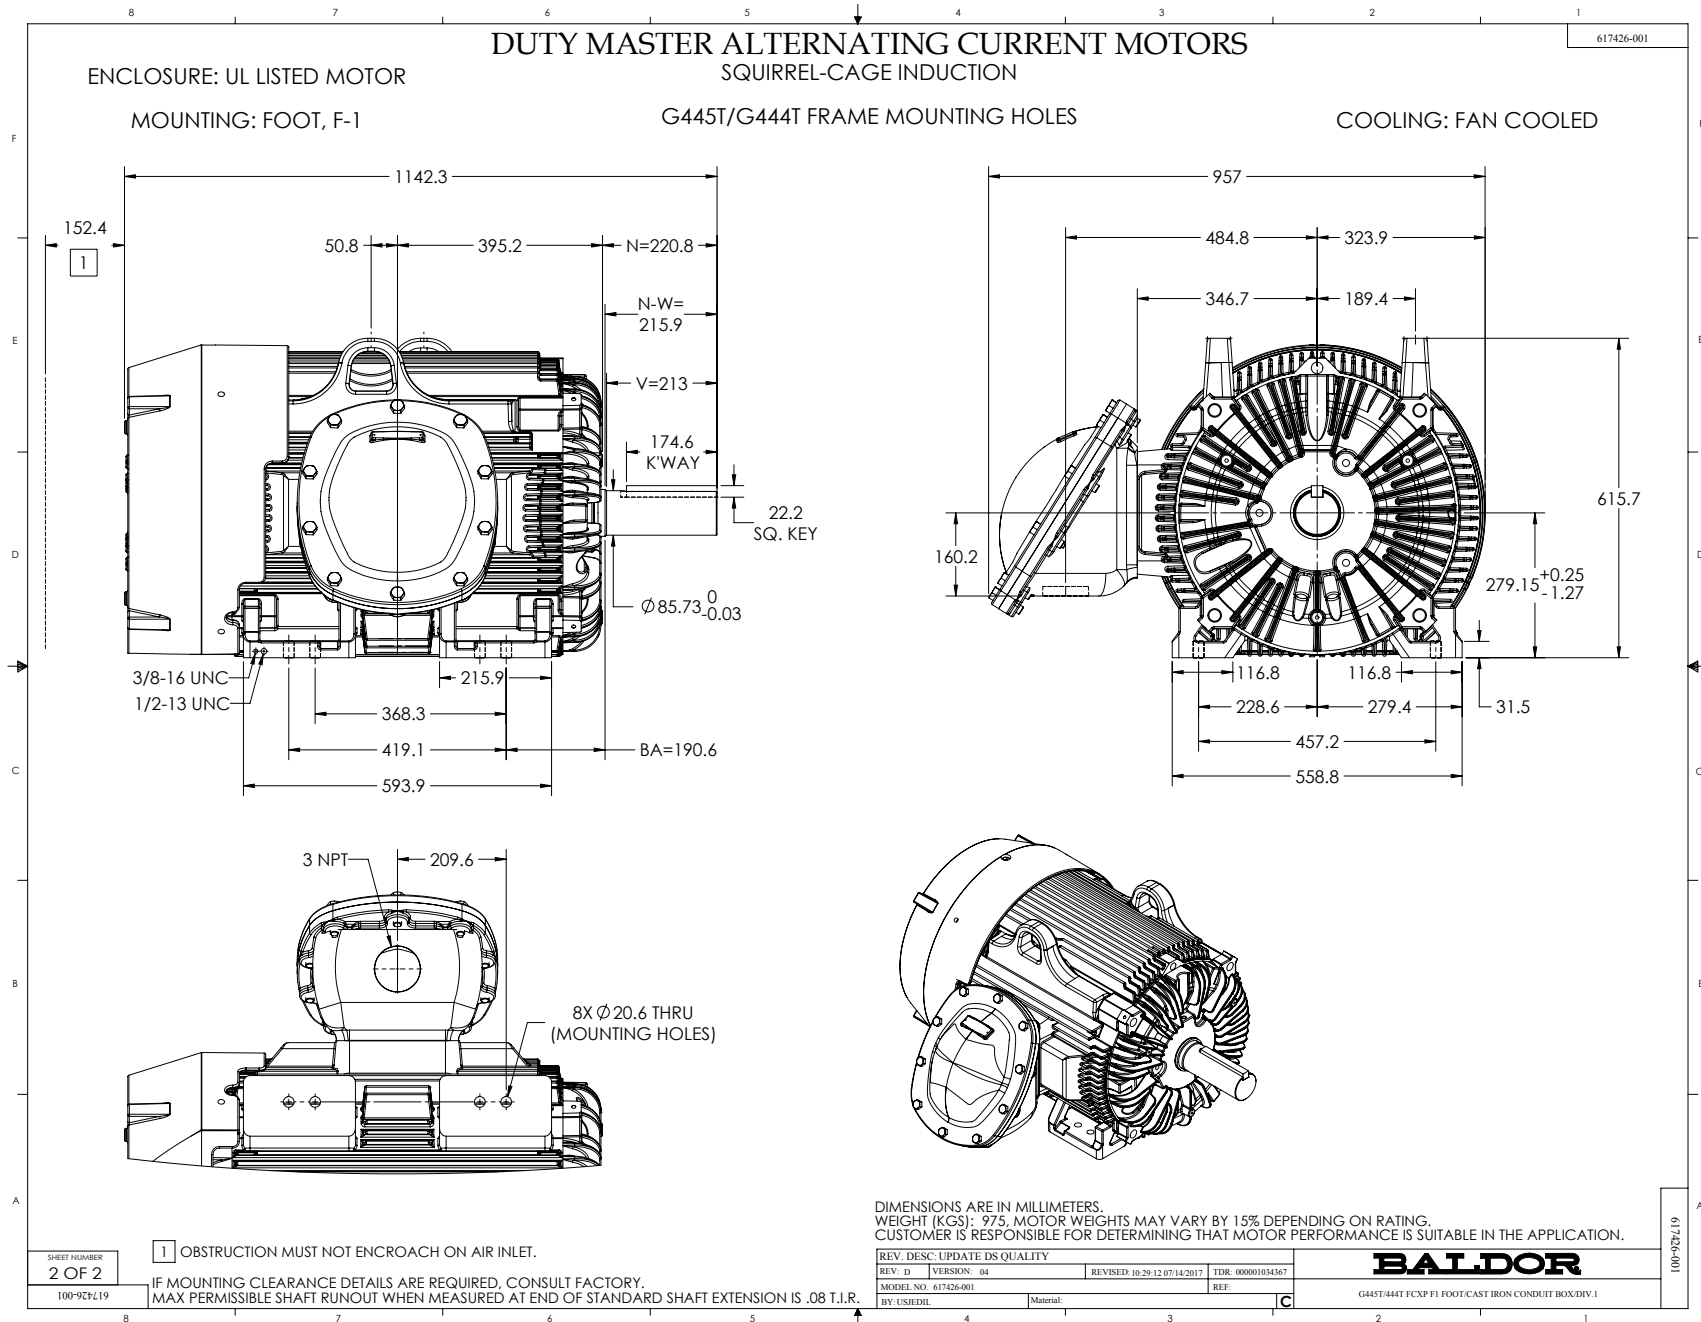

416820-036

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 3 LEAD CONNECTED

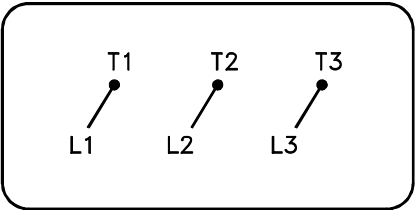

(N.P. 1575-BA)

416820-036

REV. DESC: LOADED TO BUS, C/R 335225		
REV. LTR: -	VERSION: 00	TDR: 000000538207
FILE: \MGA\00000\682	REVISED: 11: 54: 06 04/30/2010	
MTL: -	BY: RAGRA	

BALDOR

CONN DIAG - STANDARD 3 LEAD
SH 1 of 1

CONNECTION DIAGRAM
ACCESSORIES

MOTOR WINDING THERMOSTATS		
CONTACTS	_____ @ _____ ° C	
FIGURE NUMBER	_____	
CONTACT RATING		
VOLTS	CONTINUOUS AMPERES	INRUSH AMPERES
110-120	3. 0	30
220-240	1. 5	15
440-480	0. 75	7. 5
550-600	0. 60	6. 0

THERMOSTATS	
NORMALLY CLOSED	NORMALLY OPEN
FIGURE 1	FIGURE 4
FIGURE 2	FIGURE 5
FIGURE 3	FIGURE 6
FIGURE 7	FIGURE 8

CUSTOMER _____ CUSTOMER ORDER NO. _____ S.O. NO. _____

REV. DESC: LOADED TO BUS		
REV. LTR: A	VERSION: 01	TDR: 000000570390
FILE: \RAG\00013\849	REVISED: 10:16:21 12/07/2010	BY: RAGDRF
MTL: -		

BALDOR

A-C MOTOR CONNECTION ACCESSORIES

SH 1 of 1

418174-006

418174-006