

ABB BALDOR RELIANCE III

Customer information packet

ECP4316T-5

75HP, 1780RPM, 3PH, 60HZ, 365T, A36070M, TEFC

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	365T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	75.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Constant Torque Speed Range	30-60
Current @ Voltage	69.000 A @ 575.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	95.4 %
Enclosure Modification	841
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3
Heater Indicator	No Heater
High Voltage Full Load Amps	69.0 a
Insulation Class	F
Inverter Code	Inverter Ready

Part Detail

Revision	AA
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A36WG4078
Layout	617428-034
Eff. date	02-13-2025
CD Diagram	416820-036
Poles	04
Leads	3#4
Proprietary	False
Created date	10-19-2010

KVA Code	G
Lifting Lugs	No Lifting Lugs
Max Speed	2700 rpm
Motor Lead Quantity/Wire Size	3 @ 4 AWG
Motor Standards	NEMA
Motor Type	A36070M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	33.49 IN
Power Factor	86
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	2.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1780 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate

NP4033LUA																		
CAT #		ECP4316T-5				SER				CC								
SPEC		P36G3424				RATING		40C AMB-CONT										
HZ		VOLTS		AMPS		RPM		HP	CODE	G	SF	DES	PF	NEMA NOM. EFF				
60		575		69		1780		75	G		1.15	B	86	%	95.4	%		
													%			%		
PH	3	CL	F	MAX RPM		2700	MAX CORR KVAR			16								
BRG		DE	6313		ODE	6313		ENCL	TEFC	FR	365T		IP	55				
GREASE		POLYREX EM								MTR WT		930	LBS					
CL I DIV 2 GRPS A,B,C,D				CL I ZONE 2 GRPS				IIA,IIB,IIC				TEMP T		200	C			
INV READY		CT	15-60		HZ	4:1		VT	0-60		HZ	1000:1		CHP	60-90		HZ	1.5:1
INV TEMP CL		200	C	USABLE AT		N/A												
SFA 80																		

Parts List

Part number	Description	Quantity
SA209398	SA P36G3424	1.000 ea
RA196659	RA P36G3424	1.000 ea
NP4033LUA	SS SUPER-E SD XEX, CLI DIV2, CURUS-EEV,	1.000 ea
000692000VD	LABEL WARNING	1.000 ea
004824015A	GREASE POLYREX EM	0.544 lb
032018008AK	HHCS 1/4-20X1 PLATED	4.000 ea
032018012DK	HHCS 1/2-13X1-1/2 PLTD. 032018012DR	4.000 ea
032018024CK	HHCS 3/8-16X3 PLTD.	3.000 ea
034180012DA	KEY 1X4X1/4X1-1/2 L	1.000 ea
032018012DK	HHCS 1/2-13X1-1/2 PLTD. 032018012DR	4.000 ea
032018024CK	HHCS 3/8-16X3 PLTD.	3.000 ea
034530052AB	P/NIP 1/8X6-1/2 Zinc	1.000 ea
034690002AB	PPLG 1/4" PLTD.	1.000 ea
078559001A	+FANCV - 360	1.000 ea
085922073B	BRKT 360 085922072WCC KB	1.000 ea
410700004F	WSHR	1.000 ea
415045002E	SLGR	1.000 ea
415072001B	CLAMP	1.000 ea
415096002A	CPLG 1/8 HEX TYPE	1.000 ea
412118006A	DRAIN	1.000 ea
702676001C	FAN 360	1.000 ea
034690002AB	PPLG 1/4" PLTD.	1.000 ea
085922073B	BRKT 360 085922072WCC KB	1.000 ea
415045002E	SLGR	1.000 ea
415096002A	CPLG 1/8 HEX TYPE	1.000 ea
412118006A	DRAIN	1.000 ea
032018010CK	HHCS 3/8-16X1-1/4 PLTD. 032018010CR	4.000 ea
033512008LB	HHTTS 1/4-20X1 PLATED	4.000 ea
034000014AB	WSH ID.406 OD.812 TH.065	4.000 ea
035000001A	ALFTG 1/8" 1610-BL	1.000 ea
035000001A	ALFTG 1/8" 1610-BL	1.000 ea

065776000C	GASKET,MAIN CBOX, 320-400	1.000 ea
067053000B	GASK 320-400	1.000 ea
076708000BB	CONDUIT BOX-360	1.000 ea
076709000A	C/B Cover - 360	1.000 ea
406099000A	PLUG - FAN COVER 320-440	1.000 ea
415000115H	T/LUG #2AWG-4/0AWG	1.000 ea
418150003A	GREASE FITTING CAP	1.000 ea
418150003A	GREASE FITTING CAP	1.000 ea
MG1025N19	WILKO 778.50 BLUE GREEN - 55 GAL DRUMS	0.250 ga
033775004EA	DRSCR #6-1/4 304 S.S.	4.000 ea
034530020AB	P/NIP 1/8X2-1/2 PLTED	1.000 ea
034180034HA	KEY 5/8X5/8X4-1/4 L	1.000 ea
421948051	LABEL, MYLAR	1.000 ea
14PA1000	PACKAGING 314 GROUP COMBINED PRINT	1.000 ea
000613006PU	N/P (RELEASE QTY 10,000) UL CSA LABEL	1.000 ea
LB1449	DIV-2/NEC WARNING LABEL	1.000 ea
032018005DL	1/2-13 X 5/8 SILICON BRONZE HHCS	1.000 ea

Motor performance data

Record #71925 - Typical performance - not guaranteed values

Winding	A36WG4078
Type	A3670M
Enclosure	TEFC

Nameplate data

Rated Output	75		
Volts	575		
Full Load Amps	69		
R.P.M.	1780		
Hz	60	Phase	3
KVA Code	G		
S.F.	1.15		
NEMA Nom. Eff.	95.4	Power Factor	86
Duty	CONT		
S.F. Amps			

575 V, 60 Hz:

Single Voltage Motor

Full Load Torque	220 LB-FT
Start Configuration	direct on line
Breakdown Torque	619 LB-FT
Pull-up Torque	339 LB-FT
Locked-rotor Torque	431 LB-FT
Starting Current	437 A
No-load Current	22.31
Line-line Res. @ 25°C	0.14 Ω
Temp. Rise @ Rated Load	61°C
Temp. Rise @ S.F. Load	77°C
Locked-rotor Power Factor	32.1
Rotor inertia	16.2 lb-ft ²

Load Characteristics 575 V, 60 Hz, 75 HP


% of Rated Load	NL	25	50	75	100	125	150	SF
Power Factor	4	54	76	83	86	86	85	86
Efficiency	0	93.7	95.9	95.7	95.4	94.6	93.7	94.8
Speed	1799	1797	1792	1787	1782	1777	1770	1779
Line amperes	22.31	27.39	38.79	53.01	68.52	85.75	105	78.9


SPEED TORQUE / SPEED CURRENT CURVES

BALDOR • RELIANCE

A36WG4078


75HP 575V 60HZ

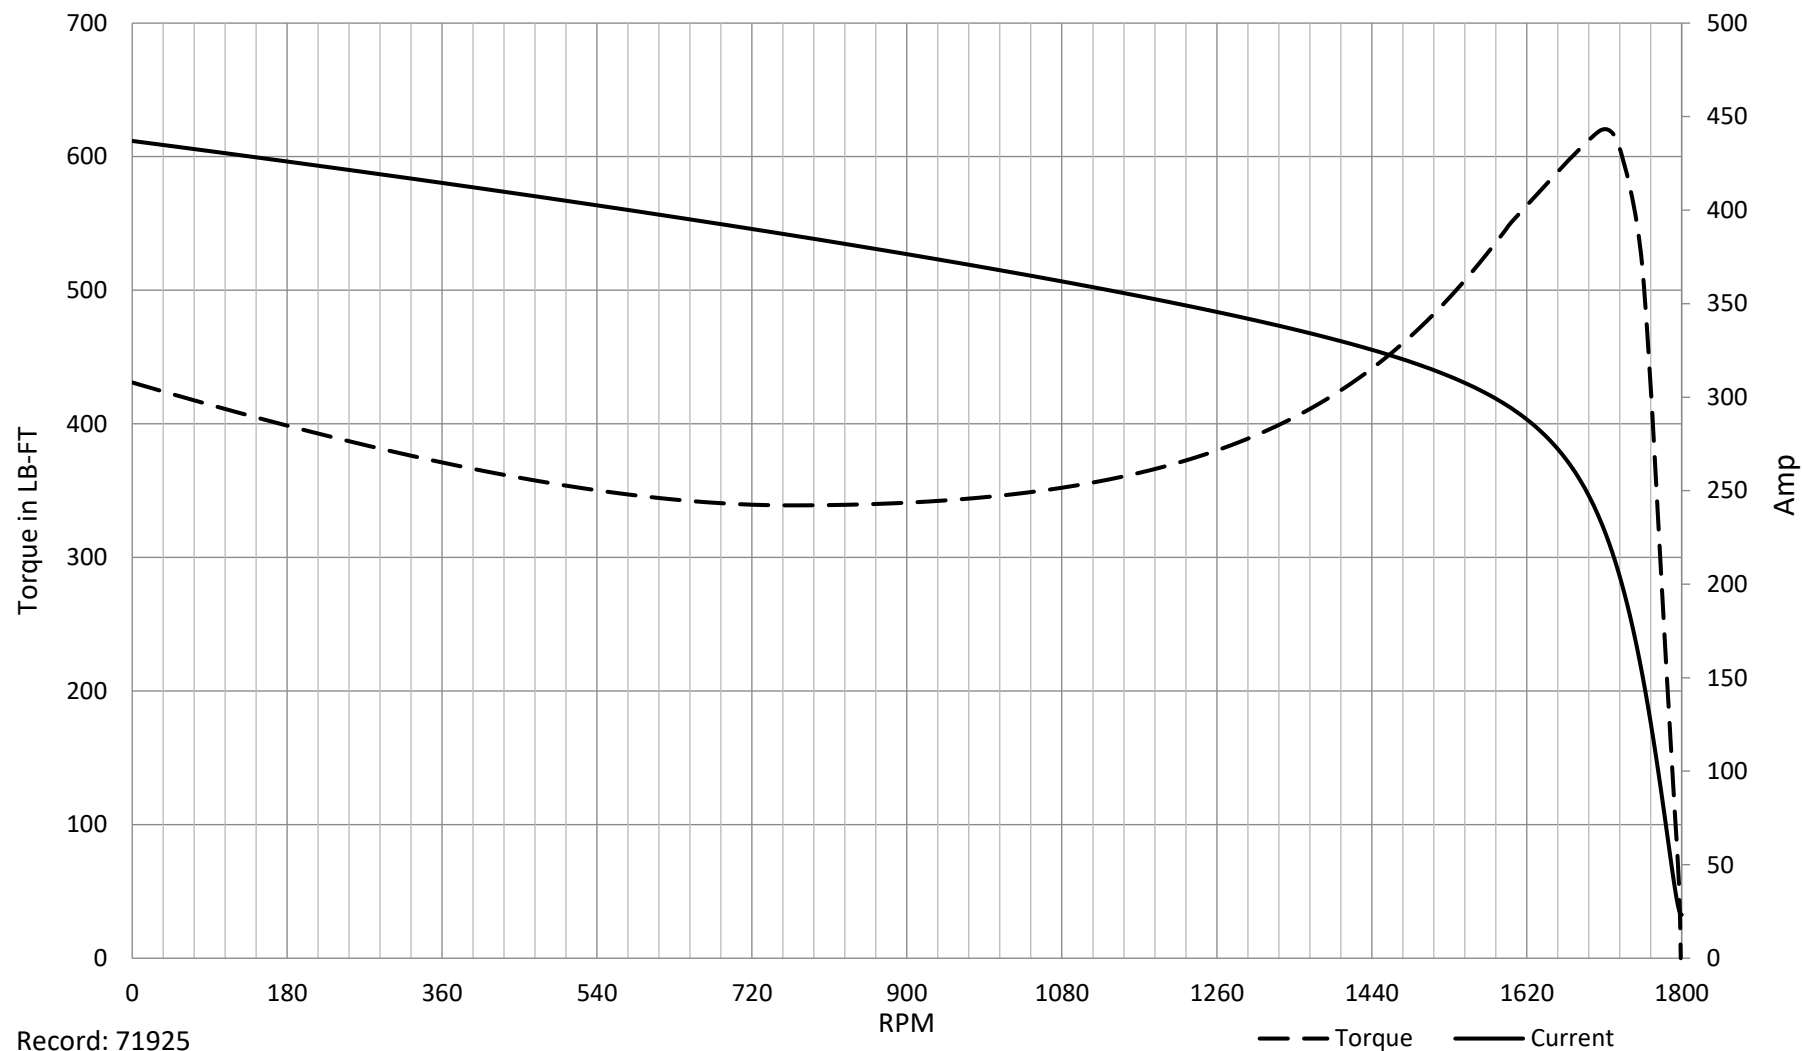

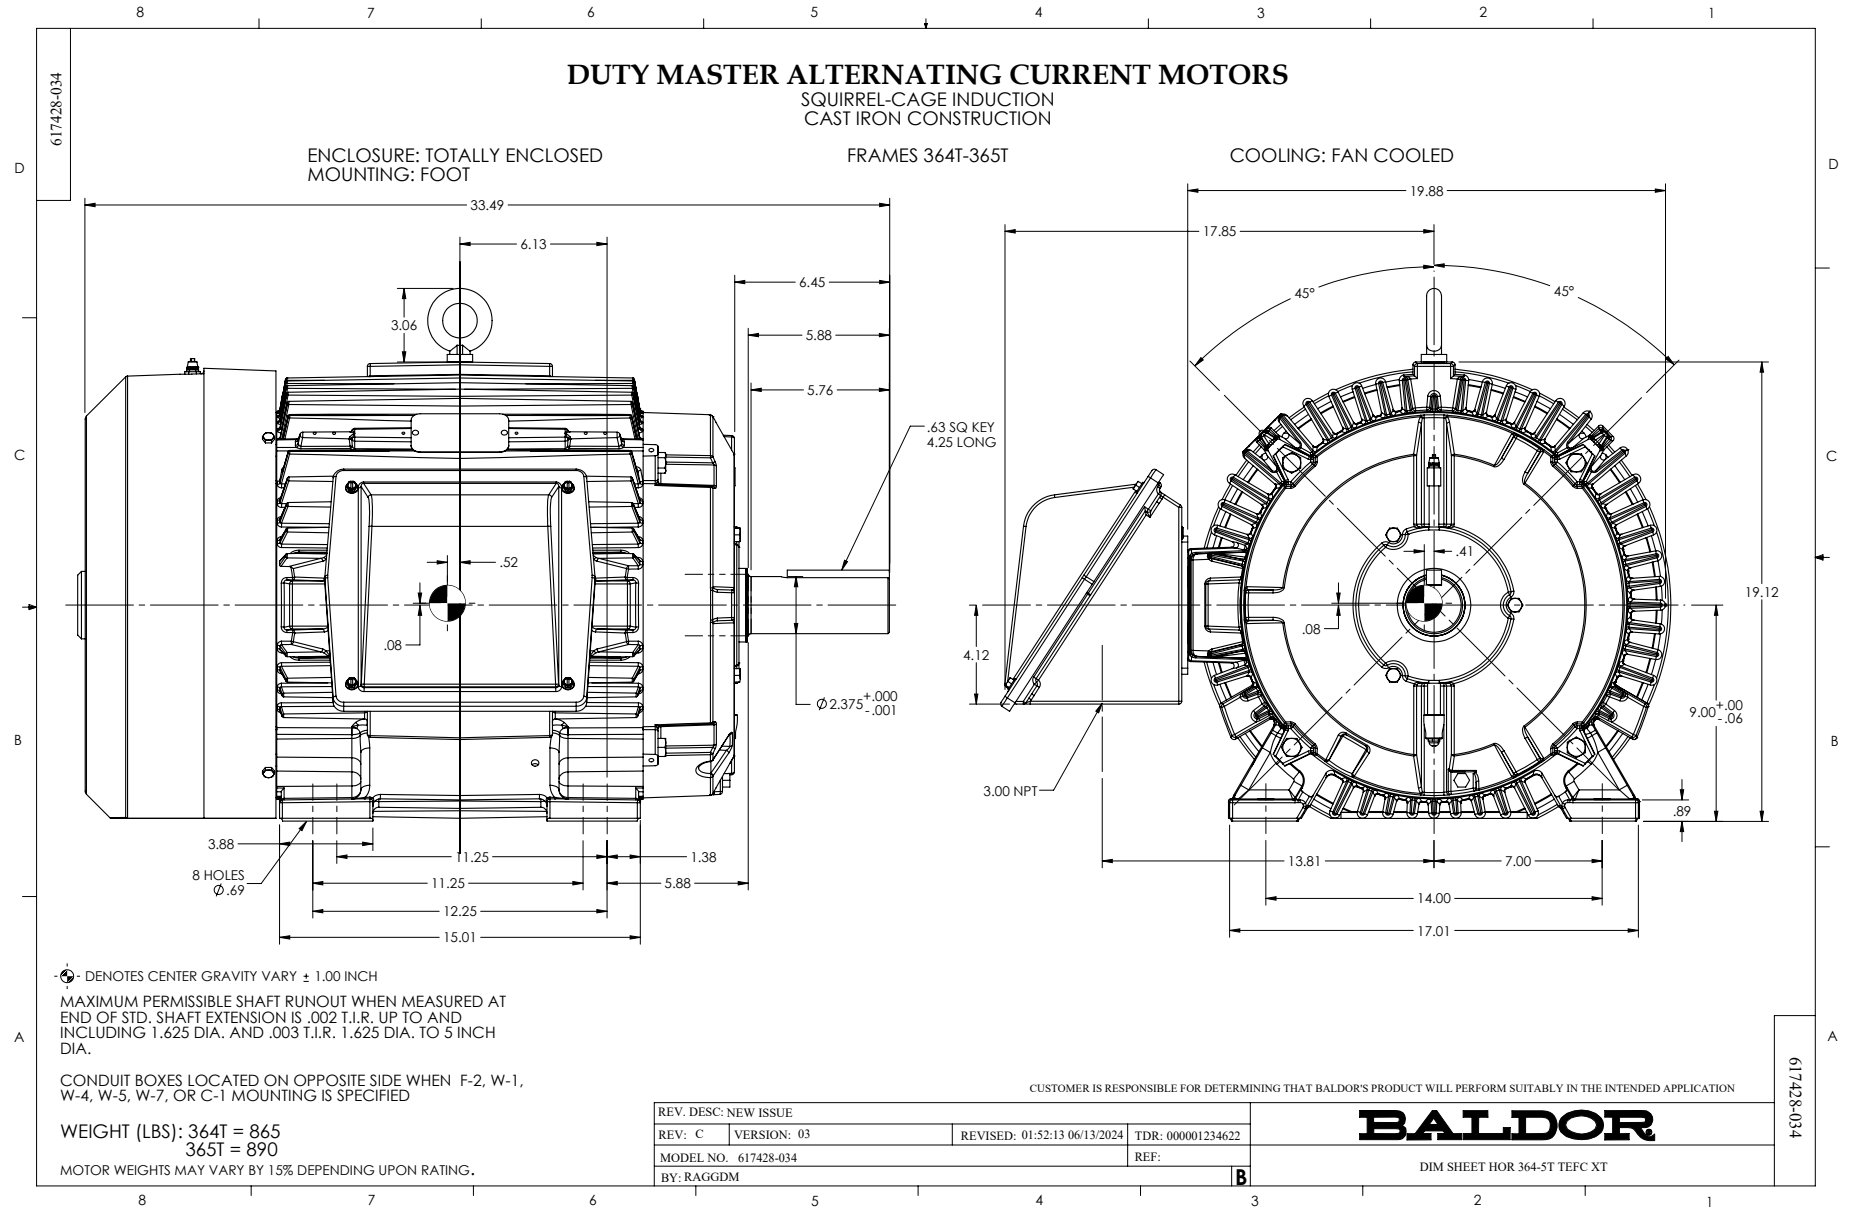

416820-036

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 3 LEAD CONNECTED

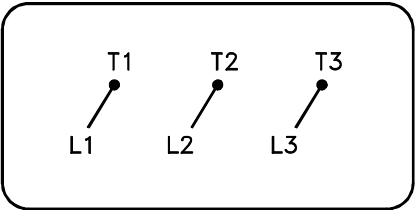

(N.P. 1575-BA)

416820-036

REV. DESC: LOADED TO BUS, C/R 335225		
REV. LTR: -	VERSION: 00	TDR: 000000538207
FILE: \MGA\00000\682		REVISED: 11: 54: 06 04/30/2010
MTL: -		BY: RAGRA

BALDOR

CONN DIAG - STANDARD 3 LEAD
SH 1 of 1