

ABB BALDOR RELIANCE III

Customer information packet

ECP44302T-4

300HP, 3570RPM, 3PH, 60HZ, 449TS, A44128M, TEF

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	449TS
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	300.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Constant Torque Speed Range	30-60
Current @ Voltage	318.000 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	96.2 %
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T2C
Heater Indicator	No Heater
High Voltage Full Load Amps	318.0 a
Insulation Class	F
Inverter Code	Not Inverter
KVA Code	G
Lifting Lugs	No Lifting Lugs
Motor Lead Quantity/Wire Size	6 @ 2/0 AWG

Part Detail

Revision	W
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A44WG1242
Layout	617427-006
Eff. date	03-31-2026
CD Diagram	416820-036
Poles	02
Leads	3#2/0 (02 per group)
Proprietary	False
Created date	08-16-2012

Motor Standards	NEMA
Motor Type	A44128M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	49.71 IN
Power Factor	91
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	2.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3570 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate

NP3238													
CAT NO	ECP44302T-4			SPEC NO.		P44G3953							
HP	300	AMPS	318	VOLTS		460			DESIGN	B			
FRAME	449TS	RPM	3570	HZ	60	AMB	40	SF	1.15				
D.E. BRG.DATA	6313	O.D.E. BRG.DATA			6313	PH	3	DUTY	CONT	INSUL.CLASS	F		
D.E. BRG.	65BC03J30X			TYPE	P	ENCL	TEFC	CODE	G				
O.D.E. BRG.	65BC03J30X			POWER FACTOR			91	NEMA NOM EFFICIENCY			96.2		
3/4 LOAD EFF.	96.5	MAX CORR KVAR			30.0		GUARANTEED EFFICIENCY			95.8			
TEMP CODE	T2C	TEMP =	230										
CHP HZ	60-75	CT HZ	30-60		VT HZ	0-60							
INVERTER-TEMP-CODE	T2C												
SER.NO.				MOTOR WEIGHT									

Parts List

Part number	Description	Quantity
SA249723	SA P44G3953	1.000 ea
RA236583	RA P44G3953	1.000 ea
NP3238	SS CP XEX SEVERE DUTY MAIN NP,CURUS EEV	1.000 ea
000692000FF	N/P	1.000 ea
000692000VD	LABEL WARNING	1.000 ea
004824015A	GREASE POLYREX EM	0.544 lb
032018008CK	HHCS 3/8-16X1L PLATED	4.000 ea
032018012BK	HHCS 5/16-16X1-1/2PLATED	4.000 ea
032018020FK	HHCS 3/4-10X2-1/2 PLTD.	4.000 ea
032018028CK	HHCS 3/8-16X3-1/2 PLTD.	3.000 ea
034180014DA	KEY 1/4X1/4X1-3/4 L	1.000 ea
034530072AB	P/NIP 1/8X9"L Threaded both ends	1.000 ea
034530072BB	PIPE NIPPLE,DE - 440-BS	1.000 ea
034631002AB	BUSH 1/4 TO 1/8 PLTD.	1.000 ea
035000001G	GREASE RELIEF FITTING, ALEMITE 317400	1.000 ea
034690005AB	PPLG 3/4 PLATED	1.000 ea
083199082RA	G28 SHORT FAN COVER W/BAFFLE ASSEMBLY	1.000 ea
089490097A	BRKT 089490102WCA	1.000 ea
410700004F	WSHR	1.000 ea
415072001B	CLAMP	1.000 ea
415096002A	CPLG 1/8 HEX TYPE	1.000 ea
702676001D	FAN 250-440	1.000 ea
032018004BK	HHCS 5/16-18X1/2 PLATED	3.000 ea
032018006BK	HHCS 5/16-18X3/4 PLATED	3.000 ea
032018020FK	HHCS 3/4-10X2-1/2 PLTD.	4.000 ea
032018022CK	HHCS 3/8-16X2-3/4 PLTD	3.000 ea
034000013AB	WSHR 5/16" PLATED-440	3.000 ea
034017013AB	LCKW 5/16 STD. PLATED	3.000 ea
034530072AB	P/NIP 1/8X9"L Threaded both ends	1.000 ea
034530072BB	PIPE NIPPLE,DE - 440-BS	1.000 ea
034631002AB	BUSH 1/4 TO 1/8 PLTD.	1.000 ea

035000001G	GREASE RELIEF FITTING, ALEMITE 317400	1.000 ea
089490097A	BRKT 089490102WCA	1.000 ea
415915007K	GASK, 26" LAC	1.000 ea
415045002E	SLGR	1.000 ea
415096002A	CPLG 1/8 HEX TYPE	1.000 ea
702623022A	G28 AIR DEFLECTOR DRIVE END -- PLASTIC	1.000 ea
702623012A	THERMAL BARRIER, G28	1.000 ea
032018008BK	HHCS 5/16-18X1L PLATED	4.000 ea
032018008DK	HHCS 1/2-13X1 PLATED	4.000 ea
032018005DL	1/2-13 X 5/8 SILICON BRONZE HHCS	1.000 ea
035000001A	ALFTG 1/8" 1610-BL	1.000 ea
035000001A	ALFTG 1/8" 1610-BL	1.000 ea
067053014A	GASK 440	1.000 ea
076870000BA	CONDUIT BOX - 440 - 1/2-13 GROUND	1.000 ea
076871000A	+CBOX CVR BLKT - 449	1.000 ea
406056007A	GASKET, 440	1.000 ea
406099000A	PLUG - FAN COVER 320-440	1.000 ea
415000115H	T/LUG #2AWG-4/0AWG	1.000 ea
418150003A	GREASE FITTING CAP	1.000 ea
418150003A	GREASE FITTING CAP	1.000 ea
033775004EA	DRSCR #6-1/4 304 S.S.	2.000 ea
034180024HA	KEY 5/8X5/8X3 L	1.000 ea
MG1025N19	WILKO 778.50 BLUE GREEN - 55 GAL DRUMS	0.375 ga
004824003CBY	WILKO PAINT 060.02 - ACTIVATOR	0.094 ga
L482401016	SPRAY AC-29-7S	0.019 ga
421948051	LABEL, MYLAR	1.000 ea
PK5005A01	WOODEN BASE 449, 60 X 41-1/2	1.000 ea
000613006PU	N/P (RELEASE QTY 10,000) UL CSA LABEL	1.000 ea
LB1449	DIV-2/NEC WARNING LABEL	1.000 ea
412118006A	DRAIN	2.000 ea

ECP44302T-4 - 300HP, 3570RPM, 3PH, 60HZ, 449TS, A44128M, TEF								
S/O	CUSTOMER INFORMATION	PACKET	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	449TS	300	P	3/60	3570	460		
AMPS	DUTY	AMB °C/ INSUL	S.F.	NEMA DESIGN	CODE LETTER	ENCLOSURE		
318	CONT	40/F	1.15	B	G	TEFC		
E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)				
833183	418143-3SE	---	---	.00934				
PERFORMANCE								
LOAD	HP	AMPERES	RPM	% POWER FACTOR		% EFFICIENCY		
NO LOAD	0	59.8	3600	6.29		0		
1/4	75.0	109	3593	68.4		94.3		
2/4	150	171	3586	85.3		96.3		
3/4	225	242	3578	90.2		96.5		
4/4	300	318	3571	91.7		96.4		
5/4	375	399	3562	91.6		96.0		
SPEED TORQUE								
		RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.		AMPERES		
LOCKED ROTOR		0	159	703		2149		
PULL UP		1620	142	627		1977		
BREAKDOWN		3464	274	1208		1062		
FULL LOAD		3571	100	441		318		
AMPERES SHOWN FOR 460 VOLT CONNECTION. IF OTHER CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.								
TYPICAL DATA NEMA NOM. EFF. - 96.2% GUAR. MIN. EFF. - 95.8%								
ABB		DRAWN BY: J.J.HARRISON CHECKED BY: W.L.SMITH APPROVED BY: W.L.SMITH DATE: 08/04/10		AC MOTOR PERFORMANCE DATA		A44WG1242-R001 DATE ISSUED 03/30/20		

FRAME 449TS

RPM 3570

S.F. 1.15

ROTOR 48143-3SE

HP 300

VOLTS 460

NEMA DESIGN B

TEST S.O. TYPICAL DATA

TYPE P

AMPS 318

CODE LETTER G

TEST DATE ---

PHASE / HERTZ 3/60

DUTY CONT


ENCLOSURE TEFC

STATOR RES. @ 25°C .00934

AMB °C / INSUL 40/F

E/S 833183

OHMS (BETWEEN LINES)

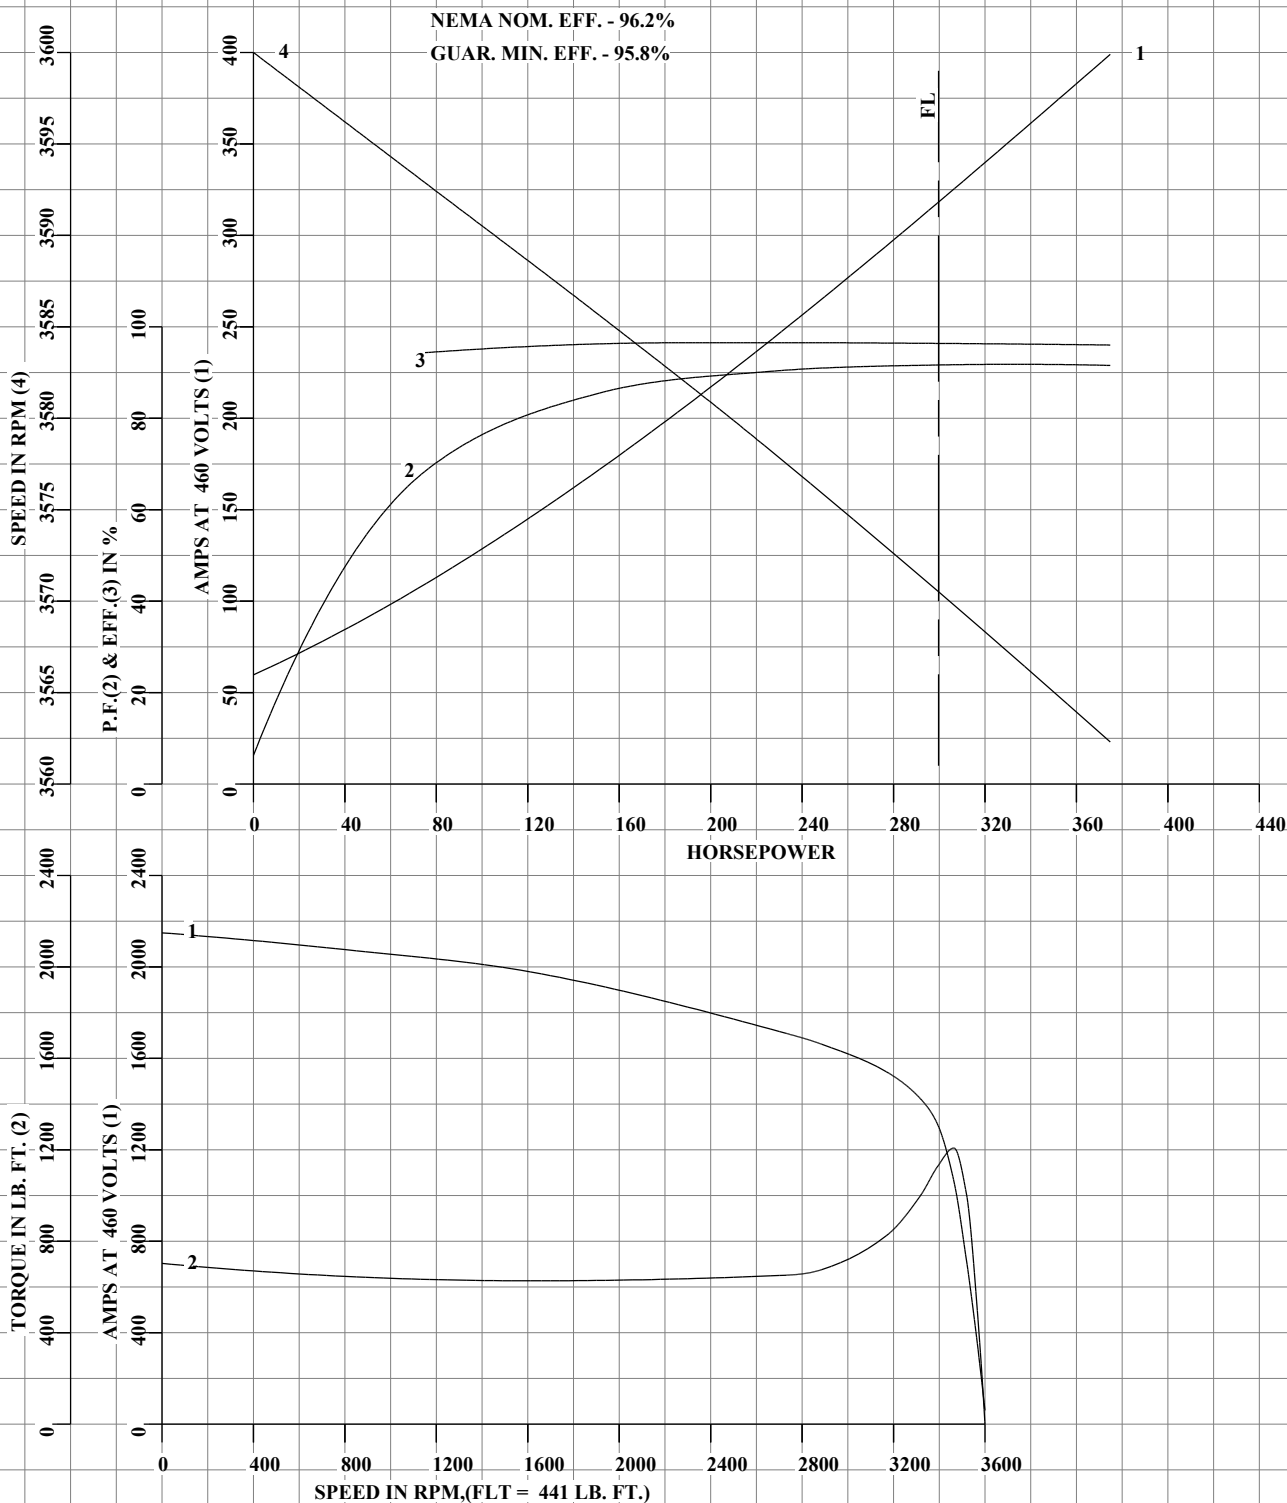

AMPERES SHOWN FOR 460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.



DRAWN BY: J.J.HARRISON
 CHECKED BY: W.L.SMITH
 APPROVED BY: W.L.SMITH
 DATE: 08/04/10

AC MOTOR
 PERFORMANCE
 DATA

A44WG1242-R001

ISSUE DATE 03/30/2026

FRAME 449TS

RPM 3570

S.F. 1.15

ROTOR 48143-3SE

HP 300

VOLTS 460

NEMA DESIGN B

TEST S.O. TYPICAL DATA

TYPE P

AMPS 318

CODE LETTER G

TEST DATE ---

PHASE / HERTZ 3/60

DUTY CONT


ENCLOSURE TEFC

STATOR RES. @ 25°C .00934

AMB °C / INSUL 40/F

E/S 833183

OHMS (BETWEEN LINES)

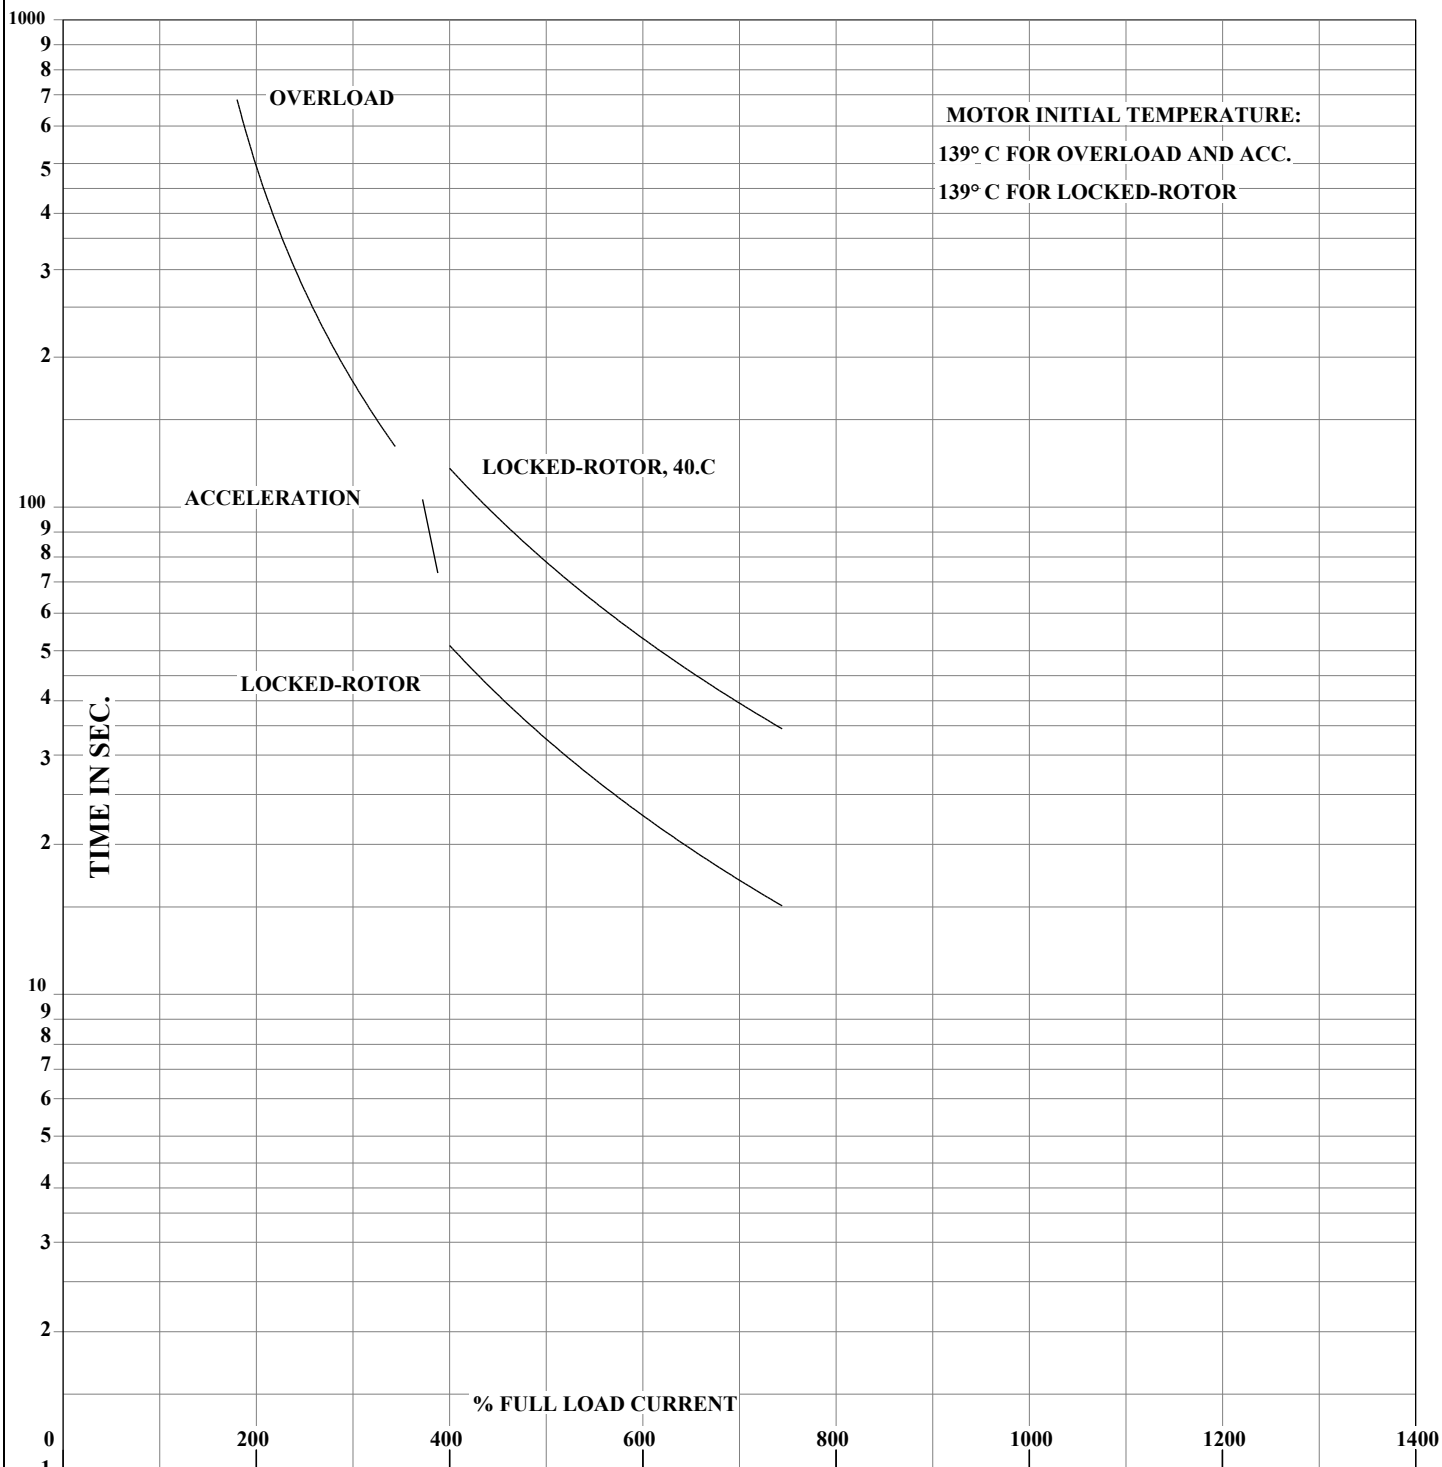

THERMAL LIMIT CURVE
NEMA NOM. EFF. - 96.2%

AMPERES SHOWN FOR 460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.





DRAWN BY: J.J.HARRISON
CHECKED BY: W.L.SMITH
APPROVED BY: W.L.SMITH
DATE: 08/04/10

AC MOTOR
PERFORMANCE
DATA

A44WG1242-R001

ISSUE DATE 03/30/2026

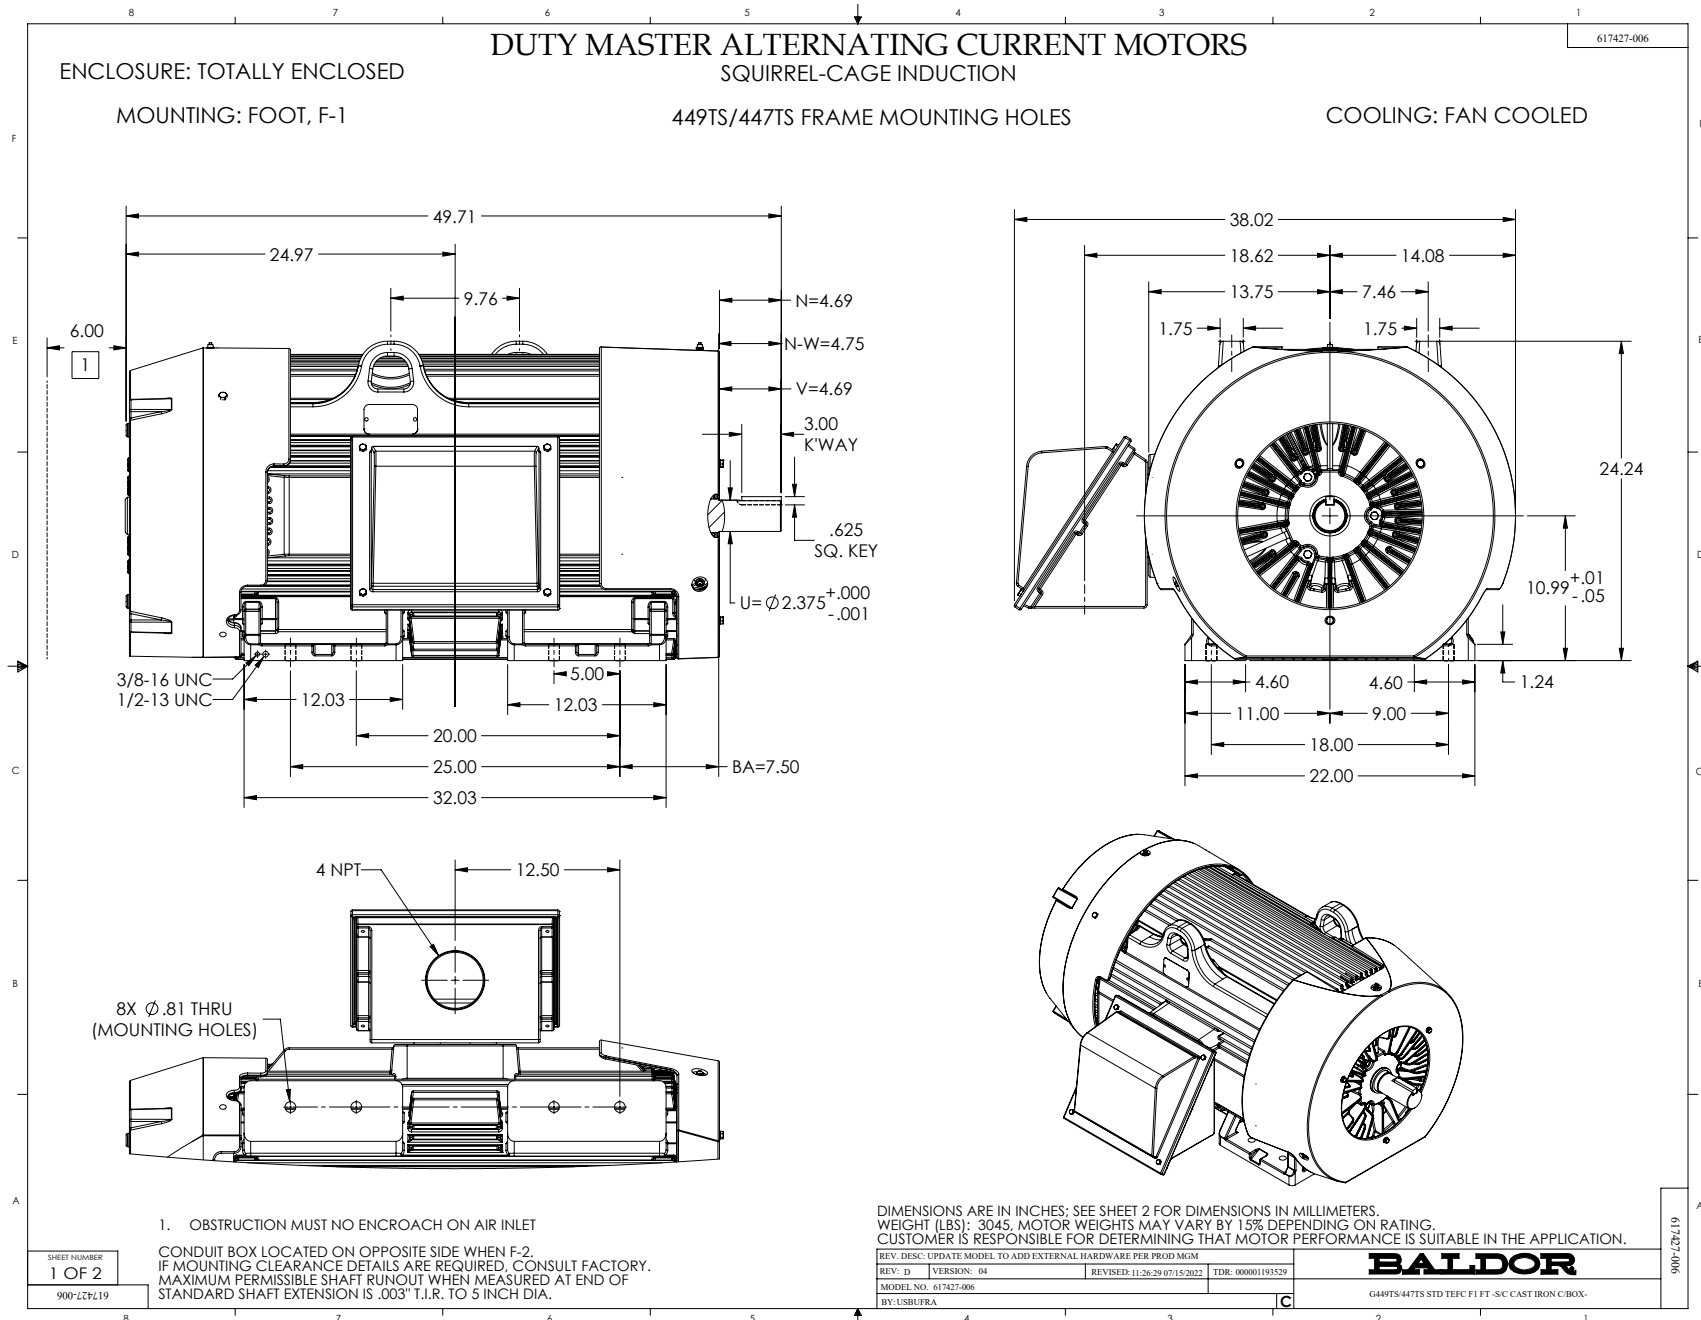

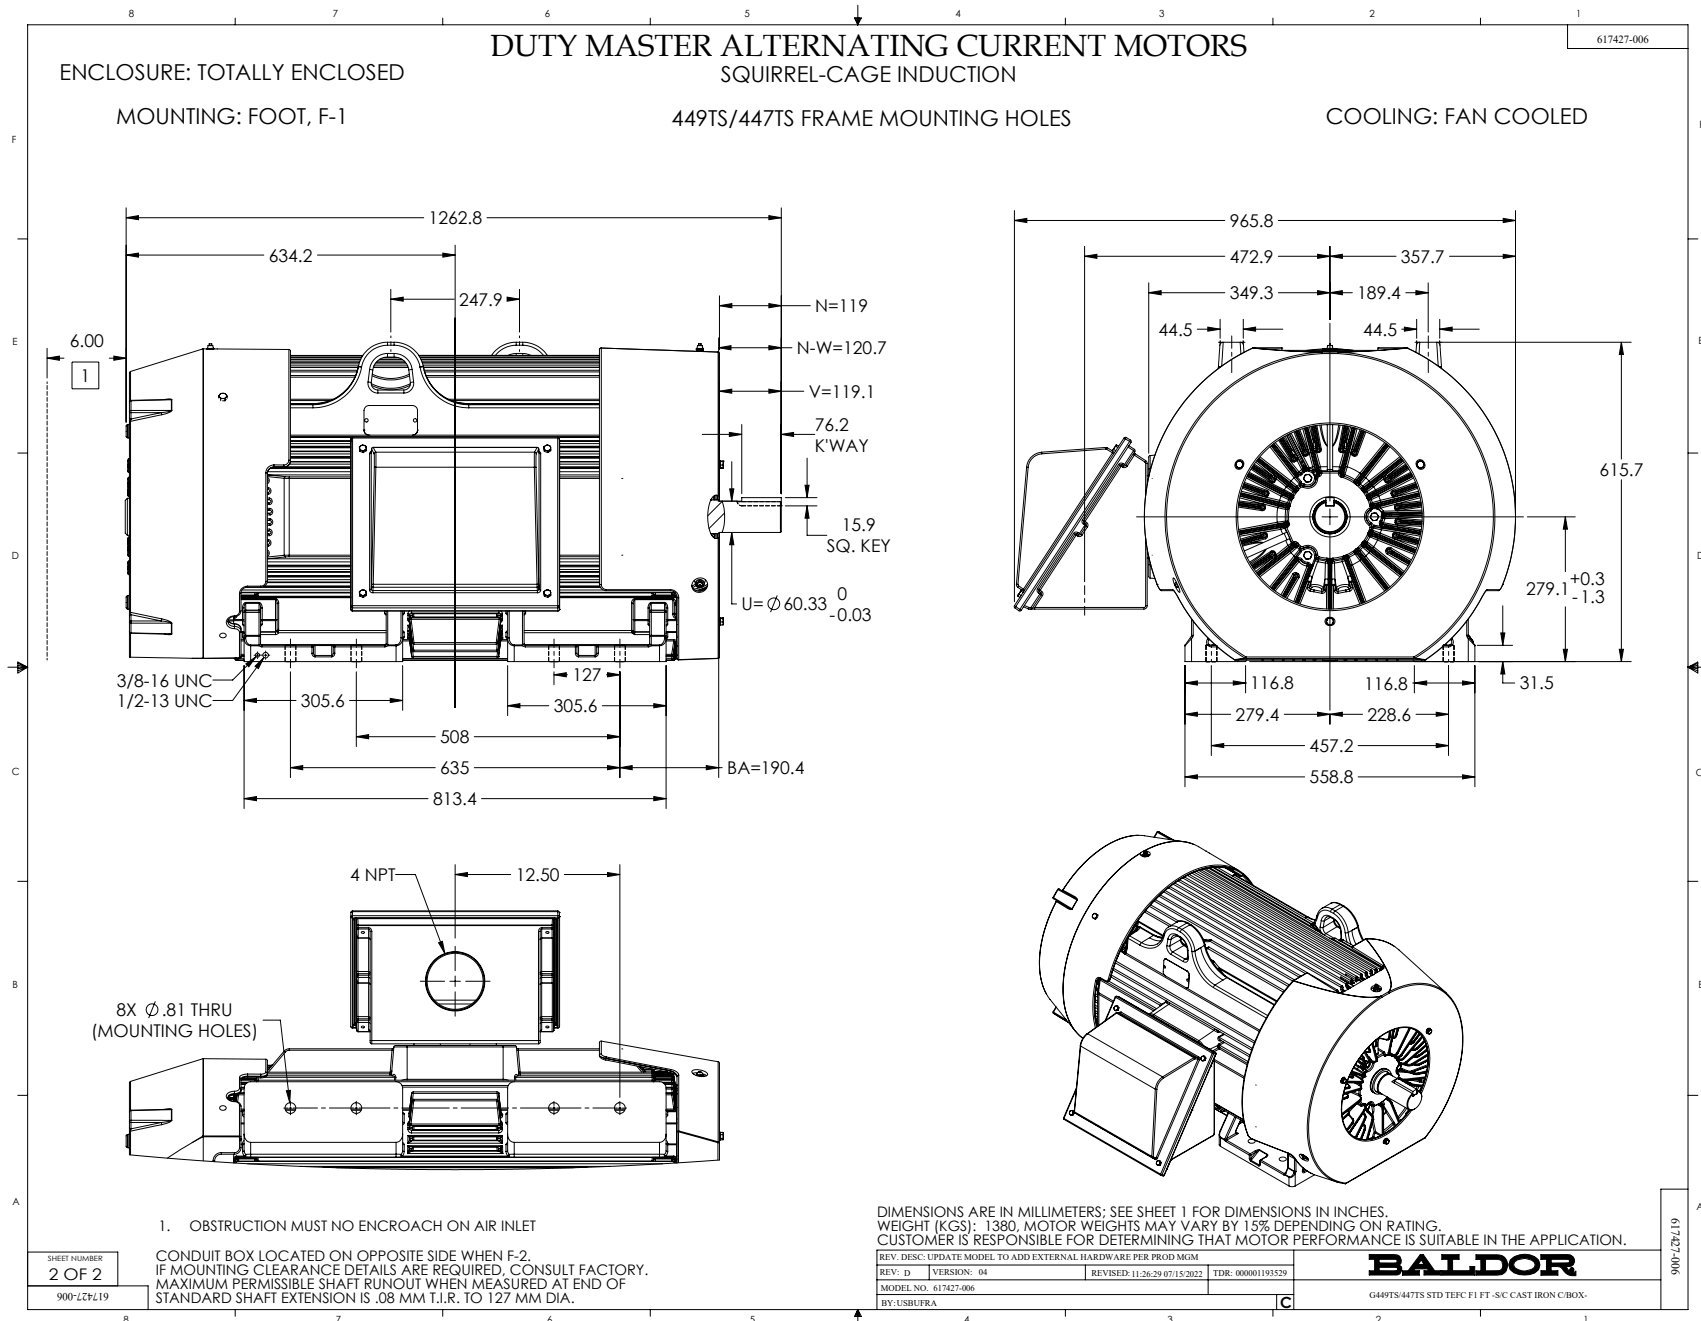

416820-036

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 3 LEAD CONNECTED



(N.P. 1575-BA)

416820-036

REV. DESC: LOADED TO BUS, C/R 335225		
REV. LTR: -	VERSION: 00	TDR: 000000538207
FILE: \MGA\00000\682		REVISED: 11: 54: 06 04/30/2010
MTL: -		BY: RAGRA

BALDOR

CONN DIAG - STANDARD 3 LEAD
SH 1 of 1