

ABB BALDOR RELIANCE III

Customer information packet

ECP62333TR-4

15HP, 1760RPM, 3PH, 60HZ, 254T, 0944M, TEFC, F1

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	254T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	15.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CSA EEV NEMA PREMIUM NEMA_PREMIUM UR CCSA US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Mobilith SHC220, HC9455
Blower	None
Constant Torque Speed Range	1.3
Current @ Voltage	17.600 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	92.4 %
Electrically Isolated Bearing	Not Electrically Isolated
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Front Face Code	Standard

Part Detail

Revision	AL
Type	AC
Mech. spec.	09K884
Base	
Status	PRD/A
Elec. spec.	09WGZ997
Layout	09LYK884
Eff. date	09-09-2024
CD Diagram	CD0006
Poles	04
Leads	3#12
Proprietary	False
Created date	09-17-2013

Front Shaft Indicator	None
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	17.6 a
Insulation Class	F
Inverter Code	Inverter Duty
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	2700 rpm
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 12 AWG
Motor Lead Termination	Ring Terminals
Motor Standards	NEMA
Motor Type	0944M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	24.86 IN
Power Factor	85
Product Family	Chem Process S/P 32-8 IEEE 841
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Tapped & Key
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1760 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None

Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate
NP4367

CAT.NO.	ECP62333TR-4			CUST. P/N						ENCL	TEFC			
SPEC.	09K884Z997			CC	010A	FRAME	254T		SER.NO.					
HP	15			CLASS	F	HZ	60	ODE BRG	6309	DE BRG	NU309			
R.P.M.	1760	MAX. R.P.M.		2700	PH.	3	DES.	B	ABMA DE BRG		45RU03X30X			
VOLTS	460			CODE	G	ABMA ODE BRG			45BC03X30X					
AMPS	17.6			MOTOR WT.		324	LUBRICATION		MOBIL SHC 222					
RATING	40C AMB-CONT			MAX. KVAR		3.5	BLANK		AIR COOLED HEAT					
NEMA NOM. EFF.	92.4	# OF ROTOR BARS		40	SER.F.	1.15	IP	56	EXCHANGER					
GUAR.MIN.EFF	91	# OF STATOR SLOTS		48	P.F.	85	1.0 S.F. ON		PWM					
TEMP CODE	T3C		INVERTER TEMP CODE:TEMP=			180								
TEMP =	160	CHP	60	TO	90									
CT	1.3	TO	60											
VOLTS		AMPS		WATTS		MAX. SPACE HEATER TEMP.					VT	O	TO	60

Parts List

Part number	Description	Quantity
SA269254	SA 09K884Z997	1.000 ea
RA255906	RA 09K884Z997	1.000 ea
WD1000B16	T&B CX70TN OR L70P TERMINAL LUG	1.000 ea
10XN2520K06	1/4-20 X 3/8" HX HD SCREWGRADE 5, ZINC P	1.000 ea
HW1002A63	WASHER, 5/8 HI-COLLAR SPRLCKWASHER	1.000 ea
09CB1002A12P	KOBX W/1.25 NPT LEAD HOLE & 2.38 MTG HOL	1.000 ea
09GS1010	GASKET, DWG, LEADWIRE SEPERATOR	1.000 ea
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	4.000 ea
WD1000B16	T&B CX70TN OR L70P TERMINAL LUG	1.000 ea
10XN2520K06	1/4-20 X 3/8" HX HD SCREWGRADE 5, ZINC P	1.000 ea
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	1.000 ea
HA3400A39	STUD- 3/8-16 X 6.44 OAL HEX	4.000 ea
HW1001A38	LOCKWASHER 3/8, ZINC PLT .688 OD, .382 I	4.000 ea
HW4601A61	INPRO SEAL #1698-A-17120-0, VBXX 309 BRG	1.000 ea
HW4500A20	1/8NPT SL PIPE PLUG	1.000 ea
HA4017A08	.125 X 3.50 LGTH GREASER EXTEN.	1.000 ea
HA4017A02	.125X2.50 GREASER EXTENS.F/S	1.000 ea
HW4019A01	PIPE COUPLING 1/8 NPT,STEEL,ZINC COATING	1.000 ea
HW4601A61	INPRO SEAL #1698-A-17120-0, VBXX 309 BRG	1.000 ea
10XN2520K36	1/4-20 X 2.25" HX HD SCRWGRADE 5, ZINC P	4.000 ea
HW4600G53	DOME SLINGER, 5.438 OD X 1.620/1.562 ID	1.000 ea
09EP1118A121P	PUEP W/309 BRG, INPRO & EPOXY PRIMER	1.000 ea
HW4500A20	1/8NPT SL PIPE PLUG	1.000 ea
10XN3816K28	3/8-16 X 1.75 HEX HD CAP SCREW, GRADE 5	4.000 ea
HW1001A38	LOCKWASHER 3/8, ZINC PLT .688 OD, .382 I	4.000 ea
10XN2520K36	1/4-20 X 2.25" HX HD SCRWGRADE 5, ZINC P	4.000 ea
XY3816A12	3/8-16 FINISHED NUT W/SERRATIONS	4.000 ea
HW1001A38	LOCKWASHER 3/8, ZINC PLT .688 OD, .382 I	4.000 ea
WD4100A08	HEYCO #2783 DOME PLUG DP-2000(CUSTOME	1.000 ea
12CB1503P	CONDUIT BOX LID, CAST W/EPOXY PRIMER	1.000 ea
12GS1002	GASKET, CONDUIT BOX LID, NEOP	1.000 ea

10XN3118K16	5/16-18 X 1' GRADE #5, STL, ZINC PLATE	2.000 ea
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	2.000 ea
MJ5004A59	ADHESIVE LOCTITE #401 MSC #88545264	0.010 ea
HW2501G25	KEY, 3/8 SQ X 2.875	1.000 ea
MJ5001A27	32220KN GRAY SEALER *MIN BUY 4 QTS=1GAL	0.031 qt
MJ5002A01	SILICON RUBBER SEALANT, 732CL 10.3 OZ TU	0.023 ea
WD1000B49	T&B C73,RING TERMINAL 10-12 AWG 3/8 STUD	3.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
LD7020D03	LEAD SET, 12AWG, 3 LEAD, 20" LONG LEADS	1.000 ea
09EP1118A121LP5	FREP MACH, 309 BRG. EPOXY & MG1025L14	1.000 ea
HW4500A21	1618BALEMITE FITTING 825 UNIVERSAL	1.000 ea
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 ea
HW4500A17	317400 ALEMITE GREASE RELIEF	1.000 ea
HA4002A03	#304 S.S. DRAIN FITTING, .125 NPT (.44 H	1.000 ea
MJ1000B28	GREASE, MOBIL SHC POLYREX 222	0.080 lb
HW4500A03	GREASE FITTING, .125 NPT 1610(ALEMITE) 8	1.000 ea
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 ea
HW4500A17	317400 ALEMITE GREASE RELIEF	1.000 ea
HA4002A03	#304 S.S. DRAIN FITTING, .125 NPT (.44 H	1.000 ea
37FN3002B02	EXFN, PLASTIC, 7.50 OD, 1.503 ID	1.000 ea
HW2500A25	WOODRUFF KEY USA #1008 #BLOW CARBON STEE	1.000 ea
09FH1000A74LP5	FAN HSG, W/EPOXY, 2.00 BORE W/MG1025L14	1.000 ea
MG1025N19	WILKOFAS, 778.50, RELIANCE BLUE-GREEN 8	0.050 ga
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	4.000 ea
LB1449	DIV-2/NEC WARNING LABEL	1.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
LC0006	CONNECTION LABEL	1.000 ea
NP4367	2gd	1.000 ea
40PA1005	PACKAGING GROUP, 09 STD	1.000 ea
09PA1061	PKGP SHAFT TENSIONER 2X4 4-3/4 LEG 4-1/2	1.000 ea

AC Induction Motor Performance Data

Record # 92350

Typical performance - not guaranteed values

Winding: 09WGZ997-R019			Type: 0944M	Enclosure: TEFC	
Nameplate Data			460 V, 60 Hz: Single Voltage Motor		
Rated Output (HP)		15	Full Load Torque		44.6 LB-FT
Volts		460	Start Configuration		direct on line
Full Load Amps		17.6	Breakdown Torque		163 LB-FT
R.P.M.		1760	Pull-up Torque		53.3 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	73.2 LB-FT
NEMA Design Code	B	KVA Code	G	Starting Current	116 A
Service Factor (S.F.)		1.15	No-load Current		6.19 A
NEMA Nom. Eff.	92.4	Power Factor	85	Line-line Res. @ 25°C	0.62 Ω
Rating - Duty		40C AMB-CONT	Temp. Rise @ Rated Load		50°C
S.F. Amps			Temp. Rise @ S.F. Load		62°C
			Locked-rotor Power Factor		32.7
			Rotor inertia		1.92 lb-ft²

Load Characteristics 460 V, 60 Hz, 15 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	52	73	84	86	87	88	87
Efficiency	89.4	92.6	93	92.4	91.4	90.3	91.9
Speed	1792	1783	1773	1763	1752	1739	1756
Line amperes	7.44	10.3	13.5	17.6	22	26.6	20.2


ABB Motors and Mechanical Inc.


WINDING # 09WGZ997

Typical performance - not guaranteed values.




15 HP 3 PH 60 HZ 1760 RPM 460 V 0944M

TORQUES (LB-FT): PO=163 PU=53.3 LR=73.2 LRA=116

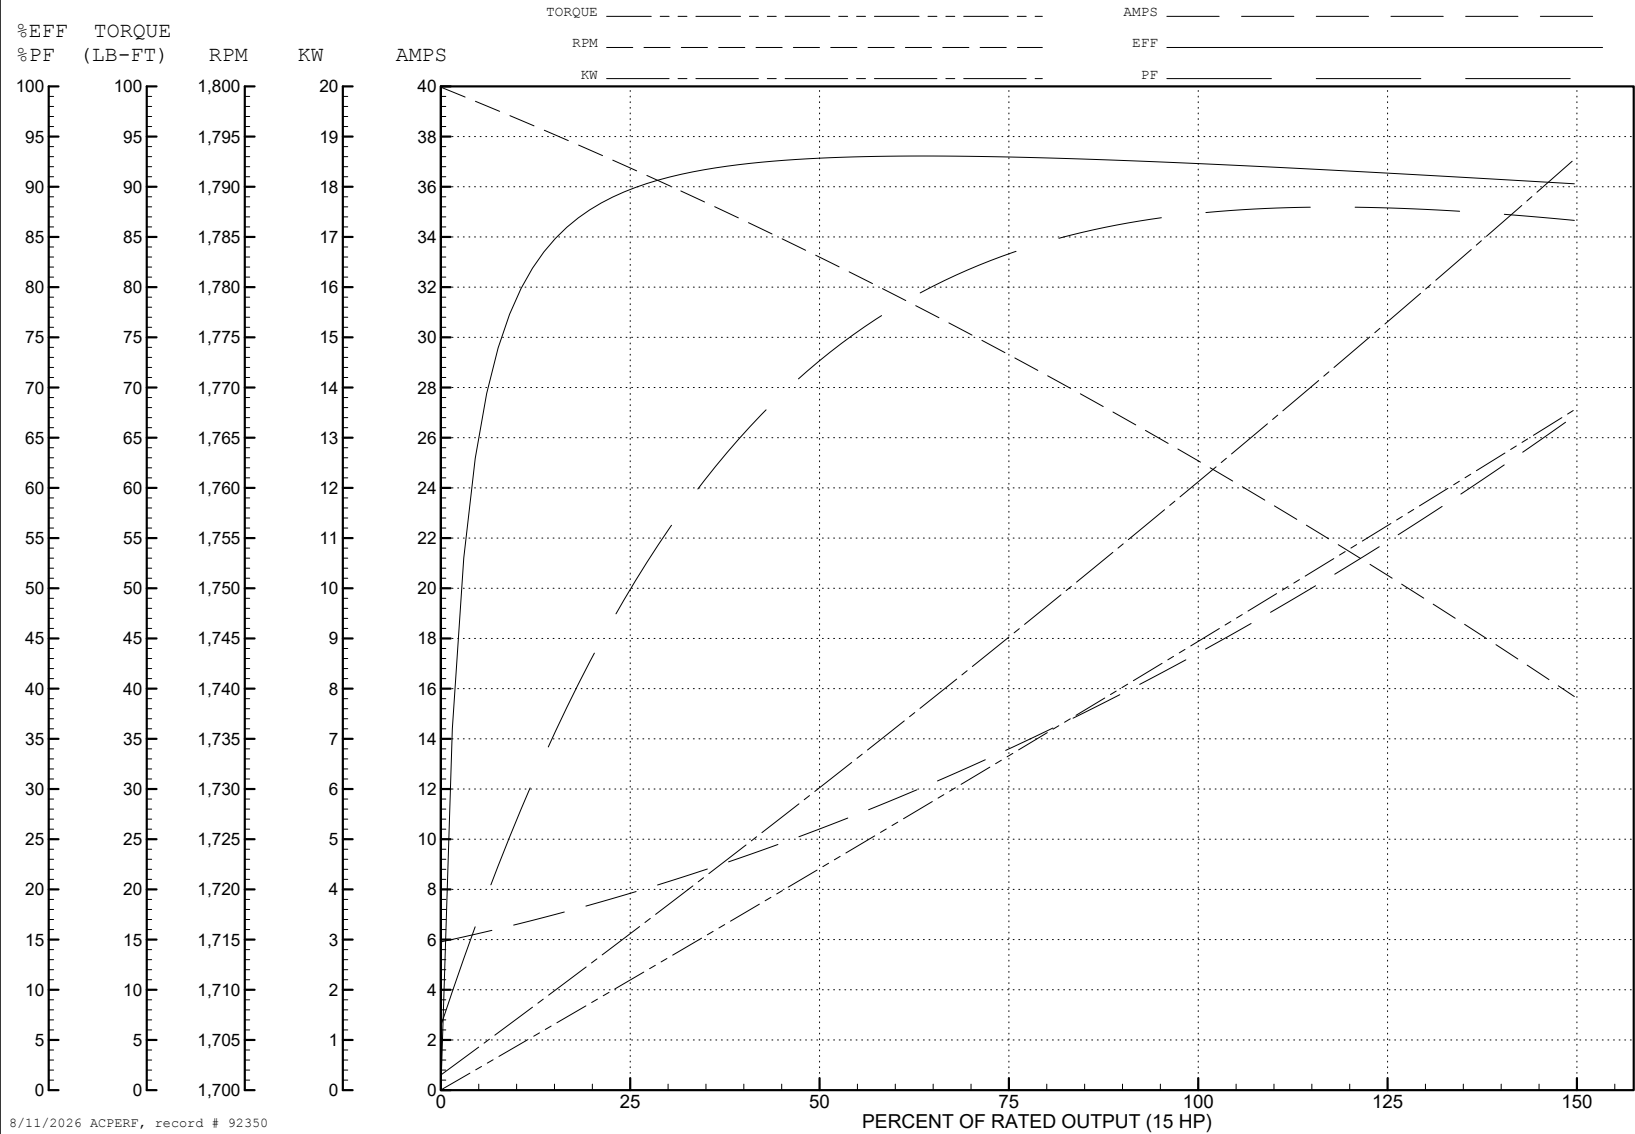

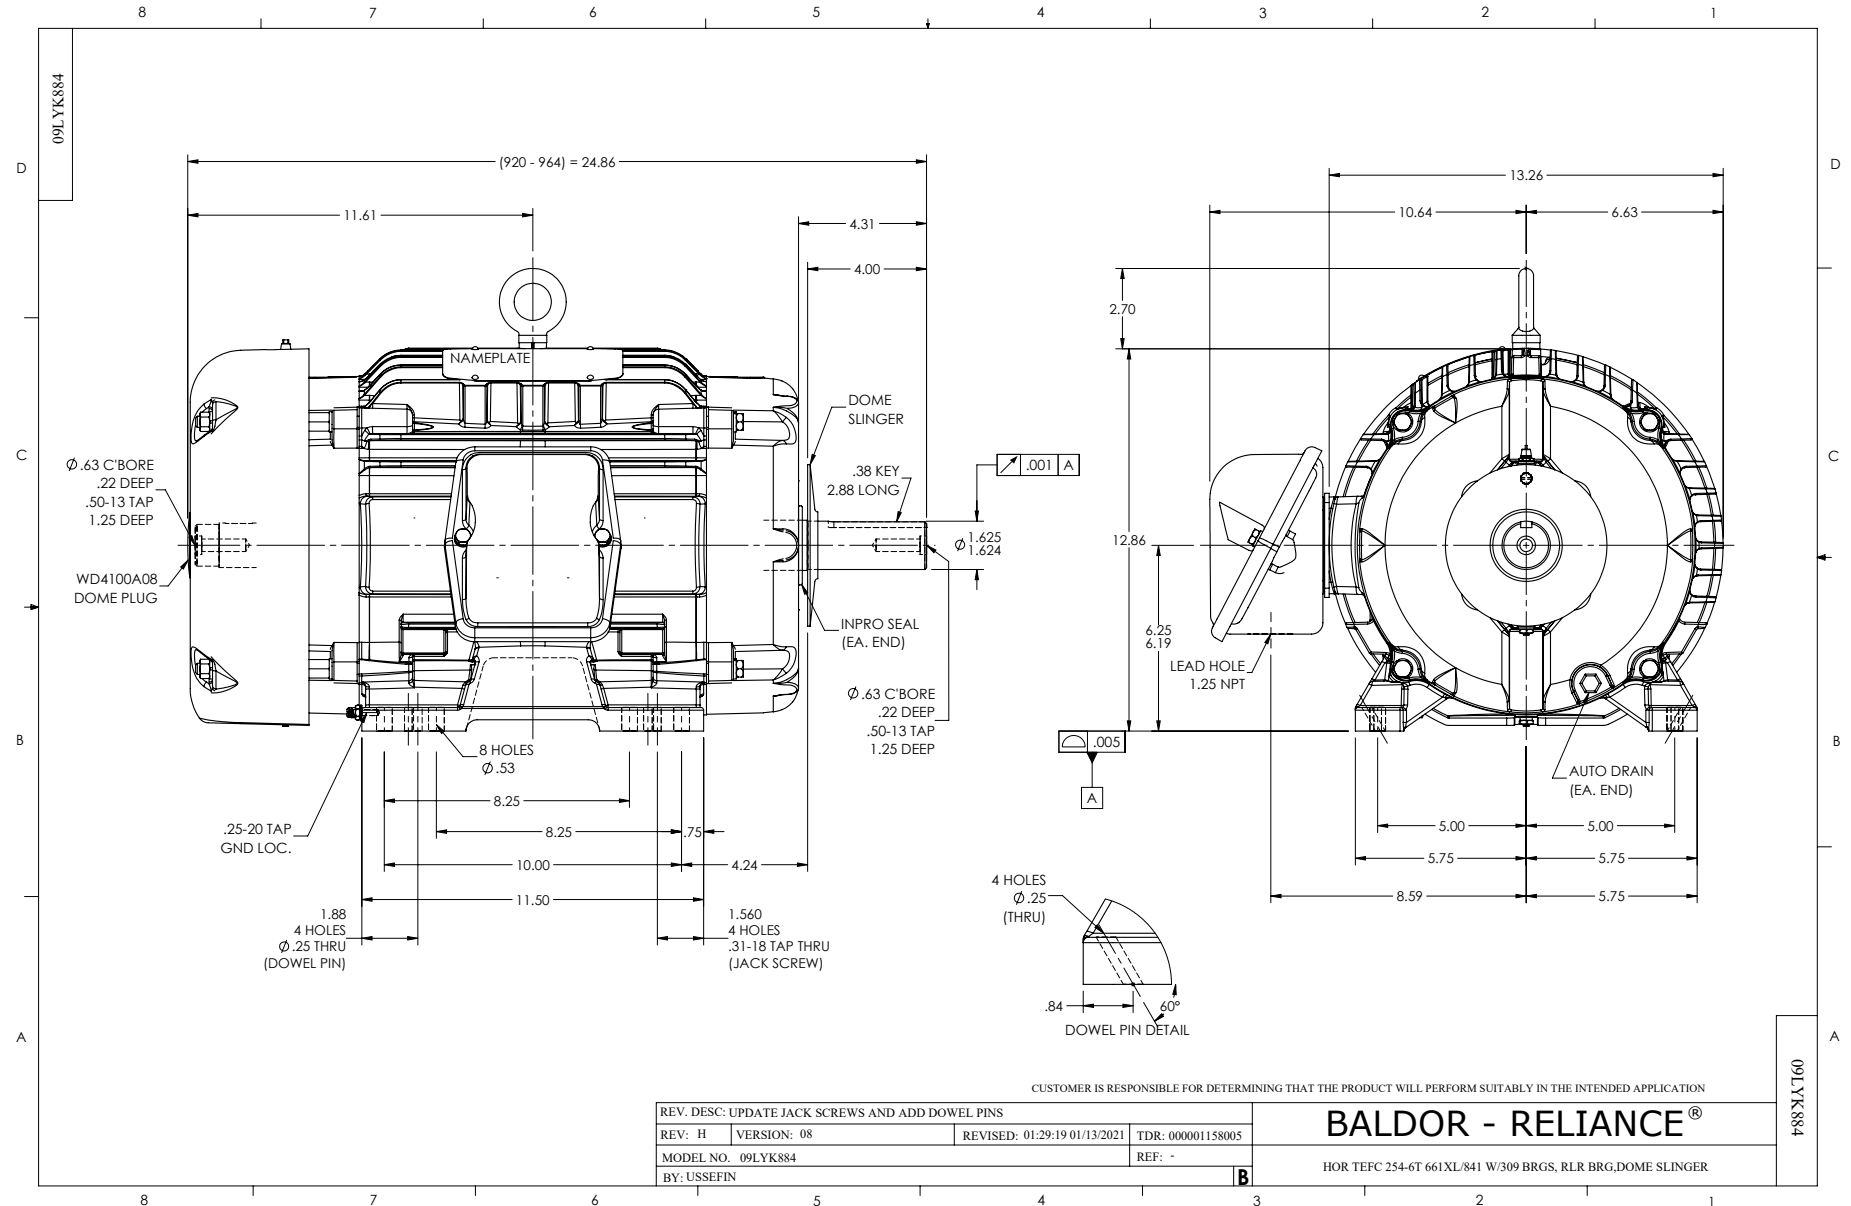

CD0006

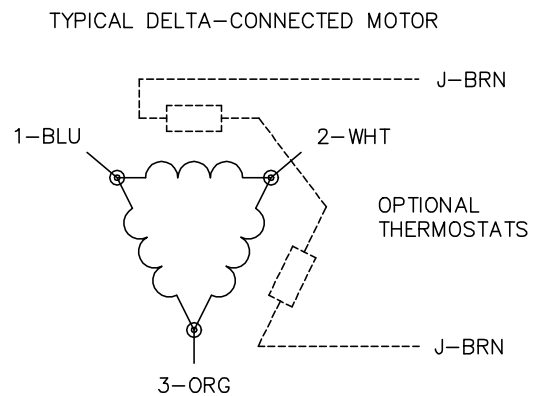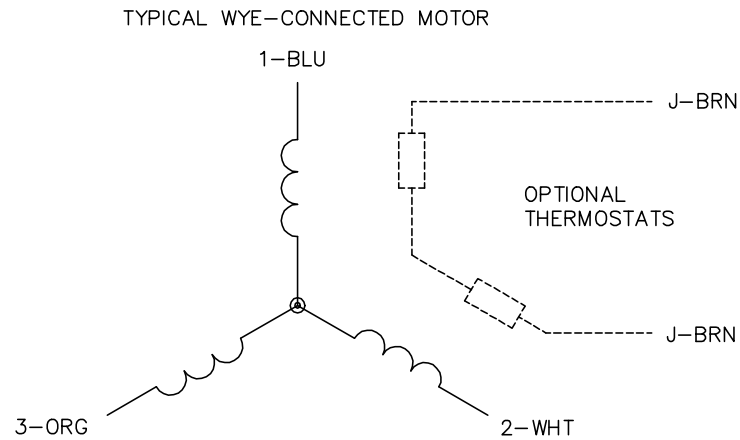

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007

REV. LTR: E

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\141

REVISED: 10:24:49 02/19/2019

BY: ENBRIRO

MTL: -



BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1