

ABB BALDOR RELIANCE III

Customer information packet

ECP63665T-4

5HP, 1750RPM, 3PH, 60HZ, 184T, 0641M, TEFC, F1

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	184T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CSA EEV NEMA PREMIUM NEMA_PREMIUM UR CCSA US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	1.7
Current @ Voltage	6.450 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Enclosure Modification	841
Feedback Device	NO FEEDBACK
Front Face Code	Standard

Part Detail

Revision	X
Type	AC
Mech. spec.	06K171
Base	
Status	PRD/A
Elec. spec.	06WGX203
Layout	06LYK171
Eff. date	10-01-2025
CD Diagram	CD0006
Poles	04
Leads	3#16
Proprietary	False
Created date	08-21-2013

Front Shaft Indicator	None
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	6.5 a
Insulation Class	F
Inverter Code	Inverter Duty
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	2700 rpm
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0642M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	15.93 IN
Power Factor	81
Product Family	Chem Process S/P 32-8 IEEE 841
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1750 rpm
Speed Code	Single Speed
Starting Method	Direct on line

Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP4366											
CAT.NO.	ECP63665T-4					IP56					
SPEC.	06K171X203										
HP	5 TE										
VOLTS	460										
AMPS	6.45										
R.P.M.	1750					PH3					
FRAME	184T	HZ		60							
SER.F.	1.15	CODE	J	DES.	B					CLASS	F
RATING	40C AMB-CONT										
SN											
DE	6206	ODE		6206							
NEMA NOM. EFF.	89.5	P.F.		81							
GUAR. MIN. EFF.	87.5	CC	010A								
T. CODE	T3C	TEMP=		160							

NP3187				
SPEC.	06K171X203			
D.E. BRG.	30BC02X30X			
O.D.E. BRG.	30BC02X30X			
GREASE	POLYREX EM			
WEIGHT	128	# OF ROTOR BARS	28	# OF STATOR SLOTS 36
RPM MAX	2700	MAX. KVAR	1	
BLANK				
INV.TYPE	PWM			
T=	160			
C HP FR	60	C HP TO	90	
CT HZ FROM	1.7	CT HZ TO	60	
VT HZ FROM	0-	VT HZ TO	60	
HTR-VOLTS	N/A	HTR-AMPS	N/A	
WATTS	N/A	MAX. SPACE HEATER TEMP.	N/A	

Parts List

Part number	Description	Quantity
SA268131	SA 06K171X203	1.000 ea
RA254794	RA 06K171X203	1.000 ea
36FN3000C01SP	EXFN, PLASTIC, 5.25 OD, .912 ID	1.000 ea
HW3201A05	3/8-16 EYEBOLT	1.000 ea
06CB1001A06G	CONDUIT BOX, M20 X 1.5 @6,GRD SCREW,GRAY	1.000 ea
RM1016	LEAD SEPARATOR GASKET - 305/306 C.P.MOTO	1.000 ea
10XN2520A12	1/4-20 X 3/4 HEX HEAD CAP	2.000 ea
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	2.000 ea
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
HW3001B01	BRASS CUP WASHER, FOR #10 SCREW	1.000 ea
WD1000B16	T&B CX70TN OR L70P TERMINAL LUG	1.000 ea
10XN2520G06	1/4 20X3/8 HX HD CAP, GREEN	1.000 ea
06PE1132A02G	FREP ASSEMBLY FOR ROUTING PURPOSES	1.000 ea
HW4601B24	INPRO SEAL, 206 BRG, MINI66	1.000 ea
HW4500A32	FIT./EXT 1698-B (ALEMITE)GREASE FITTING	1.000 ea
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 ea
51XN1032A20	10-32 X 1 1/4 HX WS SL SR	4.000 ea
HW4600G50	DOME SLINGER, 4.25 OD X 1.120/1.085 ID	1.000 ea
HW4500A17	317400 ALEMITE GREASE RELIEF	1.000 ea
HA4010A01	T-DRAIN PLUG,416 S.S.,W/ 1/4-28 THD & .0	1.000 ea
HW5100A06	W2420-025 WVY WSHR (WB)	1.000 ea
06EP1132A01G	PUEP ENCL 206,BRG RET,GRSR,RLF,DRAIN FIT	1.000 ea
HW4601B24	INPRO SEAL, 206 BRG, MINI66	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 ea
HW4500A17	317400 ALEMITE GREASE RELIEF	1.000 ea
HA4010A01	T-DRAIN PLUG,416 S.S.,W/ 1/4-28 THD & .0	1.000 ea
51XN1032A20	10-32 X 1 1/4 HX WS SL SR	4.000 ea
HA3101A34	THRUBOLT- 1/4-20 X 10.375	4.000 ea
XY2520A12	1/4-20 HEX NUT, DIRECTIONAL SERRATIONS	4.000 ea

51XB1214A16	12-14X1.00 HXWSSLD SERTYB	1.000 ea
06FH1004A58G	FAN HOUSING, W/GRS & 1.25 DIA. SHAFT HOL	1.000 ea
10XN2520A24	1/4-20X 1 1/2 HEX HD X	3.000 ea
WD4100A29	DP-1250 HEYCO DOME PLUGS P/N 2740 BLACK	1.000 ea
WD4100A02	DP-1000 HEYCO PLUG OR 62MP1000 MICRO PL	1.000 ea
06CB1503A01G	LIPPED CONDUIT BOX LID, MACH GRAY EPOXY	1.000 ea
06GS1009	GASKET, KOBX LID, 1/8" THICK BLACK NEOPR	1.000 ea
10XN2520A12	1/4-20 X 3/4 HEX HEAD CAP	2.000 ea
MJ5001A02	732 CL SEALANT 3 OZ DIXIE BEARING 289100	0.010 ea
HW2501E16	KEY, 1/4 SQ X 1.750	1.000 ea
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 ea
MJ5001A27	32220KN GRAY SEALER *MIN BUY 4 QTS=1GAL	0.001 qt
MJ1000A73	INPRO P-80 ASSEMBLY LUB./ 1 QT. CONTAIN	0.001 qt
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	4.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
LT0019A00	MOTOR NO-LOAD PERFORMANCE DATA SHEET	1.000 ea
WD1000D21	TRM,T&B #B71M,RING,18-14,.25,NON-INSL	3.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
MG1025N19	WILKOFAS, 778.50, RELIANCE BLUE-GREEN 8	0.028 ga
LB1449	DIV-2/NEC WARNING LABEL	1.000 ea
LC0006	CONNECTION LABEL	1.000 ea
NP4366	SS 661XL-2021 DIV-2 UL CSA-C US EEV	1.000 ea
NP3187	SS IEEE661 INV AUX DATA INFORMATION	1.000 ea
37PA1074	PALLET PACK GRP, PRINT BOX PK1026A06	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea

AC Induction Motor Performance Data

Record # 47020

Typical performance - not guaranteed values

Winding: 06WGX203-R061			Type: 0642M		Enclosure: TEFC	
Nameplate Data			460 V, 60 Hz: Single Voltage Motor			
Rated Output (HP)		5	Full Load Torque		15 LB-FT	
Volts		460	Start Configuration		direct on line	
Full Load Amps		6.6	Breakdown Torque		49.5 LB-FT	
R.P.M.		1750	Pull-up Torque		25.5 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque	31 LB-FT	
NEMA Design Code	B	KVA Code	J	Starting Current	44.65 A	
Service Factor (S.F.)		1.15	No-load Current		3.02 A	
NEMA Nom. Eff.	89.5	Power Factor	79	Line-line Res. @ 25°C	2.63 Ω	
Rating - Duty		40C	AMB-CONT	Temp. Rise @ Rated Load	53°C	
S.F. Amps				Temp. Rise @ S.F. Load	65°C	
				Locked-rotor Power Factor	40.5	
				Rotor inertia	0.391 lb-ft²	

Load Characteristics 460 V, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	41	63	75	81	84	85	81
Efficiency	85.2	89.8	90.4	89.8	88.4	86.9	88.7
Speed	1789	1777	1765	1752	1737	1721	1739
Line amperes	3.35	4.14	5.21	6.45	7.91	9.47	7.52


ABB Motors and Mechanical Inc.

WINDING # 06WGX203

Typical performance - not guaranteed values.

5 HP 3 PH 60 HZ 1750 RPM 460 V 0642M

TORQUES (LB-FT): PO=49.5 PU=25.5 LR=31 LRA=44.65

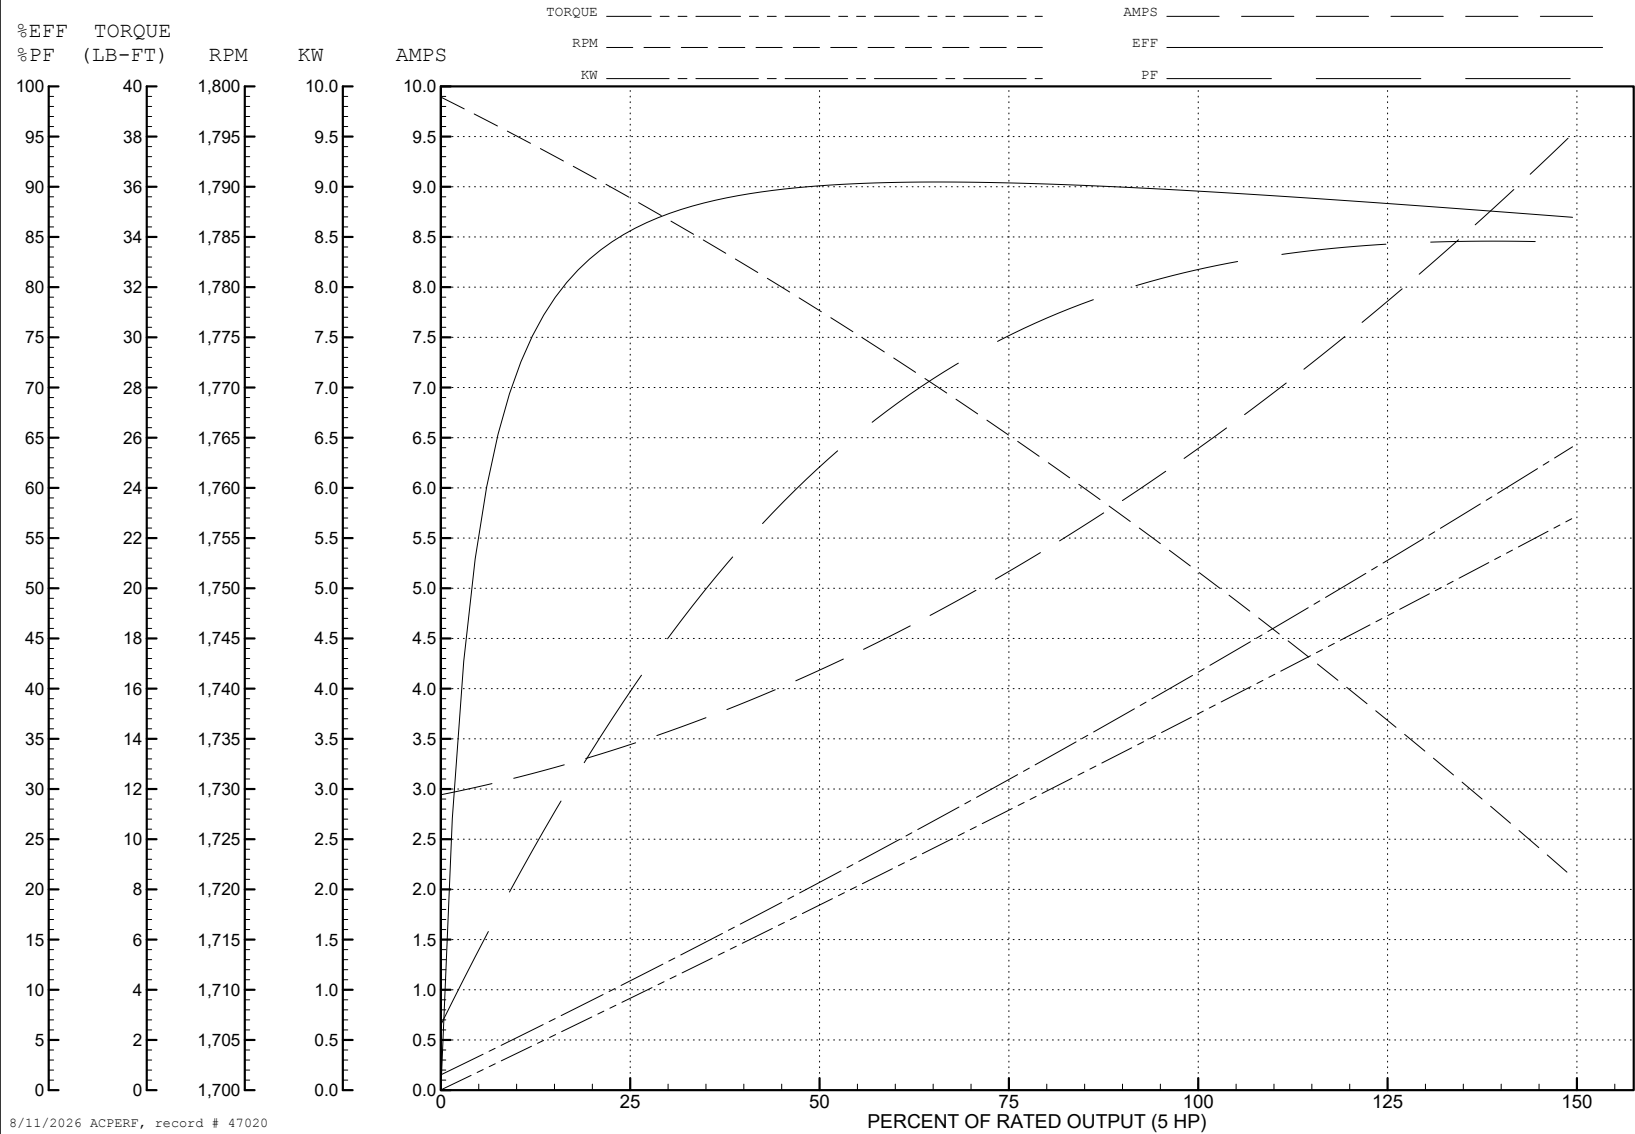

AC Induction Motor Performance Data

Record # 116644

Typical performance - not guaranteed values

Winding: 06WGX203-R061			Type: 0642M		Enclosure: TEFC	
Nameplate Data			368 V, 60 Hz: Single Voltage Motor			
Rated Output (HP)		5	Full Load Torque		15.46 LB-FT	
Volts		460	Start Configuration		direct on line	
Full Load Amps		6.45	Breakdown Torque		21 LB-FT	
R.P.M.		1750	Pull-up Torque		10.6 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque	12.9 LB-FT	
NEMA Design Code	B	KVA Code	J	Starting Current	29.6 A	
Service Factor (S.F.)		1.15	No-load Current		1.71 A	
NEMA Nom. Eff.	89.5	Power Factor	81	Line-line Res. @ 25°C	2.63 Ω	
Rating - Duty		40C AMB-CONT	Temp. Rise @ Rated Load		95°C	
S.F. Amps			Temp. Rise @ S.F. Load		129°C	
			Locked-rotor Power Factor		40.5	
			Rotor inertia		0.391 lb-ft²	

Load Characteristics 368 V, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	63	75	75	73	70	64	71
Efficiency	89.5	90.5	88.3	85.1	80.7	74	82.5
Speed	1779	1755	1728	1696	1654	1589	1671
Line amperes	2.49	4.27	6.59	9.46	12.92	18.55	11.5


ABB Motors and Mechanical Inc.


WINDING # 06WGX203

Typical performance - not guaranteed values.




5 HP 3 PH 60 HZ 1750 RPM 368 V 0642M

TORQUES (LB-FT): PO=21 PU=10.6 LR=12.9 LRA=29.6

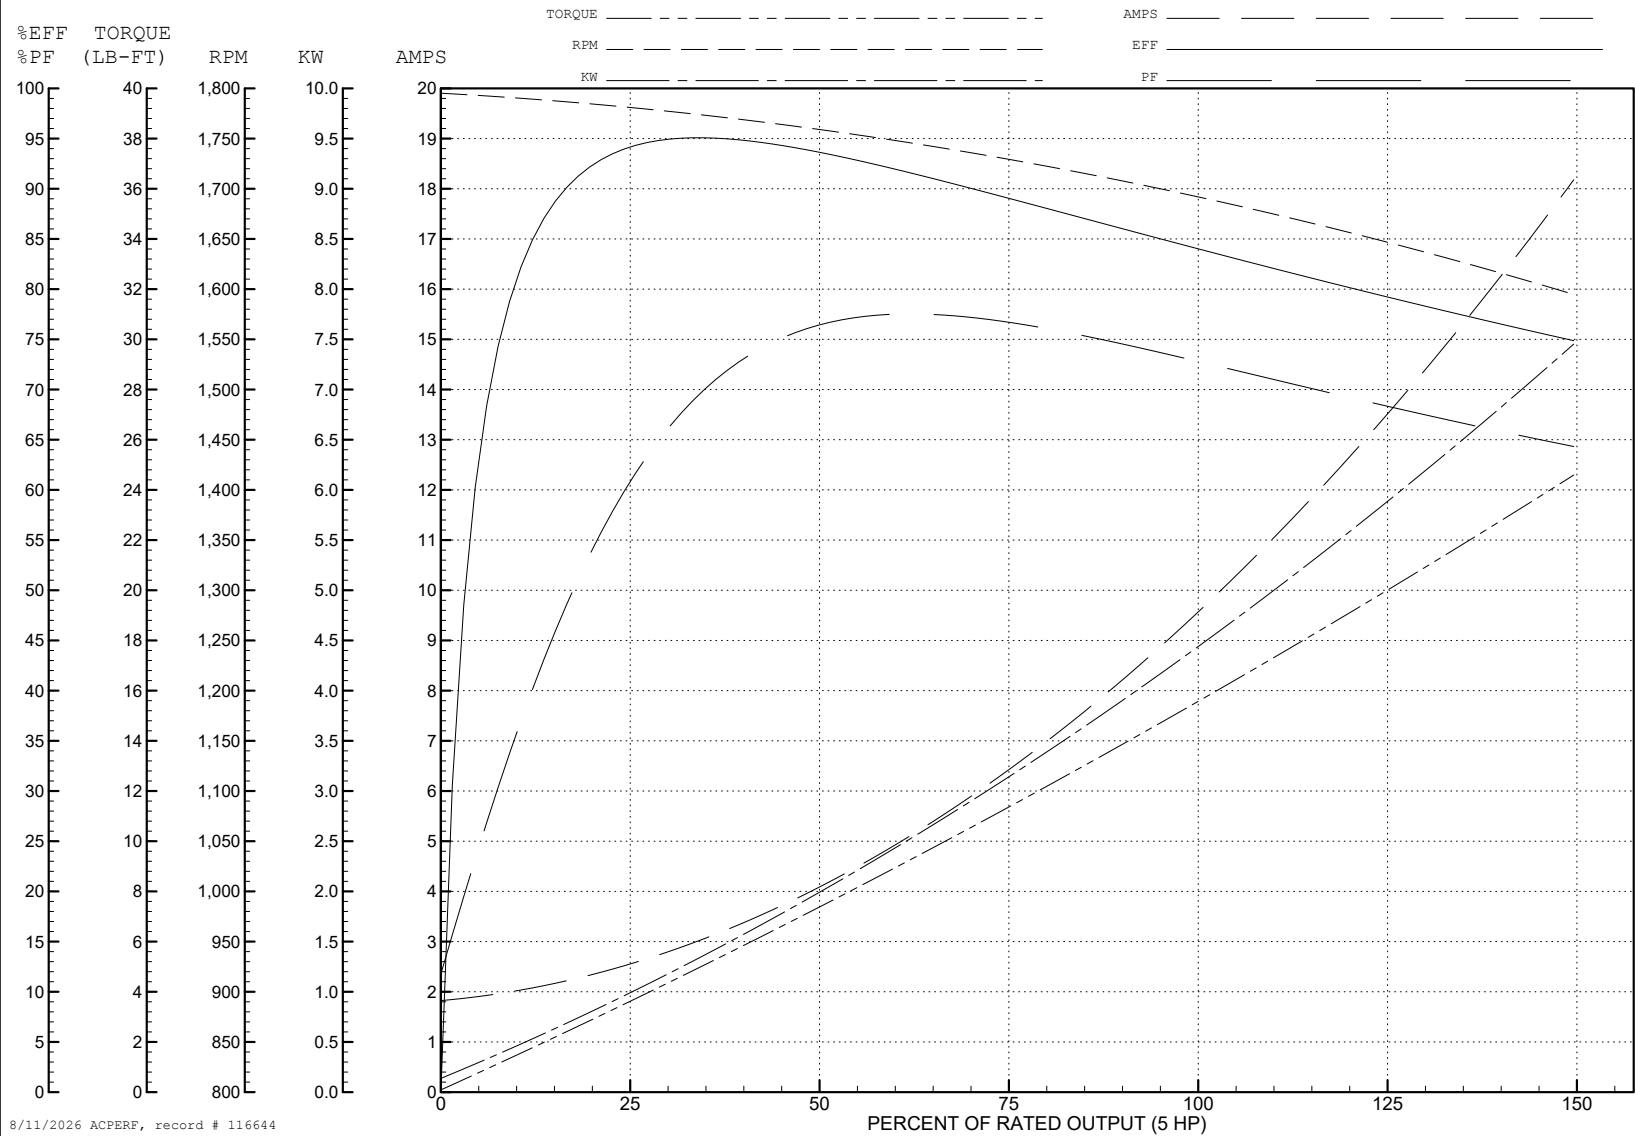

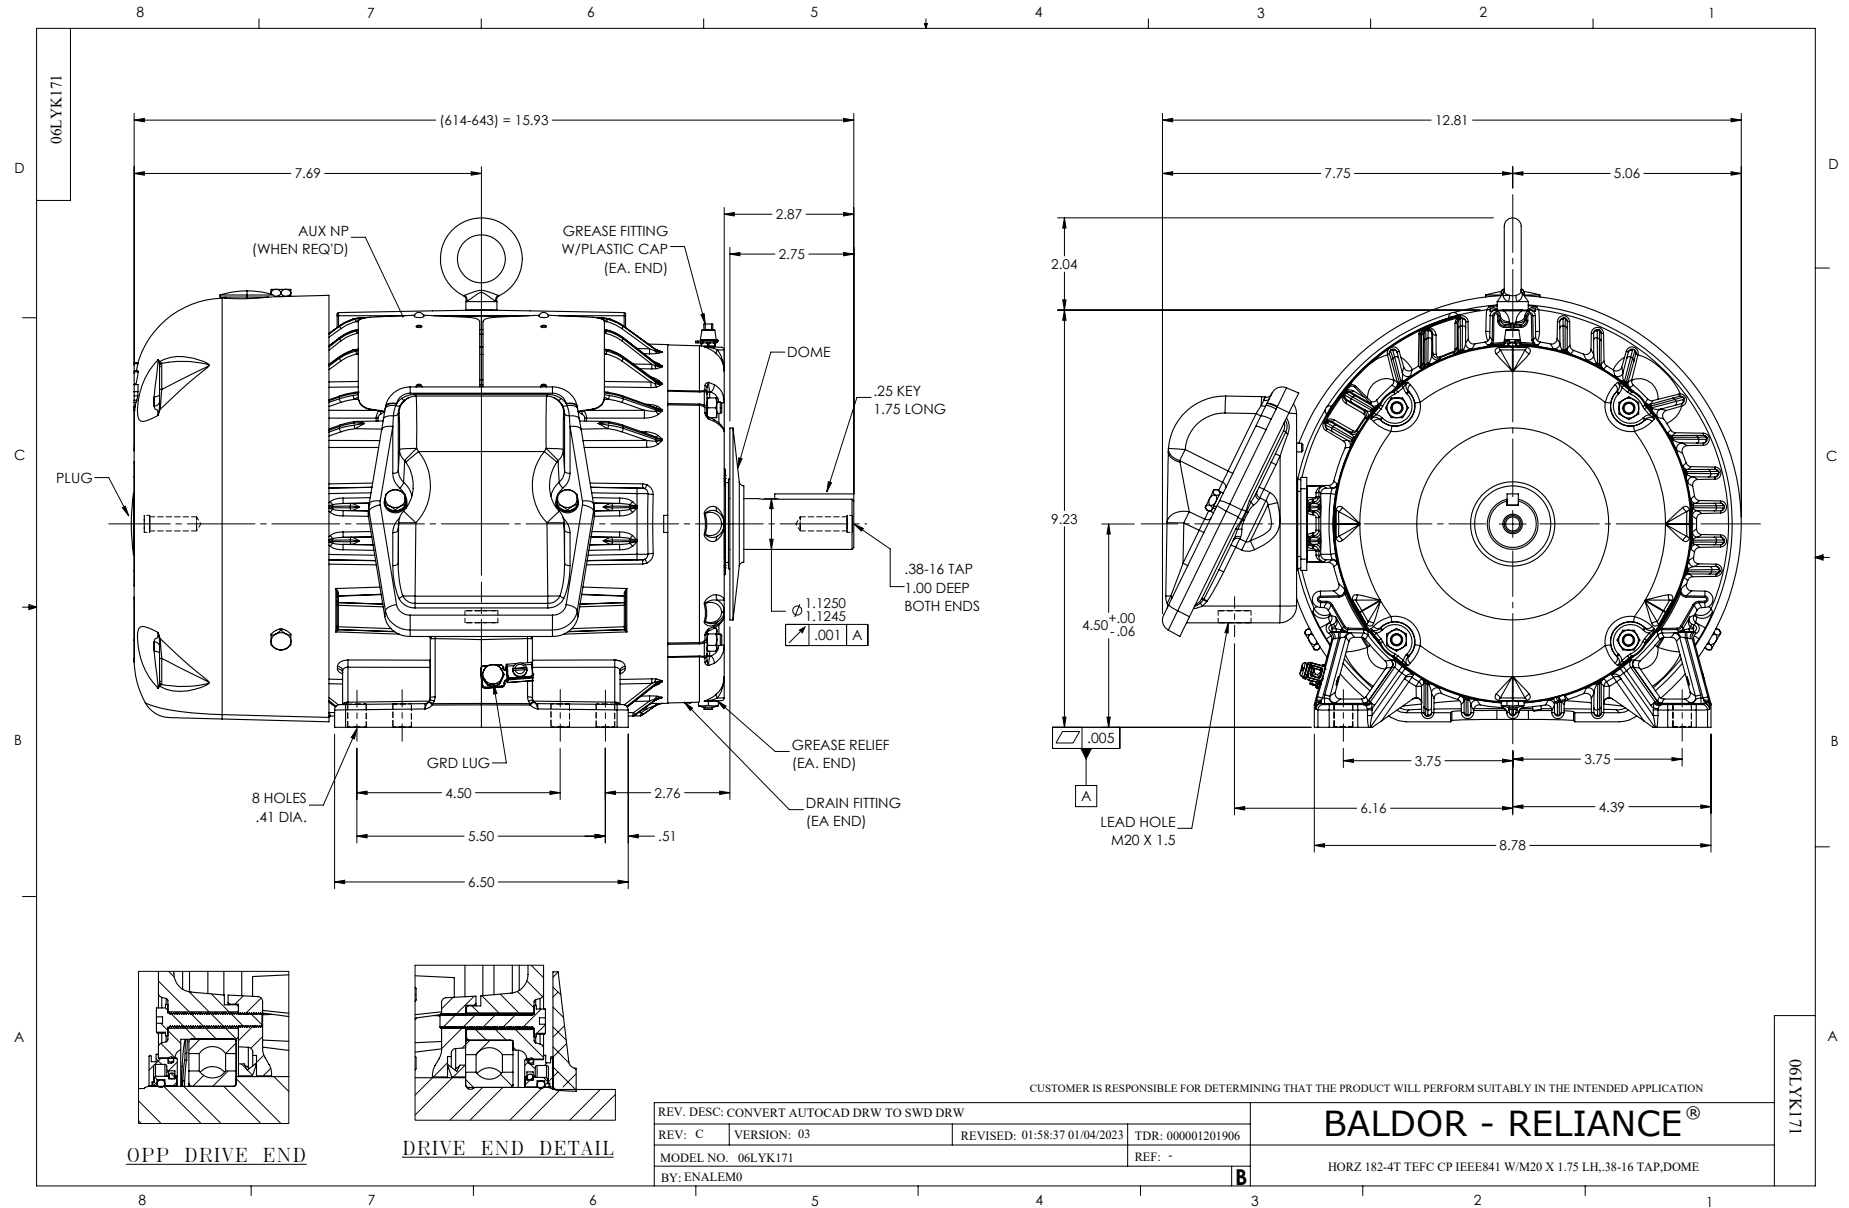

CD0006

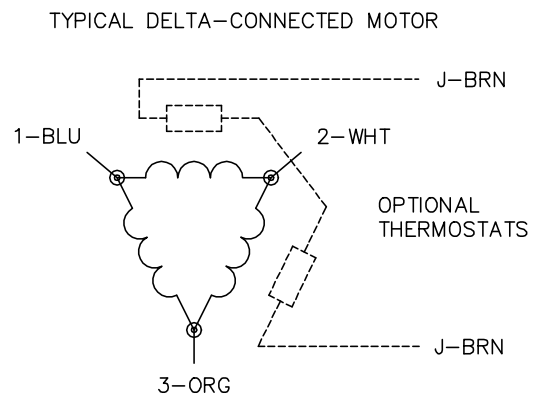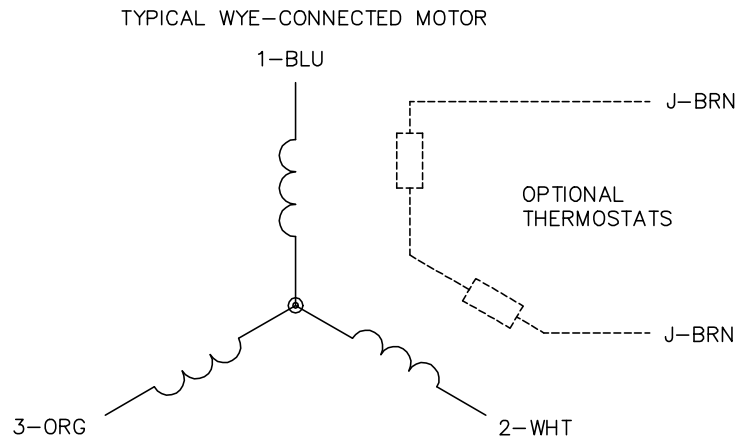

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007

REV. LTR: E

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\141

REVISED: 10: 24: 49 02/19/2019

BY: ENBRIRO

MTL: -



BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1