

ABB BALDOR RELIANCE III

Customer information packet

ECP84404T-4

75HP, 1185RPM, 3PH, 60HZ, 405T, A40072M, TEFC

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	405T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	75.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	C UR US CCSA US CCSAUSEEV CURUS
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Constant Torque Speed Range	10-60
Current @ Voltage	84.200 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	94.5 %
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3
Heater Indicator	No Heater
High Voltage Full Load Amps	84.2 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	G

Part Detail

Revision	-
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A40WG3693
Layout	617429-818
Eff. date	06-19-2025
CD Diagram	416820-036
Poles	06
Leads	3#4
Proprietary	False
Created date	05-16-2025

Lifting Lugs	Standard Lifting Lugs
Motor Lead Quantity/Wire Size	3 @ 4 AWG
Motor Standards	None
Motor Type	A40072M
Mounting Arrangement	F1
No Load Current	21.5 a
Number of Poles	6
Overall Length	38.19 IN
Power Factor	88
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	2.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1185 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate

NP4566													
CAT NO	ECP84404T-4			SPEC NO.		A40-0004-3693							
HP	75	AMPS		84.2		VOLTS		460		DESIGN		B	
FRAME SIZE	405T	RPM		1185		HZ		60	AMB		40	SF 1.15	
D.E. BRG.DATA	6316			O.D.E. BRG.DATA			6316			PH	3	DUTY CONT INSUL.CLASS	
D.E. BRG.	80BC03J30X			TYPE ENCL		TEFC		CODE		G			
O.D.E. BRG.	80BC03J30X			POWER FACTOR				88		NEMA-NOM-EFFICIENCY 94.5			
3/4 LOAD EFF.	94.9	IP	56	MAX CORR KVAR				12		GUARANTEED EFFICIENCY 93.6			
TEMP CODE	T3	TEMP =		200									
CHP HZ	60-90	CT HZ		10-60		VT HZ		0-60					
INVERTER-TEMP-CODE	T3												
SER.NO.				MOTOR WEIGHT									

000613007EX				
CAT NO	ECP84404T-4	SPEC NO.	A40-0004-3693	
NO. ROTOR BARS	71	GREASE TYPE	POLYREX EM	
NO. SLOTS	90	NL AMPS AT RATED VOLTAGE		21.5
5 YEAR WARRANTY		WINDING RES @25 C	.096	OHMS
MFG. DATE		SER.NO		


Parts List

Part number	Description	Quantity
SA438662	SA A40-0004-3693	1.000 ea
RA431033	RA A40-0004-3693	1.000 ea
NP4566	SS INV IEEE841-2021,CLI DIV2,CURUS-E,CSA	1.000 ea
000613007EX	SS IEEE 841 EMBOSSED AUXILIARY NAMEPLATE	1.000 ea
000692000FF	N/P	1.000 ea
000692000JP	N/P	1.000 ea
000692000VD	LABEL WARNING	1.000 ea
000692000VH	N/P (RELEASE 1000 PCS)	1.000 ea
004824015A	GREASE POLYREX EM	0.884 lb
032018008CK	HHCS 3/8-16X1L PLATED	4.000 ea
032018020EK	HHCS 5/8-11X2-1/2 PLTD.	4.000 ea
032018024CK	HHCS 3/8-16X3 PLTD.	3.000 ea
034000014AB	WSH ID.406 OD.812 TH.065	4.000 ea
034180008DA	KEY 1/4X1/4X1 L (shipping)	1.000 ea
034530052BB	PP NIPP DE GRS F	1.000 ea
034530052AB	P/NIP 1/8X6-1/2 Zinc	1.000 ea
034631002AB	BUSH 1/4 TO 1/8 PLTD.	1.000 ea
035000001G	GREASE RELIEF FITTING, ALEMITE 317400	1.000 ea
078550001H	FAN KB 120/60 360	1.000 ea
083198101A	G400 STD FAN COVER MACHINING	1.000 ea
089412501C	G400 MACH 6316 FT MT BRKT 089412500WCA	1.000 ea
410700000DA	WAVY SPRING WASHER	1.000 ea
415028079G	SEAL,,625 WIDE,316 BRG	1.000 ea
415072001B	CLAMP	1.000 ea
415096002A	CPLG 1/8 HEX TYPE	1.000 ea
423709011C	WASHER	3.000 ea
032018020EK	HHCS 5/8-11X2-1/2 PLTD.	4.000 ea
032018024CK	HHCS 3/8-16X3 PLTD.	3.000 ea
034530040AB	P/NIP 1/8X5 GALV.	1.000 ea
034530040BB	P/NIP 1/4X5	1.000 ea
034631002AB	BUSH 1/4 TO 1/8 PLTD.	1.000 ea

035000001G	GREASE RELIEF FITTING, ALEMITE 317400	1.000 ea
089412501C	G400 MACH 6316 FT MT BRKT 089412500WCA	1.000 ea
415028079G	SEAL,,625 WIDE,316 BRG	1.000 ea
415096002A	CPLG 1/8 HEX TYPE	1.000 ea
423709011C	WASHER	3.000 ea
032018010CK	HHCS 3/8-16X1-1/4 PLTD. 032018010CR	4.000 ea
033512008LB	HHTTS 1/4-20X1 PLATED	4.000 ea
034000014AB	WSH ID.406 OD.812 TH.065	4.000 ea
035000001A	ALFTG 1/8" 1610-BL	1.000 ea
035000001A	ALFTG 1/8" 1610-BL	1.000 ea
067053000B	GASK 320-400	1.000 ea
076708000BB	CONDUIT BOX-360	1.000 ea
076709000A	C/B Cover - 360	1.000 ea
406099000A	PLUG - FAN COVER 320-440	1.000 ea
415000115H	T/LUG #2AWG-4/0AWG	1.000 ea
415039016A	TERBD, 360-400	1.000 ea
418150003A	GREASE FITTING CAP	1.000 ea
418150003A	GREASE FITTING CAP	1.000 ea
033775004EA	DRSCR #6-1/4 304 S.S.	4.000 ea
034180044JA	KEY 3/4X3/4X5-1/2 L	1.000 ea
MG1025N19	WILKO 778.50 BLUE GREEN - 55 GAL DRUMS	0.375 ga
004824003CBY	WILKO PAINT 060.02 - ACTIVATOR	0.063 ga
482403003BEF	RUST VETO 342	0.013 ga
MG1500G03-5	LACQUER PRIMER, GRAY	0.063 ga
421948051	LABEL, MYLAR	1.000 ea
604797045	STD. 400 FRAME SKID	1.000 ea
000613006PU	N/P (RELEASE QTY 10,000) UL CSA LABEL	1.000 ea
LB1449	DIV-2/NEC WARNING LABEL	1.000 ea
032018005DL	1/2-13 X 5/8 SILICON BRONZE HHCS	1.000 ea
412118006A	DRAIN	2.000 ea

REL. S.O.	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	405LP	75	P	3/60	1185	460
AMPS	DUTY	AMB °C/ INSUL.	S.F.	NEMA DESIGN	CODE LETTER	ENCL.
84.2	CONT	40/F	1.15	B	G	TEFC
E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)		
-	418142073DE	---	---	.0964		
PERFORMANCE						
LOAD	HP	AMPERES	RPM	% POWER FACTOR	% EFFICIENCY	
NO LOAD	0	21.5	1200	5.80	0	
1/4	18.8	29.4	1196	64.6	92.6	
2/4	37.5	44.9	1193	82.6	94.8	
3/4	56.2	63.6	1189	87.2	94.9	
4/4	75.0	84.2	1184	88.3	94.5	
5/4	93.8	106	1180	88.7	93.8	
SPEED TORQUE						
		RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES	
LOCKED ROTOR		0	167	557	537	
PULL UP		180	142	471	513	
BREAKDOWN		1117	250	832	312	
FULL LOAD		1184	100	333	84.2	
AMPERES SHOWN FOR 460. VOLT CONNECTION. IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE						
REMARKS: TYPICAL DATA 94.5 PCT NOMINAL EFFICIENCY						
		DR. BY R.K. BRIDGES		A-C MOTOR PERFORMANCE A40WG3693-R001 DATA ISSUE DATE 05/10/21		
		CK. BY W.L. SMITH				
		APP. BY W. L. SMITH				
		DATE 06/09/14				
				Page 2 of 1		

REL S.O.	RPM 1185	S.F. 1.15	ROTOR 418142073DE
FRAME 405LP	VOLTS 460	NEMA DESIGN B	TEST S.O. TYPICAL DATA
HP 75	AMPS 84.2	CODE LETTER G	TEST DATE ---
TYPE P	DUTY CONT	ENCLOSURE TEFC	STATOR RES. @ 25 °C .0964
PHASE/HERTZ 3/60	AMB °C/INSUL 40/F	E/S -	OHMS (BETWEEN LINES)

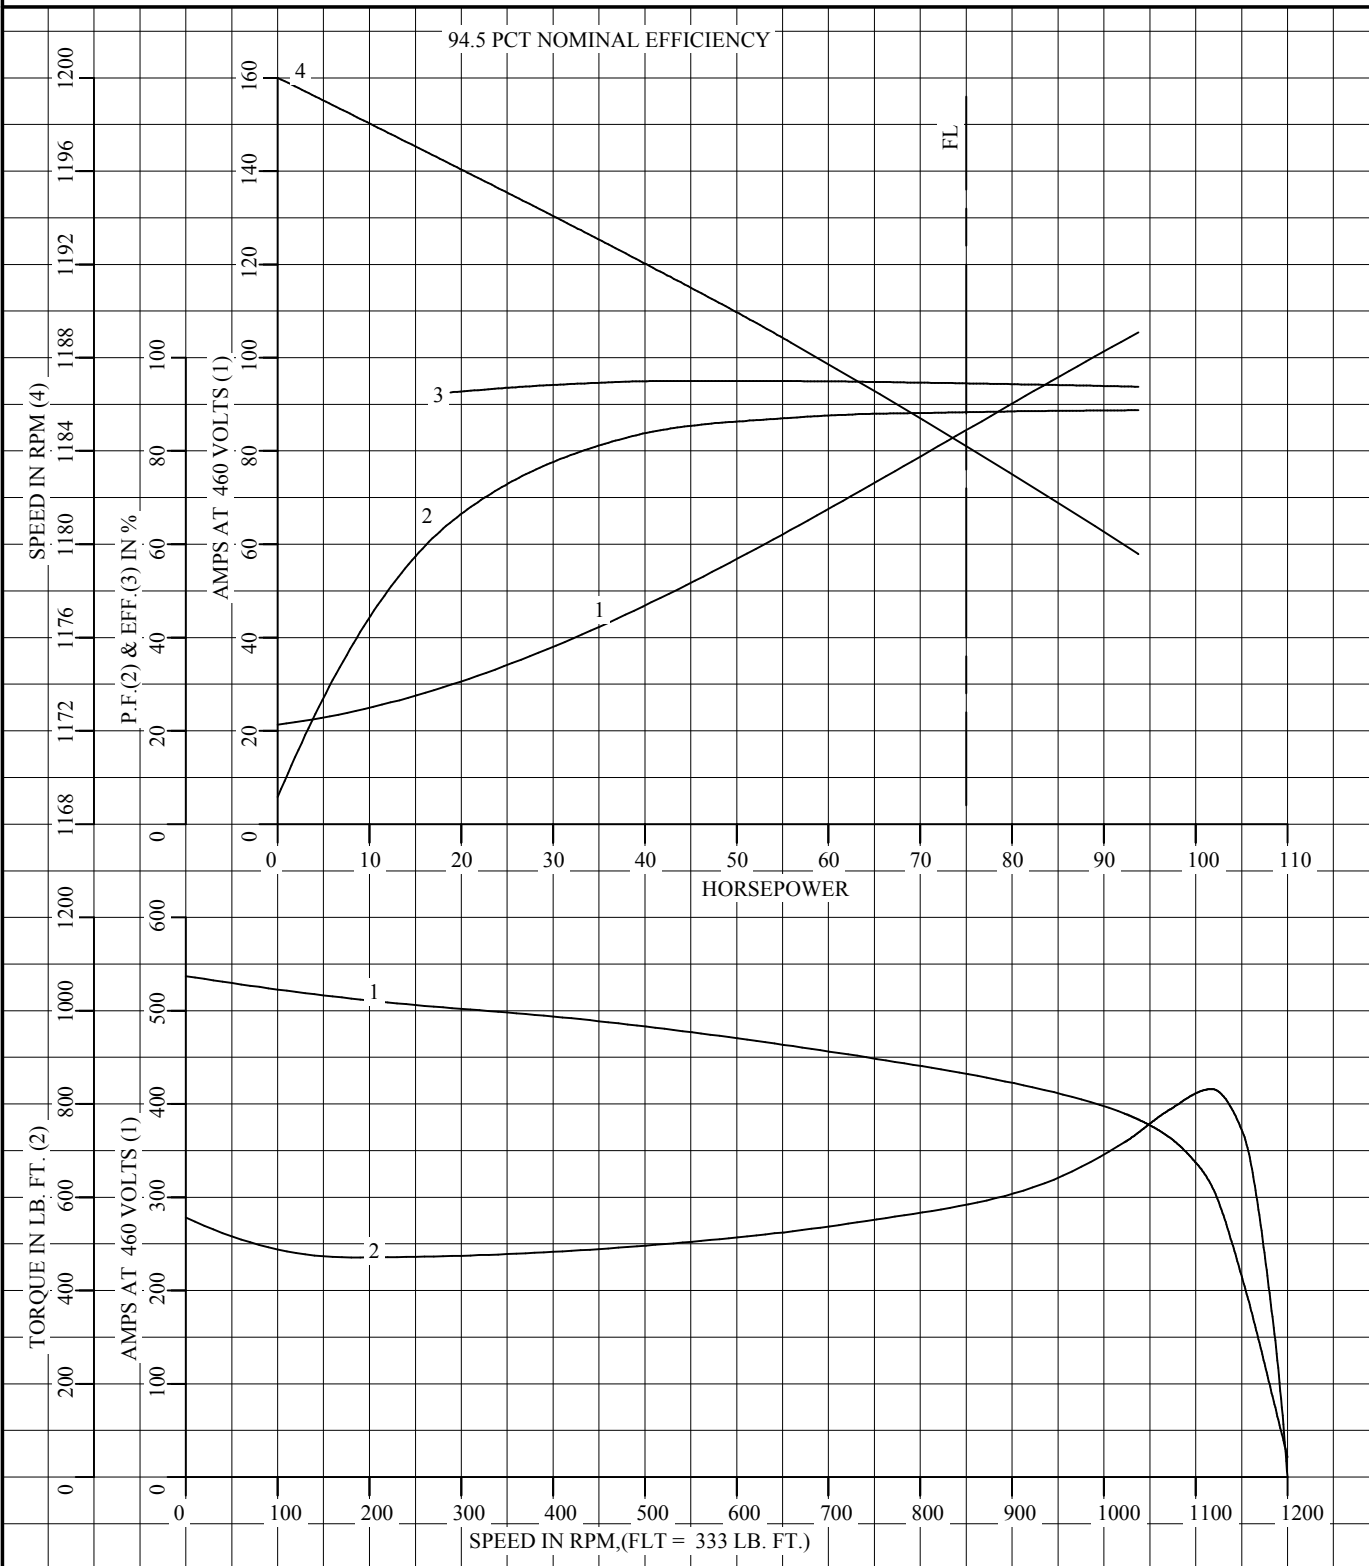

AMPERES SHOWN FOR 460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

BALDOR
A MEMBER OF THE ABB GROUP

DR. BY R.K. BRIDGES
CK. BY W.L. SMITH
APP. BY W.L. SMITH
DATE 06/09/14

**A-C MOTOR
PERFORMANCE
CURVES**

A40WG3693-R001

ISSUE DATE 05/10/21

Page 9 of 13

REL. S.O.

RPM **1185**

S.F. **1.15**

ROTOR **418142073DE**

FRAME **405LP**

VOLTS **460**

NEMA DESIGN **B**

TEST S.O. **TYPICAL DATA**

HP **75**

AMPS **84.2**

CODE LETTER **G**

TEST DATE **---**

TYPE **P**

DUTY **CONT**

ENCLOSURE **TEFC**


STATOR RES. @ 25 °C **.0964**

PHASE/HERTZ **3/60**

AMB °C/INSUL **40/F**

E/S **-**

OHMS (BETWEEN LINES)

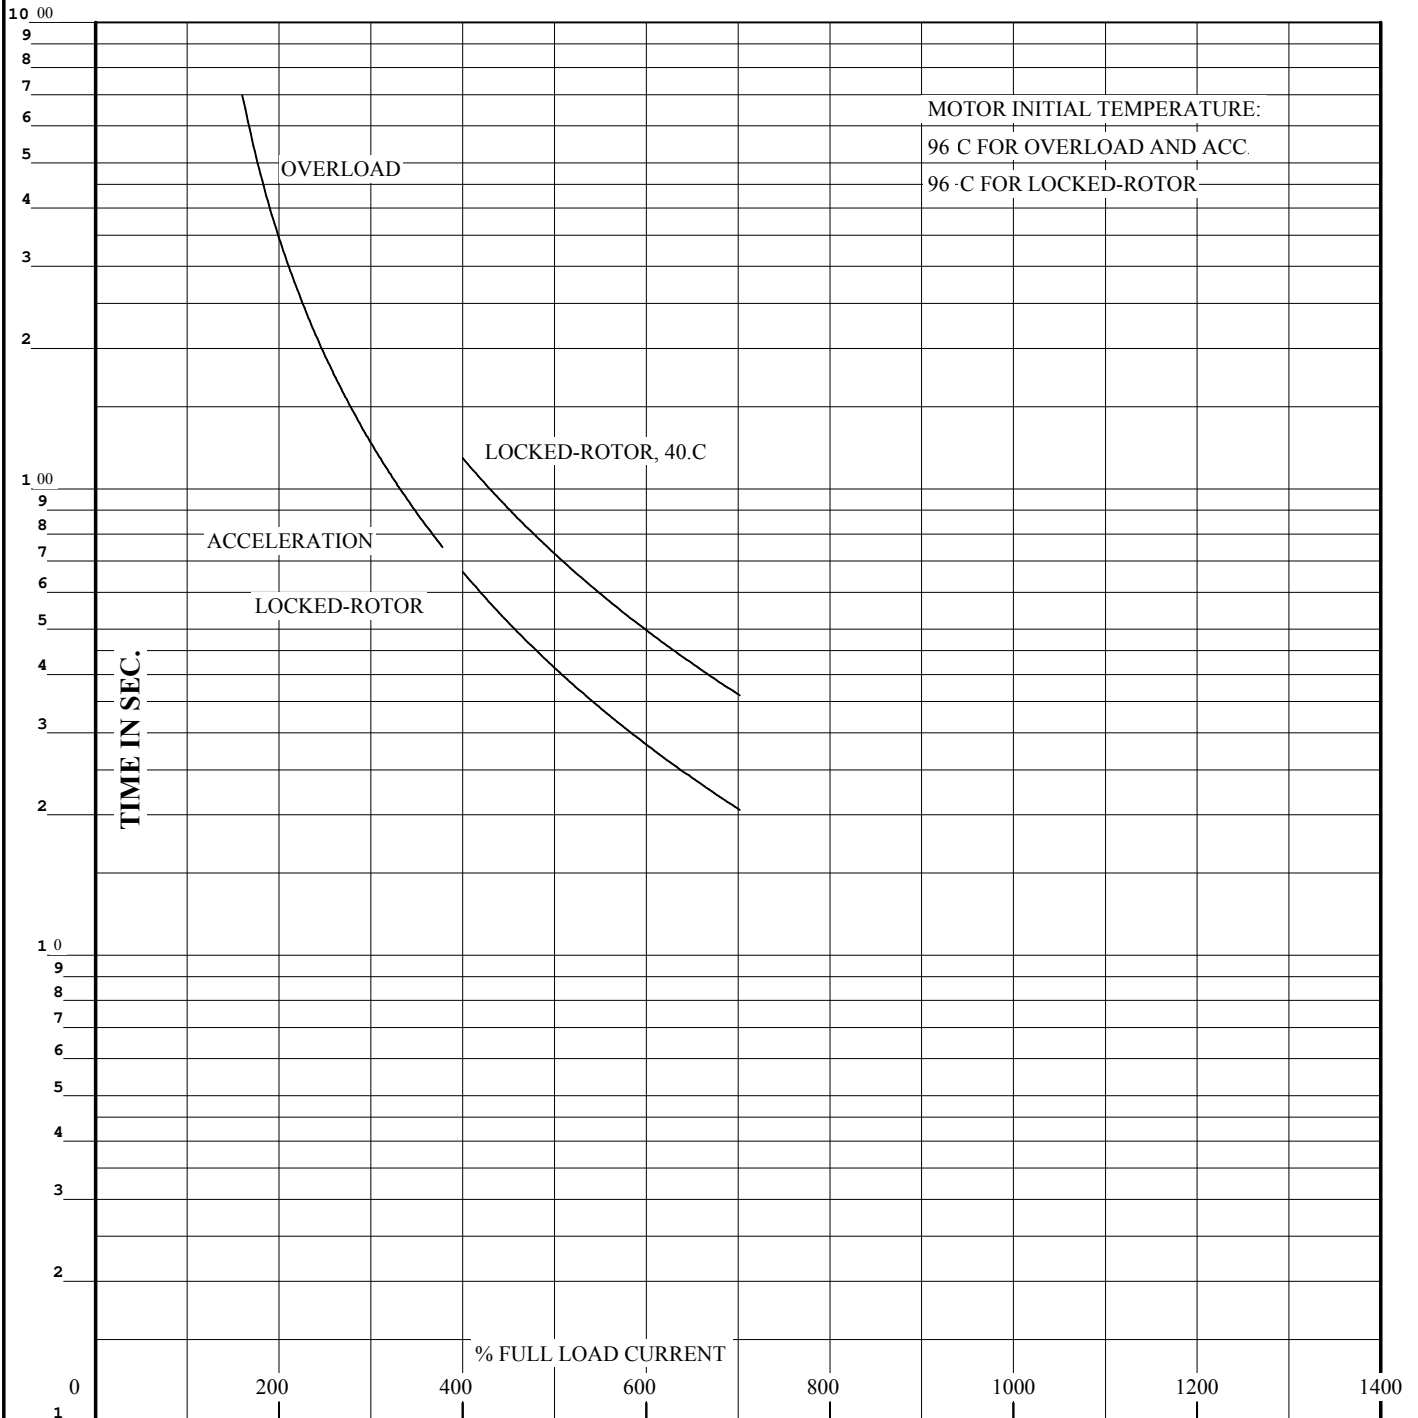

THERMAL LIMIT CURVE

REMARKS: 94.5 PCT NOMINAL EFFICIENCY


AMPERES SHOWN FOR 460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.


BALDOR
A MEMBER OF THE ABB GROUP

DR. BY R.K. BRIDGES
CK. BY W.L. SMITH
APP. BY W.L. SMITH
DATE 06/09/14

**A-C MOTOR
PERFORMANCE
CURVES**
A40WG3693-R001


ISSUE DATE 05/10/21 Page 10 of 13

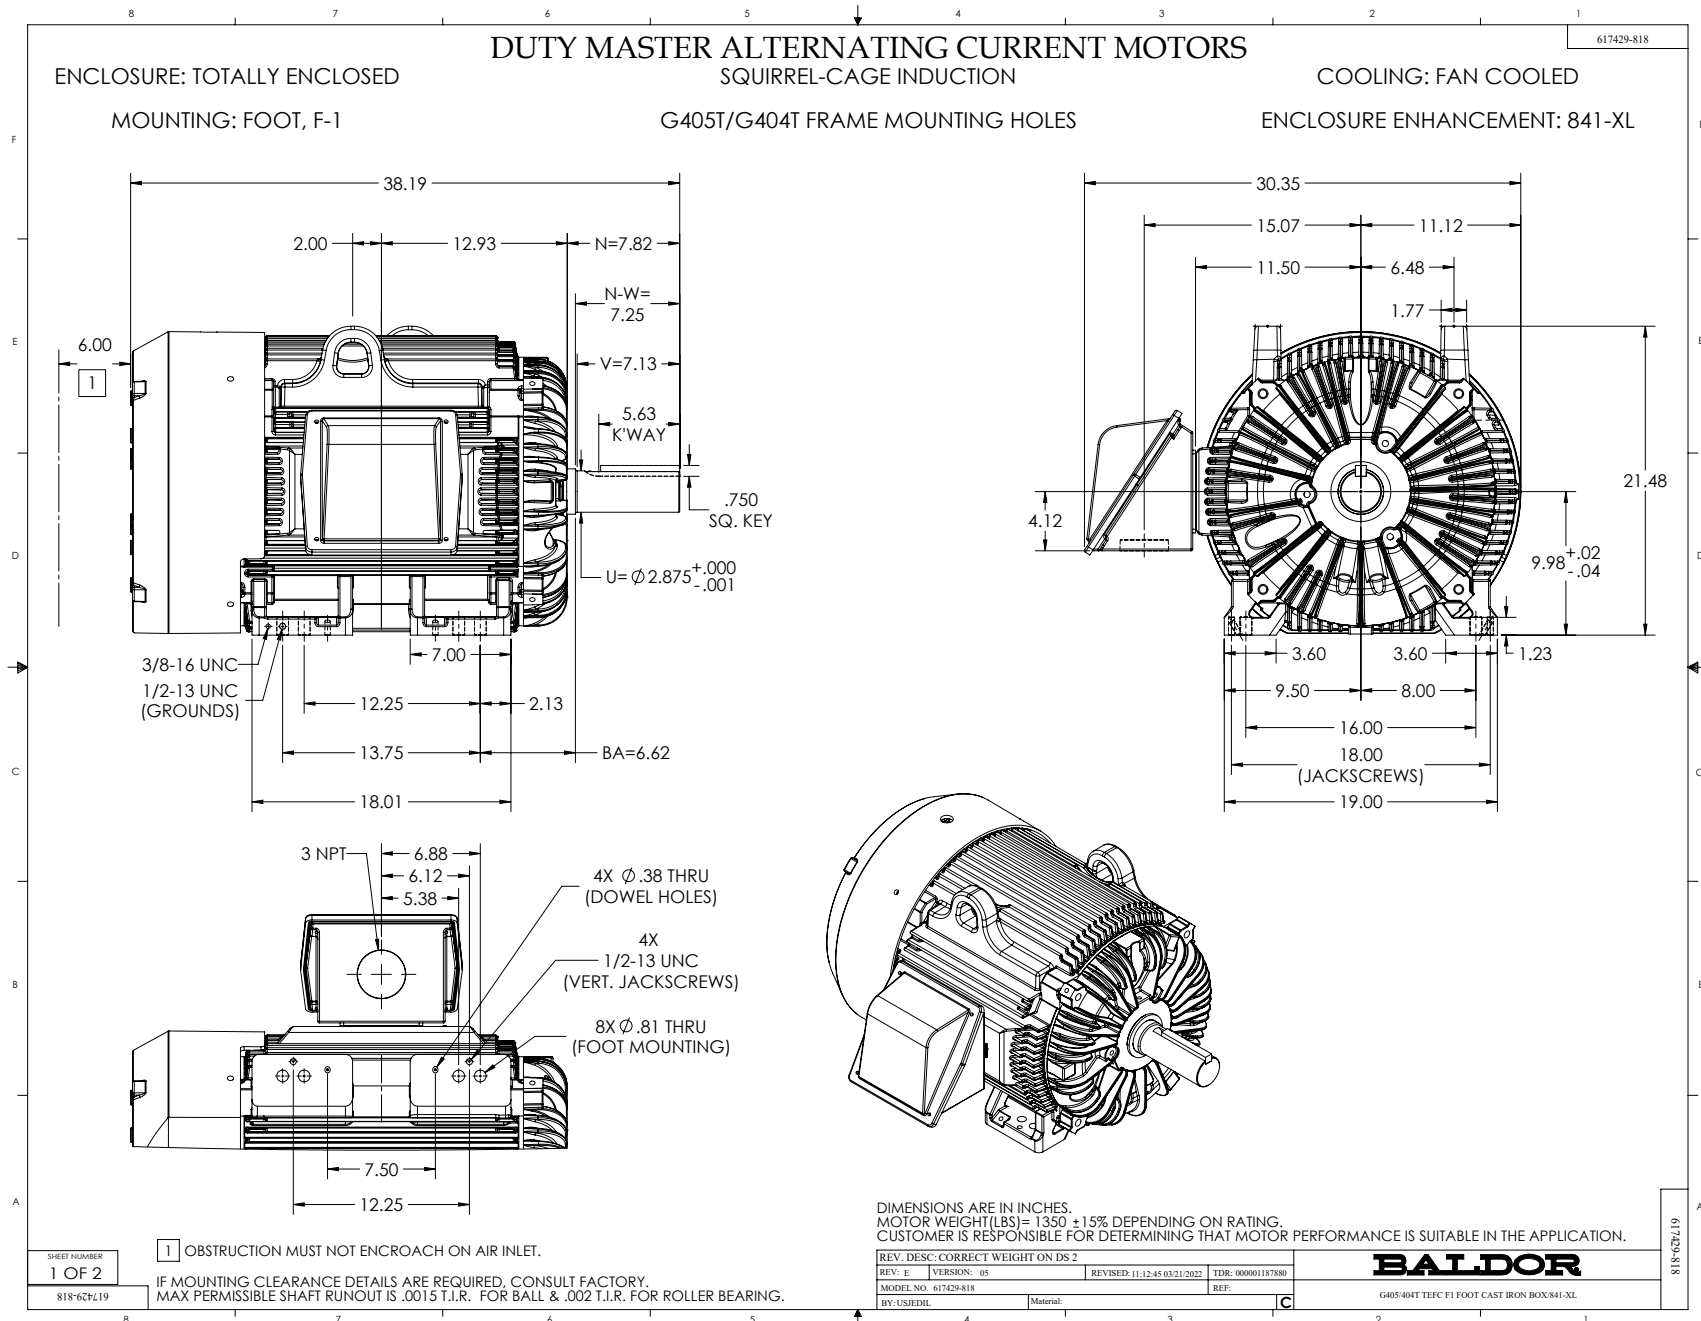

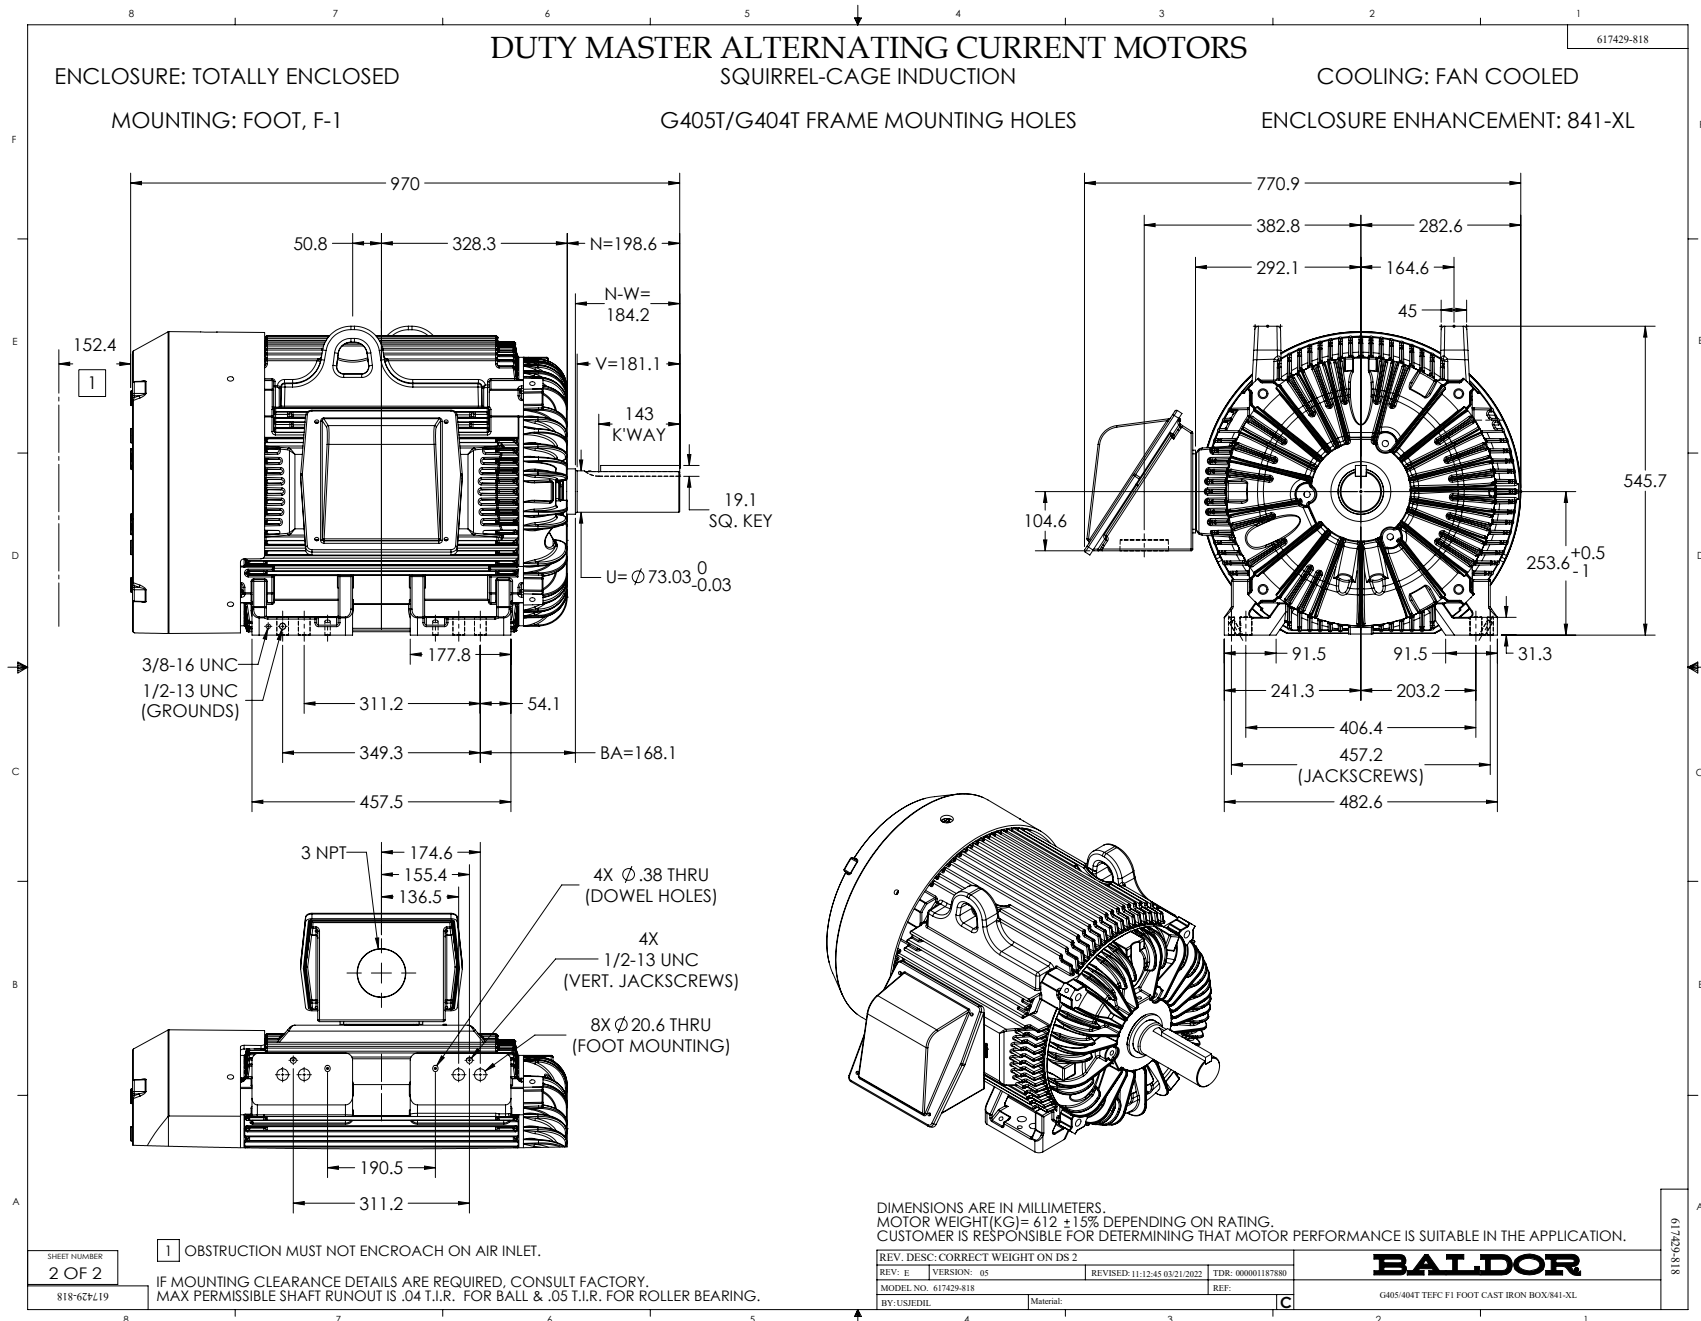

416820-036

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 3 LEAD CONNECTED

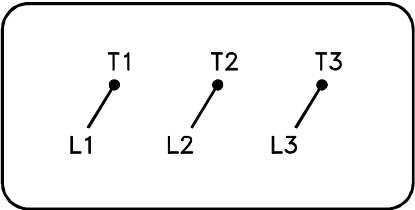

(N.P. 1575-BA)

416820-036

REV. DESC: LOADED TO BUS, C/R 335225		
REV. LTR: -	VERSION: 00	TDR: 000000538207
FILE: \MGA\00000\682		REVISED: 11: 54: 06 04/30/2010
MTL: -		BY: RAGRA

BALDOR

CONN DIAG - STANDARD 3 LEAD
SH 1 of 1