ABB BALDOR RELIANCE

Customer information packet

EGDM4103T

25HP, 1775RPM, 3PH, 60HZ, 284TZ, 1054M, TEFC, F
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/3/2026 5:02:32 PM

Specifications

Enclosure	TEFC
Frame	284TZ
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	25.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
	230.0 V @ 60 HZ
Agency Approvals	CSA
	CSA EEV
	UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	62.000 A @ 230.0 V
	64.000 A @ 208.0 V
	31.000 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	93.6 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None

Part Detail

Revision	M
Type	AC
Mech. spec.	10K051
Base	
Status	PRD/A
Elec. spec.	10WGZ651
Layout	10LYK051
Eff. date	09-10-2025
CD Diagram	CD0180
Poles	04
Leads	9#8 72" LONG Y
Proprietary	False
Created date	10-19-2017

Heater Indicator	No Heater
High Voltage Full Load Amps	31.0 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 8 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	1054M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	28.76 IN
Power Factor	81
Product Family	General Purpose
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.875 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1775 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	NONE (OLD)
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2	None

Nameplate

NP3126L									
CAT.NO.	EGDM4103T								
SPEC.	10K051Z651G1								
HP	25								
VOLTS	230/460								
AMP	62/31								
RPM	1775								
FRAME	284TZ	**HZ**	60				**PH**	3	
SER.F.	1.15	**CODE**	J	**DES**	A	**CL**	F		
NEMA-NOM-EFF	93.6	**PF**	81						
RATING	40C AMB-CONT								
CC	010A								
DE	6311	**ODE**	6309						
ENCL	TEFC	**SN**							
	SFA 69/34.5								

Parts List

Part number	Description	Quantity
SA346614	SA 10K051Z651G1	1.000 ea
RA335149	RA 10K051Z651G1	1.000 ea
09FN3001C02	EXTERNAL FAN, PLASTIC (COMES W/SCREW FRO	1.000 ea
10CB3000SP	KOBX, CAST W/2.00 LEAD HOLE	1.000 ea
09GS1000	GASKET-CONDUIT BOX, 1/16 THICK LEXIDE	1.000 ea
10XN3118K12	5/16-18 X .75 GRADE 5, ZINC PLATED	4.000 ea
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	4.000 ea
WD1000B25	GND LUG, BURNDY L125HP OR T&B L125HP-BB	1.000 ea
19XW3118G08	.31-18X.50,HEX WSHR HD,TAPTITE 2,GREEN	1.000 ea
10EP1106A55	FREP MACH W/O GREASERS, W/"O" DRAINS	1.000 ea
10XN3816K32	BOLT, 3/8-16X2 HH YZ(5)	4.000 ea
HW1001A38	LOCKWASHER 3/8, ZINC PLT .688 OD, .382 I	4.000 ea
HW5100A11	W3917-042 WVY WSHR (WB)	1.000 ea
10XN3118K40	5/16-18 X 2.50" HEX HD, GRADE 5	4.000 ea
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	4.000 ea
10EP1105A126	PU ENDPLATE, MACH	1.000 ea
10XN3816K28	3/8-16 X 1.75 HEX HD CAP SCREW, GRADE 5	4.000 ea
HW4600A49	CR #20643 SINGLE LIP SEAL	1.000 ea
HW4600B40	V-RING SLINGER 2.000 X 2.680 X .28 VITON	1.000 ea
HW1001A38	LOCKWASHER 3/8, ZINC PLT .688 OD, .382 I	4.000 ea
10FH4000	310 FAN HOUSING STAMPED, PRIMED W/O P SU	1.000 ea
51XF2520A08	SCREW, HEX SER SLT HD, ZN 1/4-20 X .50 L	4.000 ea
10CB3500	CONDUIT BOX LID, CAST	1.000 ea
10GS1000	GASKET, CONDUIT BOX LID	1.000 ea
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	4.000 ea
HW2501H36	KEY, 1/2 SQ X 4.250	1.000 ea
HA4066A01	PUSH IN T-DRAIN FITTING (BLACK)	1.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.130 lb
HA4066A01	PUSH IN T-DRAIN FITTING (BLACK)	1.000 ea
HW2500A25	WOODRUFF KEY USA #1008 #BLOW CARBON STEE	1.000 ea
MG1025C02	WILKOFAST SG, 787.105, TAN	0.050 ga

85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
LC0181	CONNECTION LABEL	1.000 ea
NP3126L	ALUM FARM DUTY SUPER-E UL CSA-EEV PREM	1.000 ea
12PA1000	PACKAGING GROUP PRINT PK1024A08	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea

AC Induction Motor Performance Data
Record # 66703
Typical performance - not guaranteed values

Winding: 10WGZ651-R001	**Type:** 1054M	**Enclosure:** TEFC

Nameplate Data				**460 V, 60 Hz: High Voltage Connection**	
Rated Output (HP)			25	**Full Load Torque**	74.02 LB-FT
Volts			230/460	**Start Configuration**	direct on line
Full Load Amps			62/31	**Breakdown Torque**	262 LB-FT
R.P.M.			1775	**Pull-up Torque**	118 LB-FT
Hz	60	**Phase**	3	**Locked-rotor Torque**	142 LB-FT
NEMA Design Code	A	**KVA Code**	J	**Starting Current**	223 A
Service Factor (S.F.)			1.15	**No-load Current**	13.6 A
NEMA Nom. Eff.	93.6	**Power Factor**	81	**Line-line Res. @ 25ºC**	0.2345 Ω
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	51°C
S.F. Amps				**Temp. Rise @ S.F. Load**	61°C
				Locked-rotor Power Factor	30.6

Load Characteristics 460 V, 60 Hz, 25 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	43	65	76	81	84	85	83
Efficiency	88.3	92.8	93.9	94	93.7	93.1	93.8
Speed	1794.1	1789.3	1783.5	1777.8	1770.8	1763.8	1774
Line amperes	15.3	19.3	24.6	30.6	37.2	44.5	34.6


ABB Motors and Mechanical Inc.


WINDING # 10WGZ651

Typical performance - not guaranteed values.


25 HP 3 PH 60 HZ 1775 RPM 460 V 1054M


TORQUES(LB-FT): PO=262 PU=118 LR=142 LRA=223

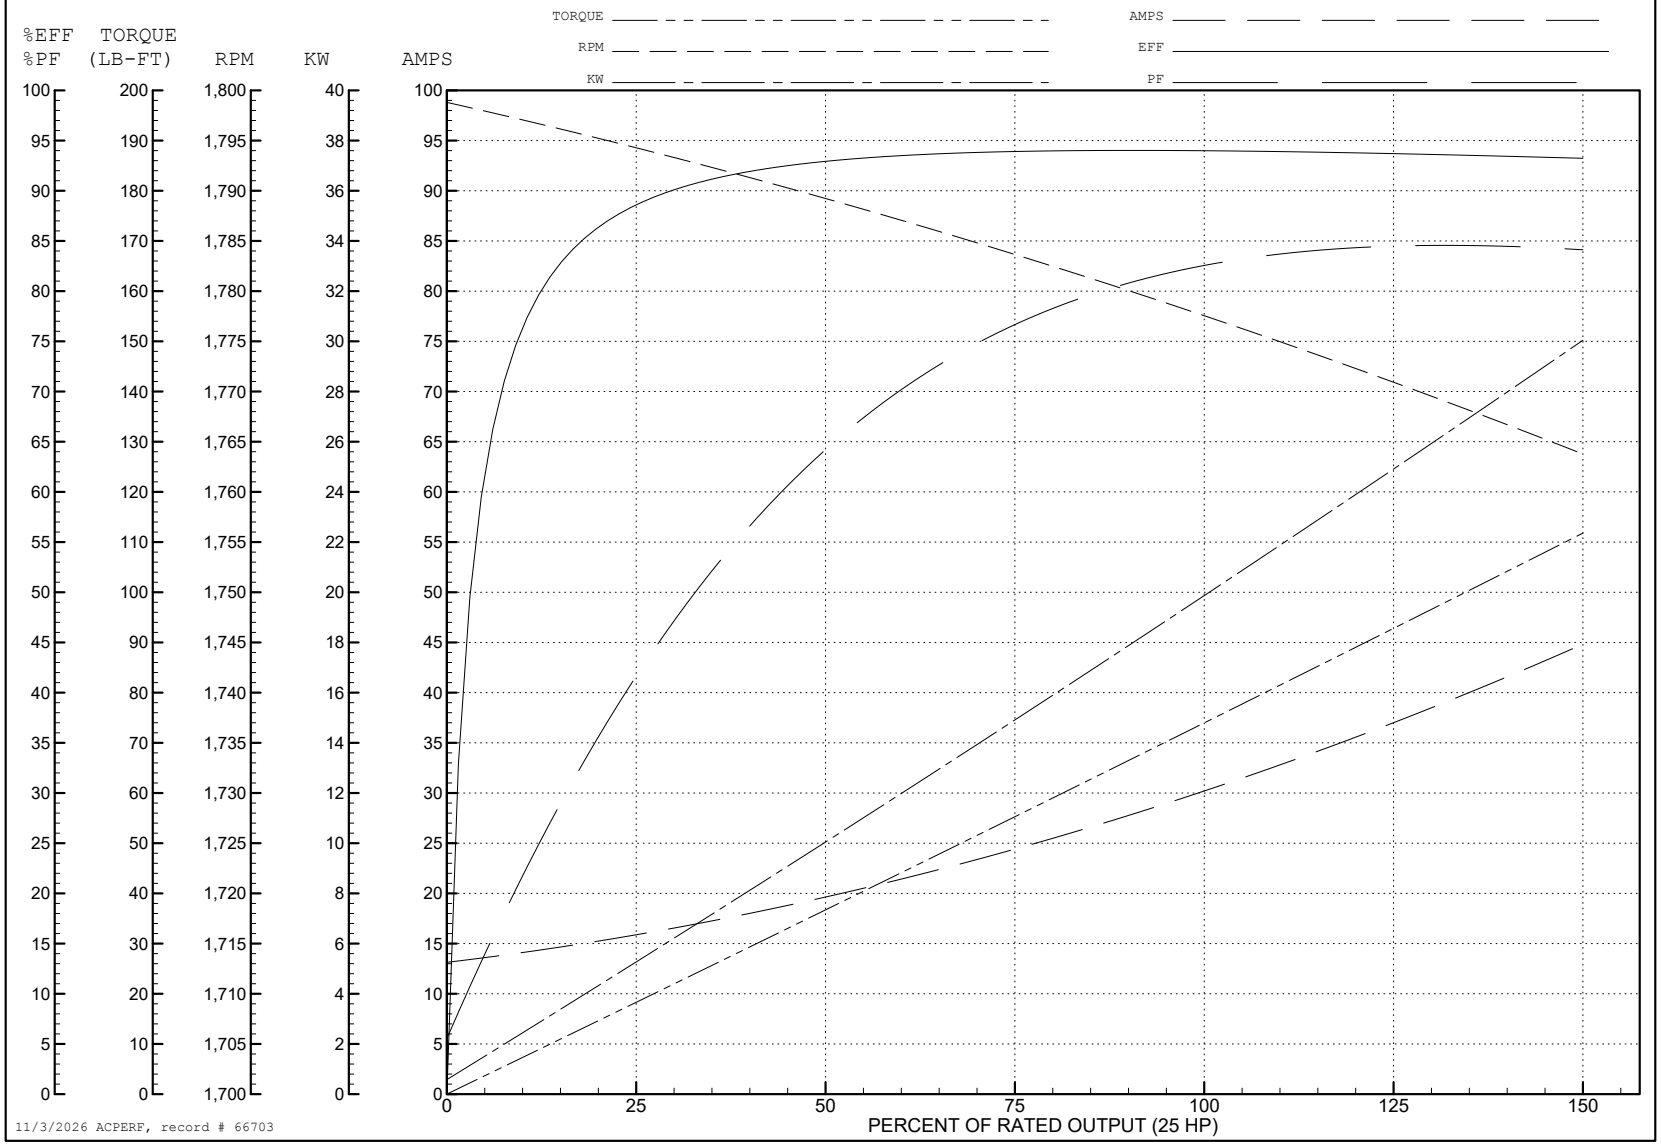

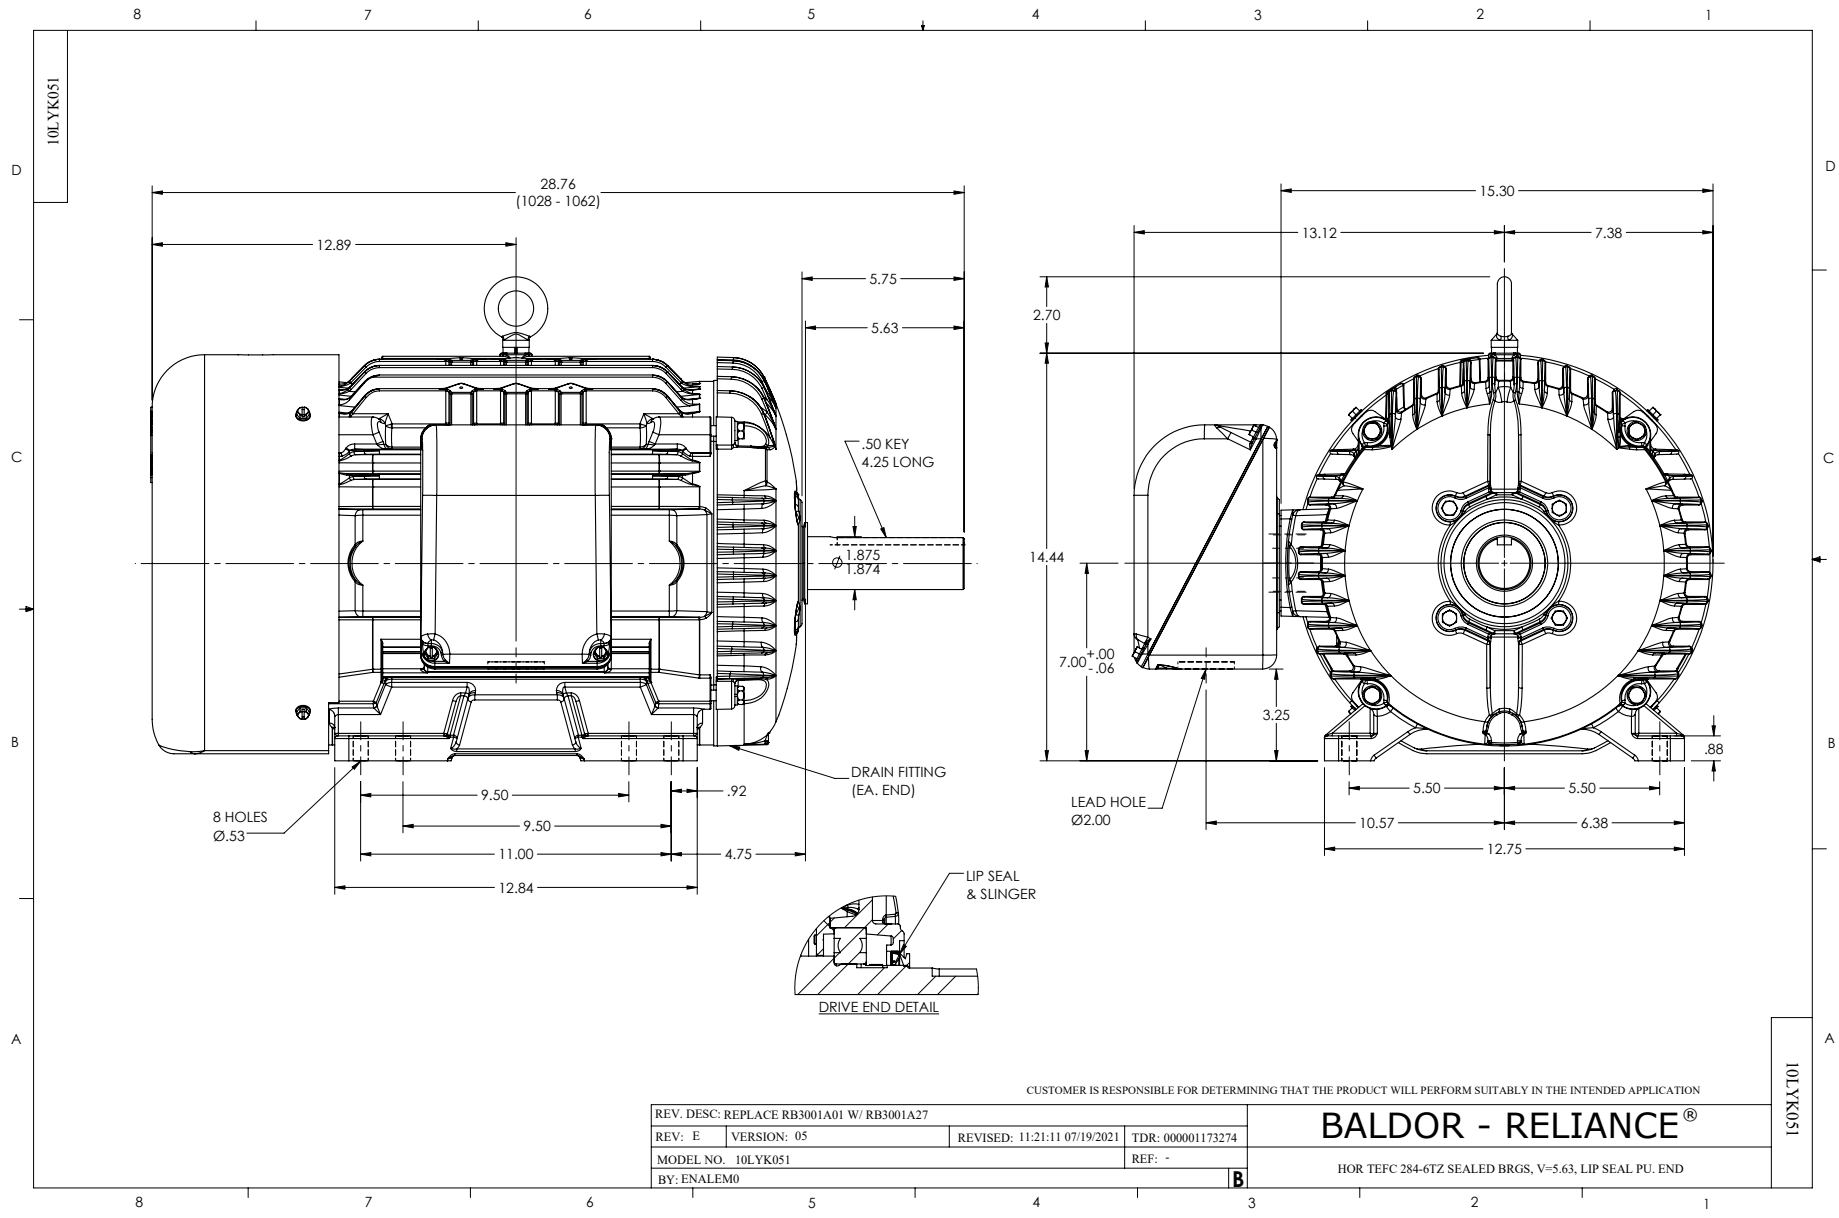
10LYK051
28.76
(1028 - 1062)
12.89
5.75
5.63
.50 KEY
4.25 LONG
Ø 1.875
1.874
8 HOLES
Ø.53
9.50
9.50
11.00
12.84
.92
4.75
DRAIN FITTING
(EA. END)
LIP SEAL
& SLINGER
DRIVE END DETAIL
15.30
13.12
7.38
2.70
14.44
7.00 +.00 -.06
3.25
.88
LEAD HOLE
Ø2.00
5.50
5.50
10.57
6.38
12.75
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: REPLACE RB3001A01 W/ RB3001A27
REV: E
VERSION: 05
REVISED: 11:21:11 07/19/2021
TDR: 000001173274
MODEL NO. 10LYK051
REF: -
BY: ENALEM0
B
BALDOR - RELIANCE®
HOR TEFC 284-6TZ SEALED BRGS, V=5.63, LIP SEAL PU. END
10LYK051

CD0180

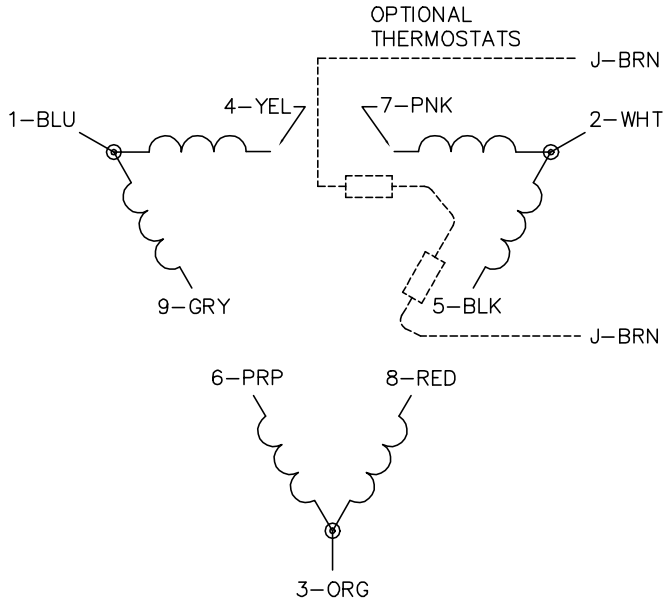

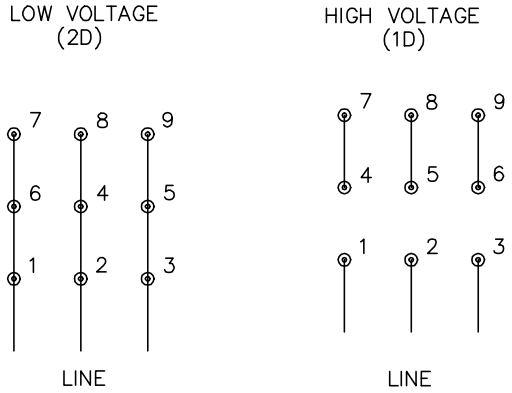

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: D	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\148	REVISED: 10:25:29 02/19/2019	BY: ENBRIR0
MTL: –		

BALDOR - RELIANCE®

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1