

ABB BALDOR RELIANCE III

Customer information packet

EL11306A

.75HP, 3450RPM, 1PH, 60HZ, 56, 3428LC, OPEN, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	OPEN
Frame	56
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	.750 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 115.0 V @ 60 HZ
Agency Approvals	CURUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	6.300 A @ 115.0 V 4.700 A @ 208.0 V 3.300 A @ 230.0 V
Design Code	N
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	76.2 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	3.3 a

Part Detail

Revision	G
Type	AC
Mech. spec.	34F353
Base	
Status	PRD/A
Elec. spec.	34WGR220
Layout	34LYF353
Eff. date	12-31-2024
CD Diagram	CD0320
Poles	02
Leads	6#18,1#16 #4TH
Proprietary	False
Created date	09-15-2015

Insulation Class	B
Inverter Code	Not Inverter
KVA Code	J
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	6 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3428LC
Mounting Arrangement	F1
Number of Poles	2
Overall Length	11.00 IN
Power Factor	95
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.25
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	Automatic Thermal Overload
Winding Thermal 1 Location	SB

Winding Thermal 2

None

Nameplate

NP3273L											
CAT.NO.	EL11306A										
SPEC.	34F353R220G1										
HP	.75										
VOLTS	115/230										
AMP	6.3/3.3										
RPM	3450										
FRAME	56		HZ	60				PH	1		
SER.F.	1.25		CODE	J	DES	N		CL	B		
F.L. AVG. EFF.	76.2		PF	95							
RATING	40C AMB-CONT										
CC											
DE	6203		ODE	6203							
ENCL	OPEN		SN								
	SFA 8.4/4.2										

Parts List

Part number	Description	Quantity
SA307566	SA 34F353R220G1	1.000 ea
RA294871	RA 34F353R220G1	1.000 ea
OC3030F11SP	CAPACITOR 30 MFD 370 VAC	1.000 ea
EC1400A03SP	ELEC CAP, 400-480 MFD, 125V, 1.81D X 3.	1.000 ea
WD3006A01	RSS-2-103JT 2W 10K RES. METAL OXIDE 5%	1.000 ea
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 ea
34CB3002A	CB CAST W/.88 DIA HOLE	1.000 ea
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	2.000 ea
SP1006A01	INSULATOR MODEL 35 SWITCH	1.000 ea
34EP3210A01SP	FR ENDPLATE, MACH	1.000 ea
34CB3801	CAPACITOR BOX, DIE CAST	1.000 ea
51XB1214A08	12-14 X 1/2HX WS SL SR TYBX	2.000 ea
34GS5003A01	FOAM SLEEVE, ID = 2 1/16" X 4 3/8"	1.000 ea
HW5100A03	WAVY WASHER (W1543-017)	1.000 ea
34EP3212A02	PU ENDPLATE, MODEL 34 OPEN	1.000 ea
XY1032A02	10-32 HEX NUT DIRECTIONAL SERRATION	4.000 ea
34CB4517	CB LID 4 MTG HOLES .22 DIA STAMPED, FOR	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 ea
HW2501D13	KEY, 3/16 SQ X 1.375	1.000 ea
HA7000A04	KEY RETAINER 0.625 DIA SHAFTS	1.000 ea
WD1000A41	AMP TERMINAL 62418-2	2.000 ea
MG1050Y01	CELEROL BALDOR GOLD *5 GALLON BUCKET*	0.014 ga
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
SP5181A01	MODEL 35 TORQ STATIONARY SWITCH LEAD ASS	1.000 ea
HA3100A45	THRUBOLT 10-32 X 8.875	4.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
LB1118	LABEL,WARNING (ROLL LABEL)	1.000 ea
LC0269	1PH,DV,REV,THERMAL,7 LD,L.AMP THRU HTR H	1.000 ea
NP3273L	ALUM SUPER-E THERMALLY PROTECTED, LASER	1.000 ea

35PA1066	PKG GRP, PRINT PK1008A07	1.000 ea
----------	--------------------------	----------

AC Induction Motor Performance Data

Record # 52884

Typical performance - not guaranteed values

Winding: 34WGR220-R001			Type: 3428LC		Enclosure: OPEN	
Nameplate Data			230 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		.75	Full Load Torque		1.14 LB-FT	
Volts		115/230	Start Configuration		direct on line	
Full Load Amps		6.3/3.3	Breakdown Torque		3.88 LB-FT	
R.P.M.		3450	Pull-up Torque		2.07 LB-FT	
Hz	60 Phase	1	Locked-rotor Torque		3.92 LB-FT	
NEMA Design Code		N KVA Code	Starting Current		24.8 A	
Service Factor (S.F.)		1.25	No-load Current		0.961 A	
NEMA Nom. Eff.		76.2 Power Factor	Line-line Res. @ 25°C		2.4012 Ω A Ph 2.118 Ω B Ph	
Rating - Duty		40C AMB-CONT	Temp. Rise @ Rated Load		12°C	
S.F. Amps		8.4/4.2	Temp. Rise @ S.F. Load		16°C	

Load Characteristics 230 V, 60 Hz, 0.75 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	77	89	93	95	95	95	95
Efficiency	62.6	74.2	78.2	77.5	76.1	74.7	76.1
Speed	3567.6	3537.1	3504.2	3465	3419.8	3372.1	3420
Line amperes	1.23	1.84	2.51	3.32	4.21	5.14	4.21


ABB Motors and Mechanical Inc.

WINDING # 34WGR220

Typical performance - not guaranteed values.

0.75 HP 1 PH 60 HZ 3450 RPM 230 V 3428LC

TORQUES (LB-FT): PO=3.88 PU=2.07 LR=3.92 LRA=24.8

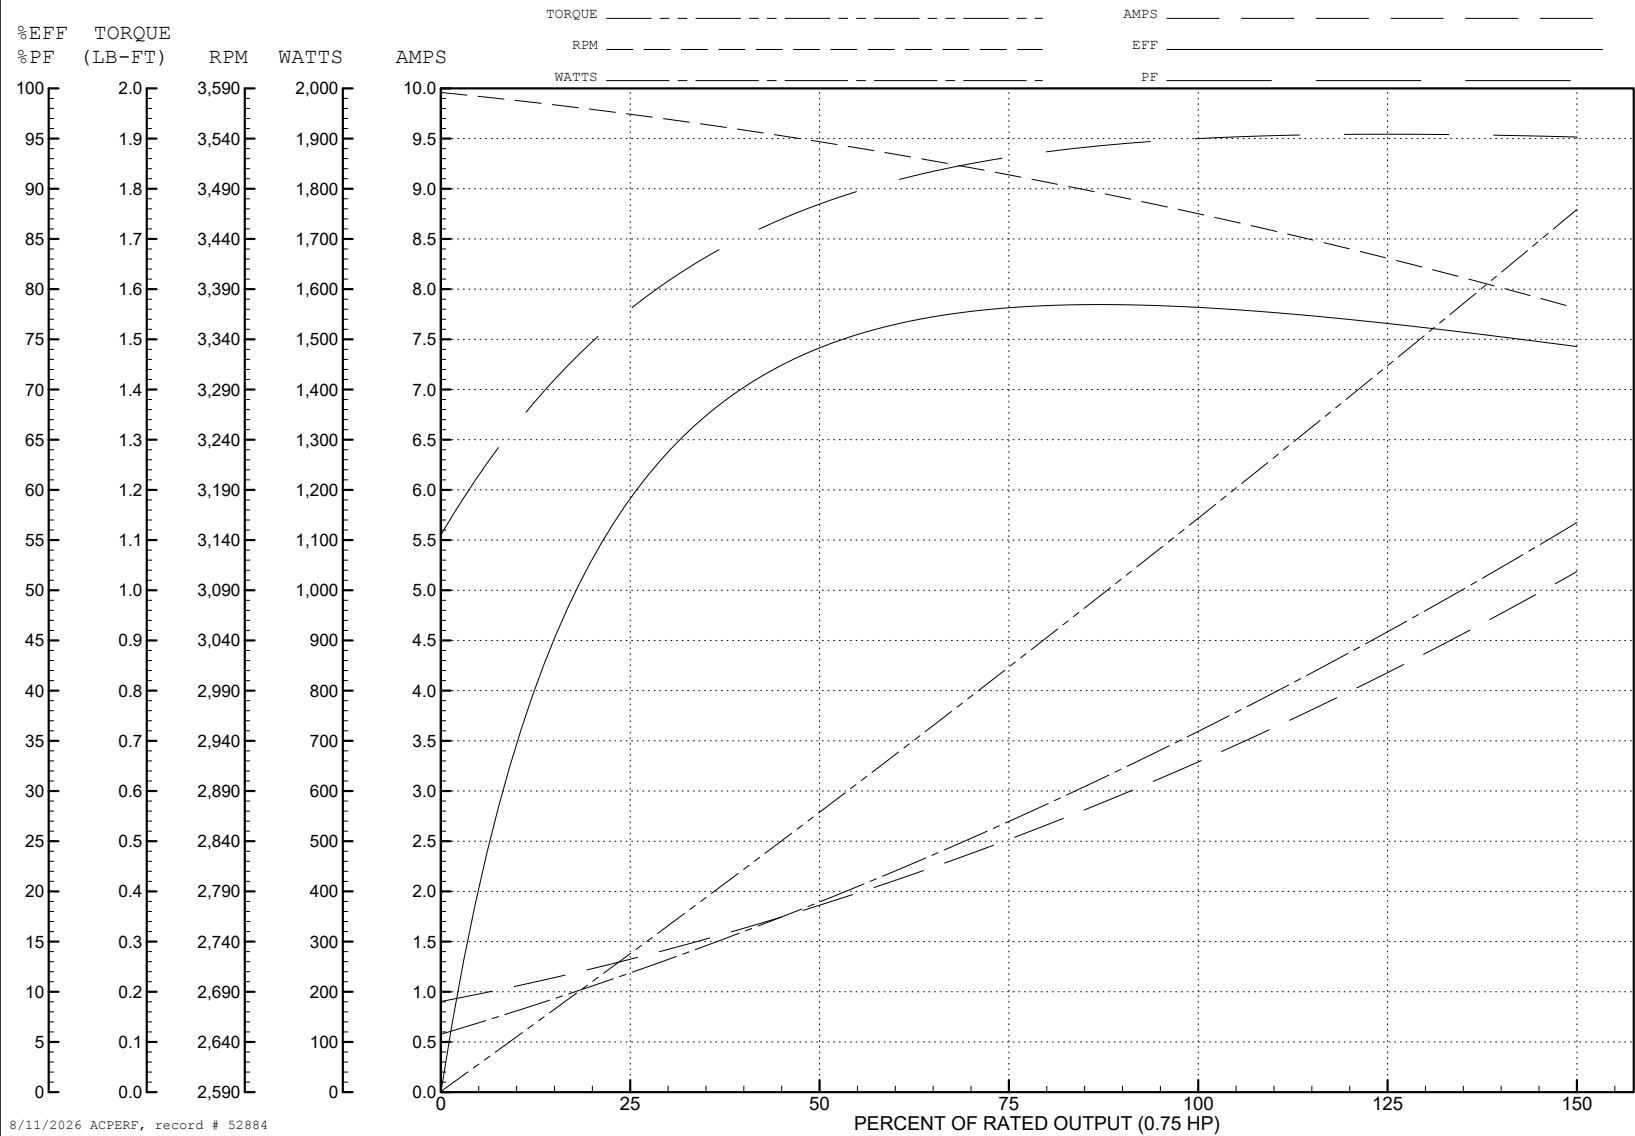

AC Induction Motor Performance Data

Record # 52885

Typical performance - not guaranteed values

Winding: 34WGR220-R001			Type: 3428LC		Enclosure: OPEN		
Nameplate Data				115 V, 60 Hz: Low Voltage Connection			
Rated Output (HP)		.75		Full Load Torque		1.13 LB-FT	
Volts		115/230		Start Configuration		direct on line	
Full Load Amps		6.3/3.3		Breakdown Torque		3.28 LB-FT	
R.P.M.		3450		Pull-up Torque		2.55 LB-FT	
Hz	60	Phase	1	Locked-rotor Torque		3.81 LB-FT	
NEMA Design Code		N	KVA Code	J		Starting Current	49.8 A
Service Factor (S.F.)		1.25		No-load Current		1.82 A	
NEMA Nom. Eff.		76.2	Power Factor	95	Line-line Res. @ 25°C		0.58846 Ω A Ph 2.1681 Ω B Ph
Rating - Duty		40C		AMB-CONT		Temp. Rise @ Rated Load	27°C
S.F. Amps		8.4/4.2		Temp. Rise @ S.F. Load		36°C	

Load Characteristics 115 V, 60 Hz, 0.75 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	80	89	93	94	95	95	95
Efficiency	60.3	73.2	77.3	78.2	77.3	74.8	77.3
Speed	3570	3543.5	3508.4	3477.4	3436.9	3387.6	3437
Line amperes	2.54	3.7	5.12	6.53	8.27	10.3	8.27


ABB Motors and Mechanical Inc.

WINDING # 34WGR220


Typical performance - not guaranteed values.

0.75 HP 1 PH 60 HZ 3450 RPM 115 V 3428LC


TORQUES (LB-FT): PO=3.28 PU=2.55 LR=3.81 LRA=49.8

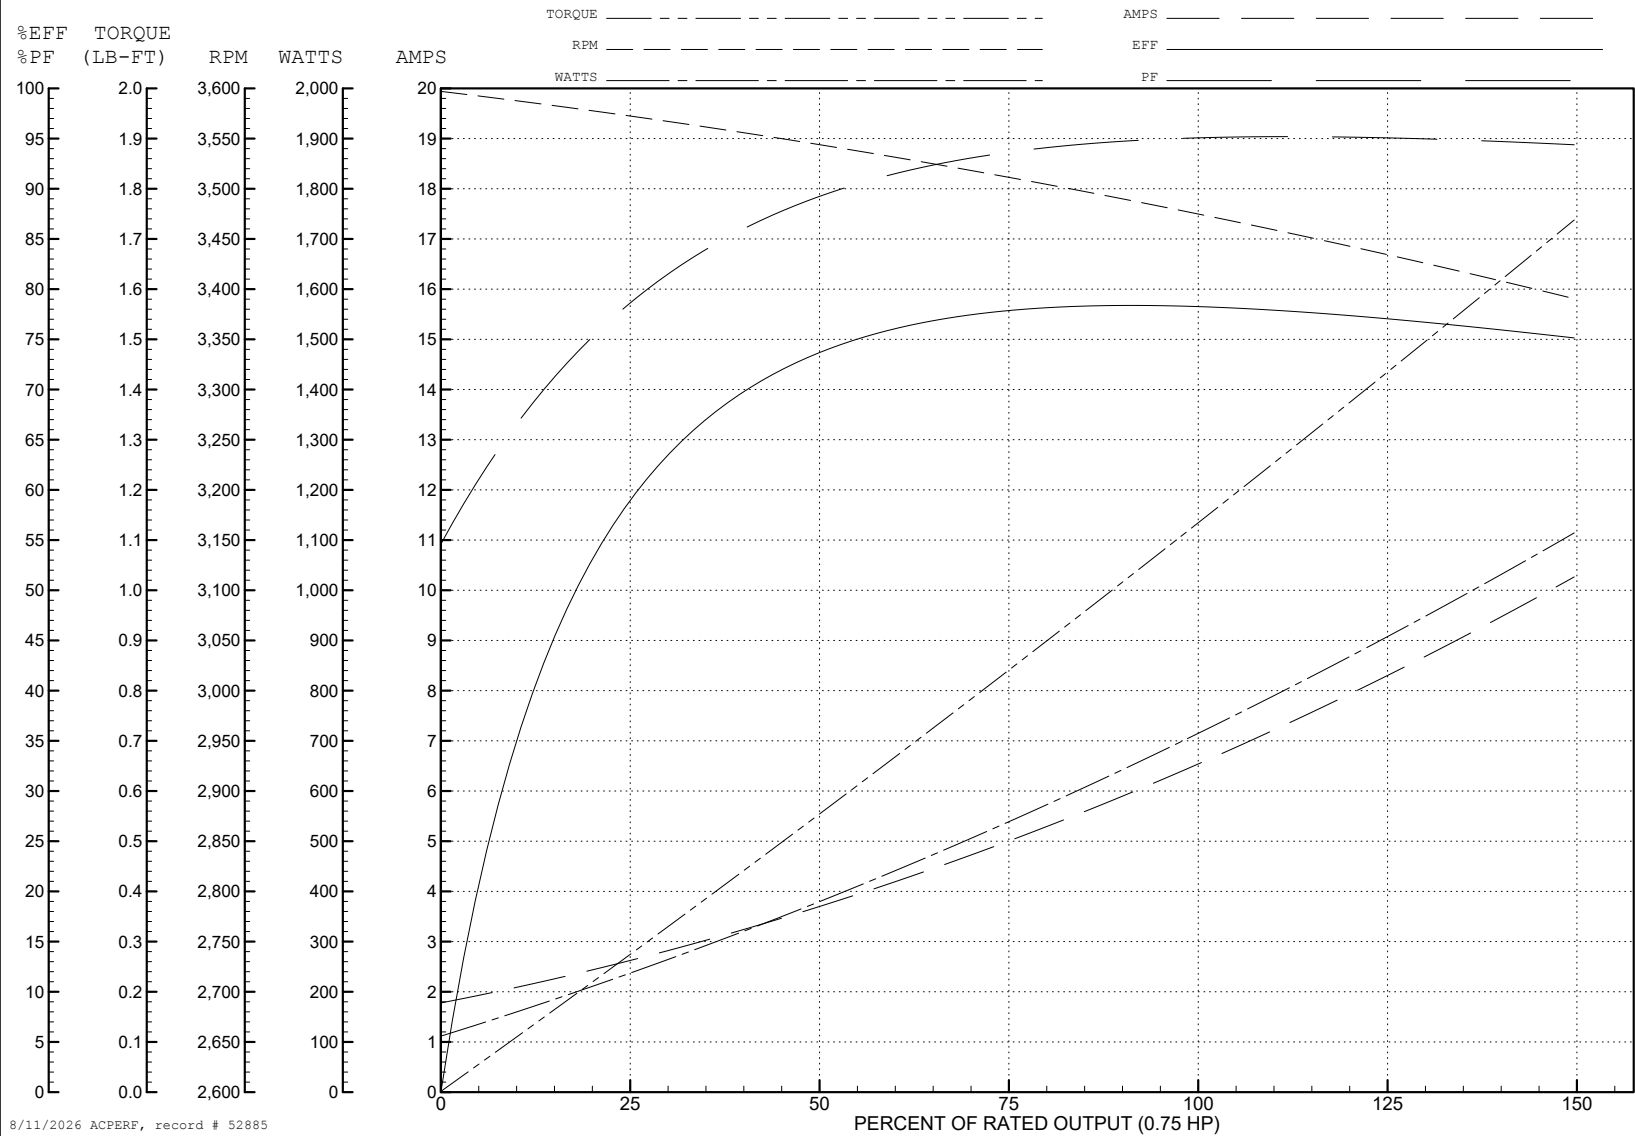

8/11/2026 ACPERF, record # 52885



CD0320

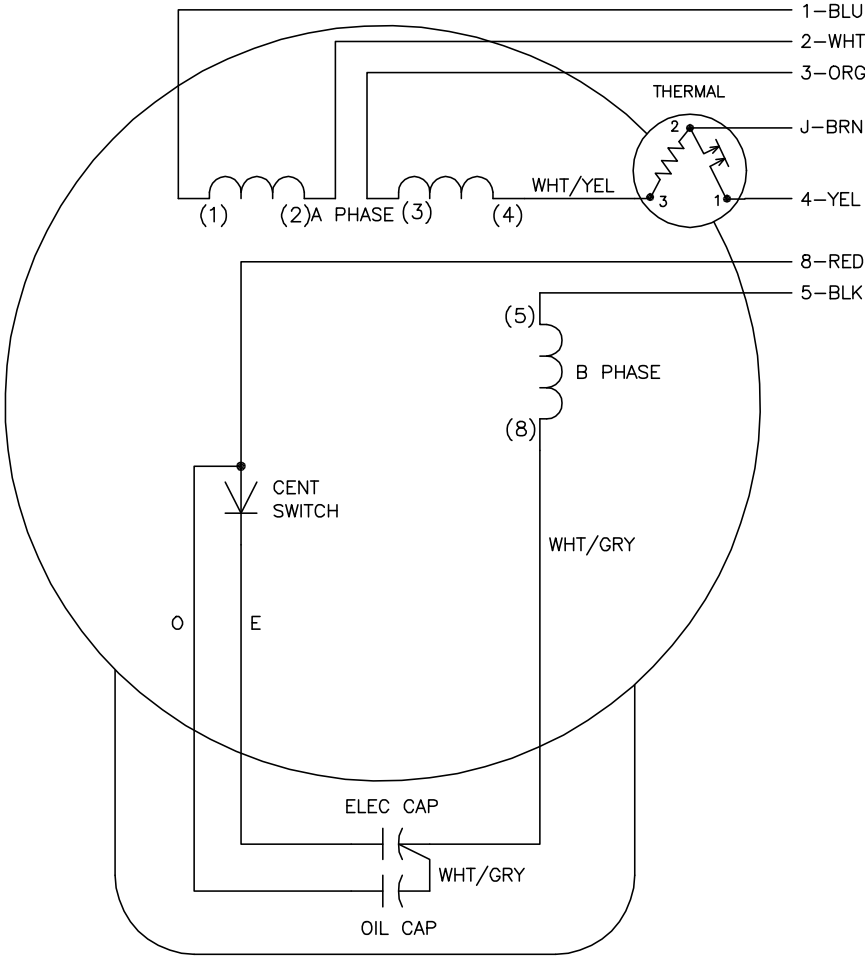

	LINE A	LINE B	JOIN	JOIN
HIGH STD	1,8	4	2,3,5	J
HIGH OPP	1,5	4	2,3,8	J
LOW STD	1,3,8	4	—	2,J,5
LOW OPP	1,3,5	4	—	2,J,8

- NOTES:
1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
 2. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
 3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0320

REV. DESC: ADD INTERNAL CONNECTION TO HELP MANUFACTURING		
REV. LTR: G	VERSION: 01	TDR: 000000941594
FILE: \AAA\00007\422	REVISED: 02: 21: 00 08/28/2015	BY: ENALEM0
MTL: —	© □	

BALDOR

TYPE LC, DV, REV, THERMAL, B PH AMPS THRU HTR HVC, 7 LEAD
SH 1 of 1