

ABB BALDOR RELIANCE III

Customer information packet

EM2514T-G

20HP, 3510RPM, 3PH, 60HZ, 254T, 3928M, OPSB, F1

Class -

Division - Not Applicable

Specifications

Enclosure	OPSB
Frame	254T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	20.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CSA EEV UR CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	23.500 A @ 460.0 V 47.000 A @ 230.0 V 51.000 A @ 208.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater

Part Detail

Revision	Z
Type	AC
Mech. spec.	39E366
Base	
Status	PRD/A
Elec. spec.	39WGX101
Layout	39LYE366
Eff. date	02-11-2026
CD Diagram	CD0180
Poles	02
Leads	9#12
Proprietary	False
Created date	11-29-2011

High Voltage Full Load Amps	23.5 a
Insulation Class	H
Inverter Code	Inverter Ready
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 12 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3928M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	21.69 IN
Power Factor	88
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3510 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3553LUA									
CAT.NO.	EM2514T-G								
SPEC.	39E366X101G1								
HP	20								
VOLTS	230/460								
AMPS	47/23.5								
RPM	3510								
FRAME	254T		HZ	60			PH	3	
SF	1.15		CODE	G	DES	A	CLASS	H	
NEMA NOM. EFF	91		PF	88					
RATING	40C AMB-CONT								
CC	010A								
ENCL	OPSB		SN						
DE	6309		ODE	6208					
VPWM INVERTER READY									
CT30-60(2:1) VT3-60(20:1)									
USABLE AT	50HZ 20HP 190/380V 56/28A							SF1.0	

Parts List

Part number	Description	Quantity
SA235026	SA 39E366X101G1	1.000 ea
RA221990	RA 39E366X101G1	1.000 ea
HA6361A01	LIFTING LUG FOR 37, 39 & 40 FRAME ZINC	2.000 ea
HA6016	ADAPTER, CAST CONDUIT BOX	1.000 ea
09CB3003	CB W/1.75" DIA LD HL - 37, 39, 307 & 309	1.000 ea
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	2.000 ea
WD1000B16	T&B CX70TN OR L70P TERMINAL LUG	1.000 ea
59XW2520G07	.25-20X.44,HEX SER WSHR,TAPTITE 2,GREEN	1.000 ea
39EP3200A01SP	FR/PU ENDPLATE, MACH	1.000 ea
HW5100A08	W3118-035 WVY WSHR (WB)	1.000 ea
39EP3201A22	PU ENDPLATE, MACH	1.000 ea
XY3816A12	3/8-16 FINISHED NUT W/SERRATIONS	8.000 ea
BP5303A01	AEGIS SH GRD W/RETAINER RING RB3001A30	1.000 ea
10XN2520K28	1/4-20 X 1.75" HX HD SCRWGRADE 5, ZINC P	4.000 ea
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	4.000 ea
09CB3501SP	CONDUIT BOX LID FOR 09CB3001 & 09CB3002	1.000 ea
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	2.000 ea
HW2501G25	KEY, 3/8 SQ X 2.875	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
LB1350	BAR CODE LABEL FOR YORK	1.000 ea
LD7020D09	LEAD SET, 12AWG, 9 LEAD, 20" LONG LEADS	1.000 ea
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 ea
HW4500A03	GREASE FITTING, .125 NPT 1610(ALEMITE) 8	1.000 ea
HW4500A20	1/8NPT SL PIPE PLUG	1.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.030 lb
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 ea
HW4500A03	GREASE FITTING, .125 NPT 1610(ALEMITE) 8	1.000 ea
HW4500A20	1/8NPT SL PIPE PLUG	1.000 ea
MG1050Y01	CELEROL BALDOR GOLD *5 GALLON BUCKET*	0.050 ga
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
39AD2002C01	BAFFLE PLATE,"X" DIM=2.12 OPEN SLOT BAND	1.000 ea

39AD2002C01	BAFFLE PLATE,"X" DIM=2.12 OPEN SLOT BAND	1.000 ea
HA3154A09	TB STUD 3/8-16 X 16.25	4.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
LC0181	CONNECTION LABEL	1.000 ea
NP3553LUA	ALUM SUPER-E VPWM INV READY UL CC NEMA P	1.000 ea
39PA1000	PACKAGING GROUP 39 PRINT	1.000 ea

AC Induction Motor Performance Data

Record # 36295

Typical performance - not guaranteed values

Winding: 39WGX101-R010			Type: 3928M		Enclosure: OPSB			
Nameplate Data			460 V, 60 Hz: High Voltage Connection					
Rated Output (HP)		20	Full Load Torque		29.6 LB-FT			
Volts		230/460	Start Configuration		direct on line			
Full Load Amps		47/23.5	Breakdown Torque		111 LB-FT			
R.P.M.		3510	Pull-up Torque		36.1 LB-FT			
Hz	60	Phase	3	Locked-rotor Torque		50.6 LB-FT		
NEMA Design Code		B	KVA Code	G	Starting Current		153 A	
Service Factor (S.F.)		1.15	No-load Current		8.61 A			
NEMA Nom. Eff.		91	Power Factor		88	Line-line Res. @ 25°C		0.512 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		44°C	
S.F. Amps					Temp. Rise @ S.F. Load		54°C	
					Locked-rotor Power Factor		30	
					Rotor inertia		0.715 LB-FT2	

Load Characteristics 460 V, 60 Hz, 20 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	52	74	83	87	89	89	88
Efficiency	84.7	90.1	91.2	91	90.1	89.1	90.5
Speed	3581	3563	3544	3522	3496	3472	3506
Line amperes	10.2	13.9	18.1	23.3	29.1	35	26.78


ABB Motors and Mechanical Inc.

WINDING # 39WGX101

Typical performance - not guaranteed values.

20 HP 3 PH 60 HZ 3510 RPM 460 V 3928M

TORQUES (LB-FT): PO=111 PU=36.1 LR=50.6 LRA=153

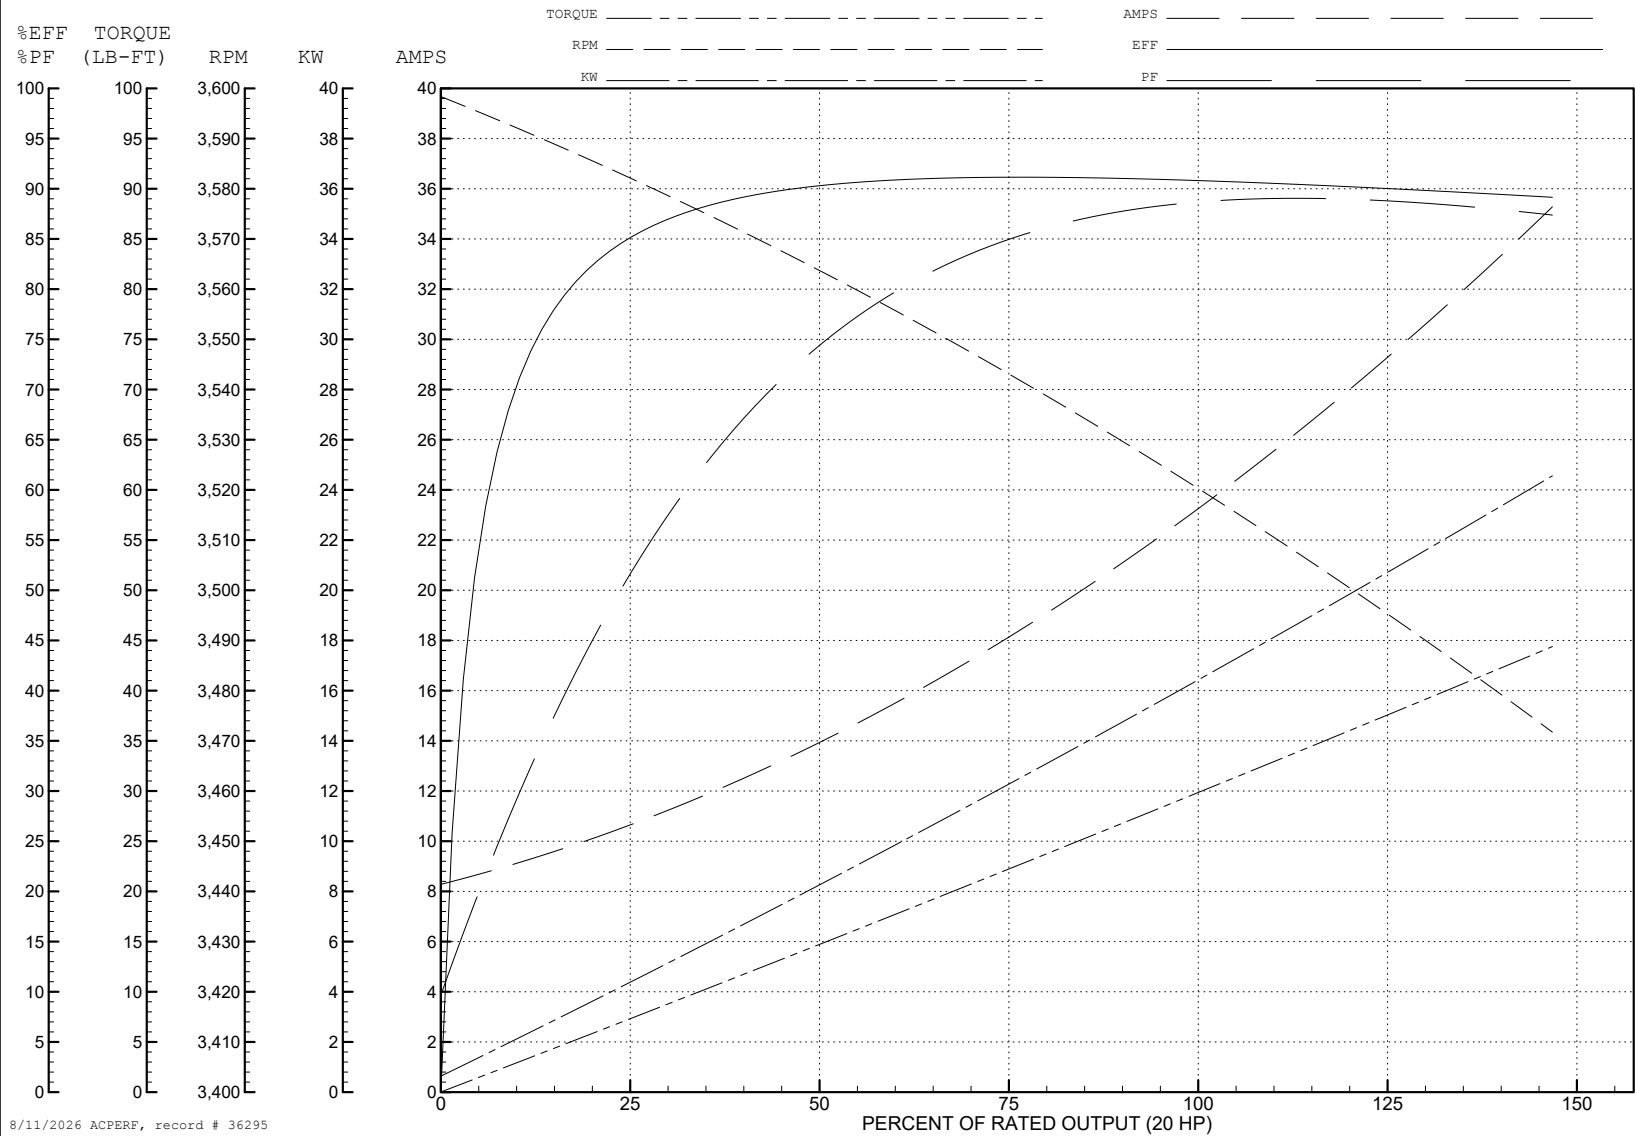





CD0180



LOW VOLTAGE
(2D)



HIGH VOLTAGE
(1D)



NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007

REV. LTR: D

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\148

REVISED: 10: 25: 29 02/19/2019

BY: ENBRIRO

MTL: -



BALDOR - RELIANCE®

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1