

ABB BALDOR RELIANCE III

Customer information packet

EM2535T-12

30HP, 1775RPM, 3PH, 60HZ, 286T, 4060M, OPSB, F1

Specifications

Enclosure	OPSB
Frame	286T
Frame Material	Steel
Frequency	60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	30.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CURUSEEV NEMA PREMIUM NEMA PREMIUM (OLD LOGO)
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	72.000 A @ 230.0 V 76.000 A @ 208.0 V 36.000 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	94.1 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	36.0 a

Part Detail

Revision	L
Type	AC
Mech. spec.	40D101
Base	
Status	PRD/A
Elec. spec.	40WGX349
Layout	40LYD101
Eff. date	06-27-2024
CD Diagram	CD0104
Poles	04
Leads	12#10
Proprietary	False
Created date	05-26-2016

Insulation Class	F
Inverter Code	Inverter Ready
IP Rating	NONE
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	12 @ 10 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	4060M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	26.06 IN
Power Factor	82
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.875 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1775 rpm
Speed Code	Single Speed
Starting Method	Wye Start - Delta Run
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3554LUA											
CAT.NO.	EM2535T-12			P/N						ENCL	OPSB
SPEC.	40D101X349G1	CC	010A	FRAME		286T	SER.NO.				
HP	30		CLASS		F	HZ	60				
RPM	1775		PH	3	DES		A				
VOLTS	230/460			CODE		H	ODE BRG	6309	DE BRG	6311	
AMPS	72/36										
RATING	40C AMB-CONT		NEMA-NOM-EFF			94.1	GREASE	POLYREX EM			
PF	82	SER.F.	1.15		CT30-60(2:1) VT3-60(20:1)						
USABLE AT	50HZ 30HP 190/380V 86/43A				SF 1.0						
HTR-VOLTS	HTR-AMPS	MAX. SPACE HEATER TEMP.									

Parts List

Part number	Description	Quantity
SA321221	SA 40D101X349G1	1.000 ea
RA308973	RA 40D101X349G1	1.000 ea
HA6361A01	LIFTING LUG FOR 37, 39 & 40 FRAME ZINC	2.000 ea
HA6017	CAST ADAPTER, 40,42 KOBX	1.000 ea
19XW3118A12	.31-18 X .75 HEX WASHER HEAD TAPTITE II	2.000 ea
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	2.000 ea
WD1000B25	GND LUG, BURNDY L125HP OR T&B L125HP-BB	1.000 ea
19XW3118G08	.31-18X.50,HEX WSHR HD,TAPTITE 2,GREEN	1.000 ea
10CB3000SP	KOBX, CAST W/2.00 LEAD HOLE	1.000 ea
19XW3118A12	.31-18 X .75 HEX WASHER HEAD TAPTITE II	4.000 ea
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	4.000 ea
40EP3200A02	STD FREP OPEN 309 BRG	1.000 ea
HW5100A11	W3917-042 WVY WSHR (WB)	1.000 ea
40EP3200B05	STD PUEP OPEN 311 BRG	1.000 ea
XY3816A12	3/8-16 FINISHED NUT W/SERRATIONS	8.000 ea
10CB3500SP	CONDUIT BOX LID, CAST	1.000 ea
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	4.000 ea
HW2501H28	KEY, 1/2 SQ X 3.250	1.000 ea
HW4500A03	GREASE FITTING, .125 NPT 1610(ALEMITE) 8	1.000 ea
HW4500A20	1/8NPT SL PIPE PLUG	1.000 ea
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 ea
MG1050Y01	CELEROL BALDOR GOLD *5 GALLON BUCKET*	0.070 ga
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
HW4500A03	GREASE FITTING, .125 NPT 1610(ALEMITE) 8	1.000 ea
HW4500A20	1/8NPT SL PIPE PLUG	1.000 ea
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	4.000 ea
40AD2002A01	LEXAN BAFFLE 40 FR OPEN	1.000 ea
HA3159A08	THRUBOLT- .38-16 X 20.00 LONG STUD	4.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
40AD2002A01	LEXAN BAFFLE 40 FR OPEN	1.000 ea

LC0104A01	CONNECTION DIAGRAM	1.000 ea
NP3554LUA	SS SUPER-E VPWM INV READY,CURUS-EEV,PREM	1.000 ea
40PA1000	PACKAGING GROUP	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea

AC Induction Motor Performance Data

Record # 57331

Typical performance - not guaranteed values

Winding: 40WGX349-R001				Type: 4060M		Enclosure: OPSB	
Nameplate Data				460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		30		Full Load Torque		88.8 LB-FT	
Volts		230/460		Start Configuration		direct on line	
Full Load Amps		72/36		Breakdown Torque		278 LB-FT	
R.P.M.		1775		Pull-up Torque		130 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		160 LB-FT	
NEMA Design Code		A	KVA Code	Starting Current		250 A	
Service Factor (S.F.)		1.15		No-load Current		15.1 A	
NEMA Nom. Eff.		94.1	Power Factor	Line-line Res. @ 25°C		0.204 Ω	
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		29°C	
S.F. Amps				Temp. Rise @ S.F. Load		35°C	
				Locked-rotor Power Factor		31.3	
				Rotor inertia		4.77 LB-FT2	

Load Characteristics 460 V, 60 Hz, 30 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	45	67	78	83	85	86	84
Efficiency	90.4	93.9	94.4	94.4	93.5	93.1	93.9
Speed	1794	1788	1782	1777	1770	1763	1773
Line amperes	17.4	22.3	28.8	36.1	44.2	52.9	41


ABB Motors and Mechanical Inc.


WINDING # 40WGX349

Typical performance - not guaranteed values.

30 HP 3 PH 60 HZ 1775 RPM 460 V 4060M

TORQUES (LB-FT): PO=278 PU=130 LR=160 LRA=250

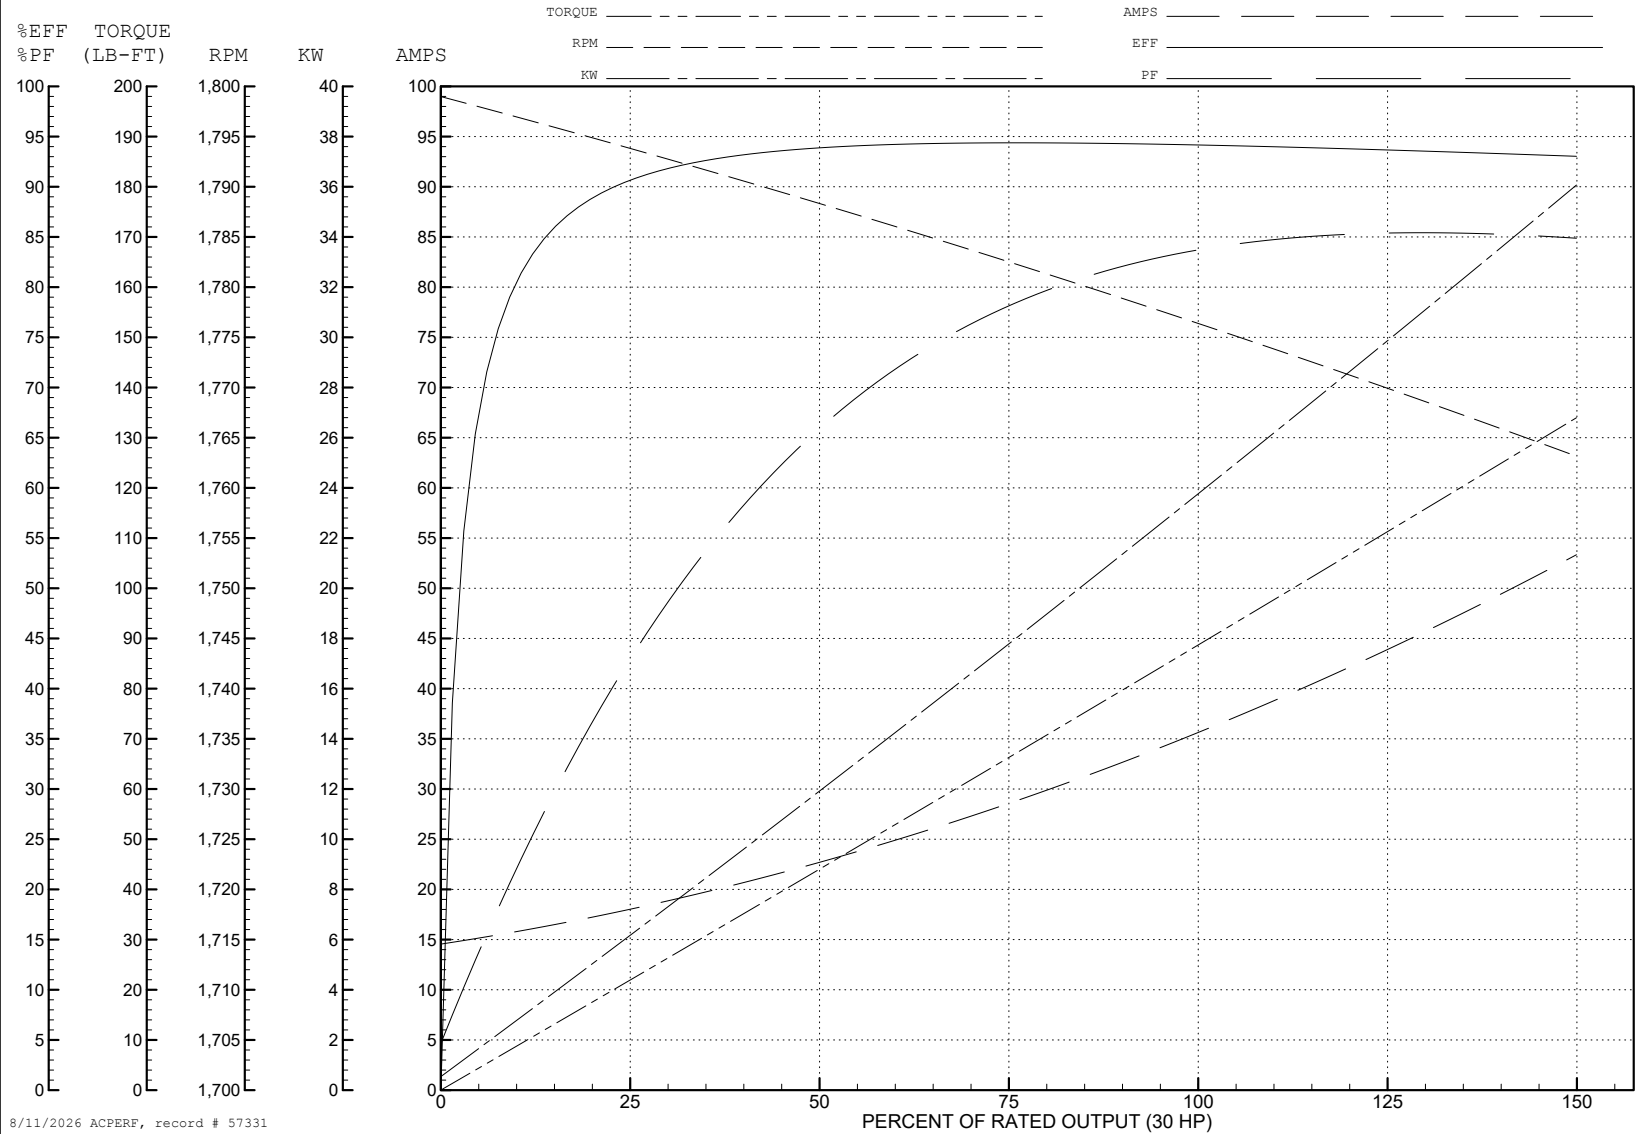

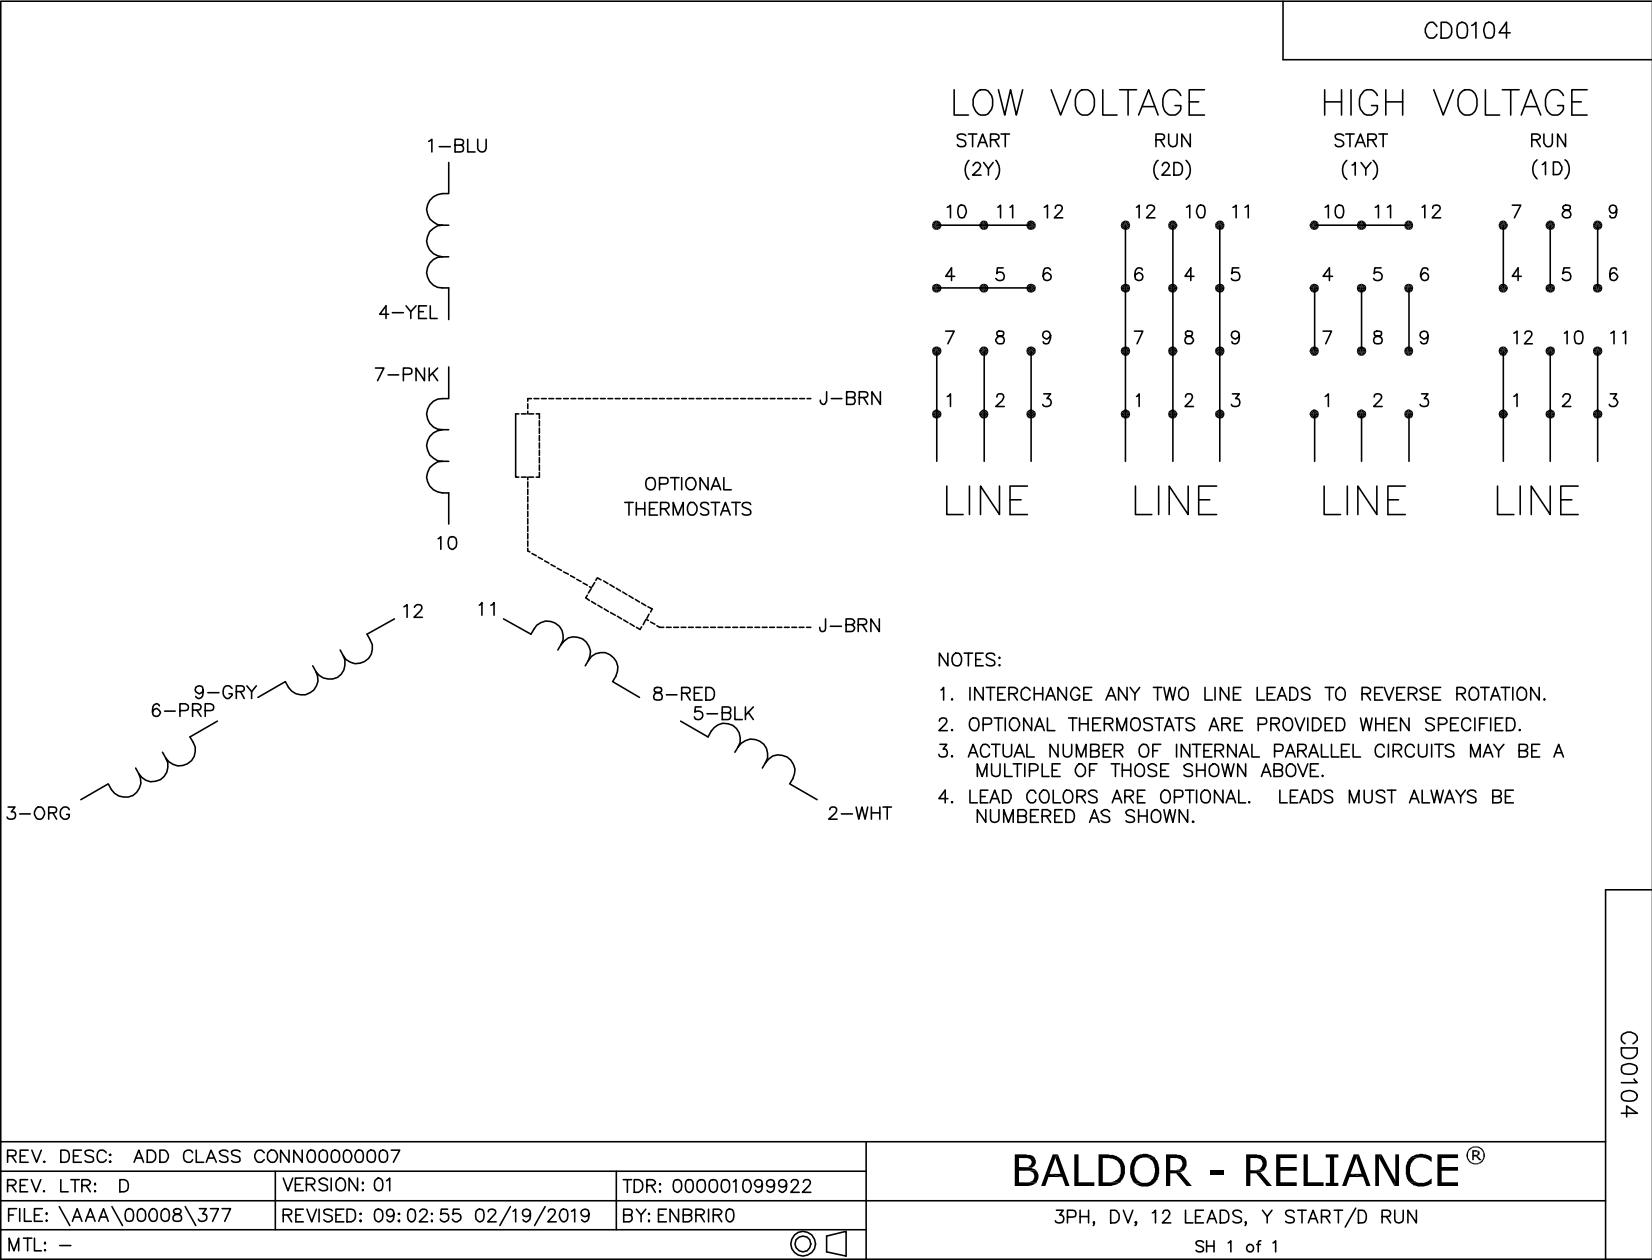

REV. DESC: ADD CLASS CONN00000007

REV. LTR: D

VERSION: 01

TDR: 000001099922

FILE: \AAA\00008\377

REVISED: 09:02:55 02/19/2019

BY: ENBRIR0

MTL: —

BALDOR - RELIANCE®

3PH, DV, 12 LEADS, Y START/D RUN

SH 1 of 1

CD0104