

ABB BALDOR RELIANCE III

Customer information packet

EM3663T-8

28M 2P TEFC HOR 184T SUPER E

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	184T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	200.0 V @ 60 HZ
Agency Approvals	NEMA PREMIUM CURUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	13.300 A @ 200.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	88.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	13.3 a
Insulation Class	F
Inverter Code	Not Inverter
IP Rating	NONE

Part Detail

Revision	E
Type	AC
Mech. spec.	06C101
Base	
Status	PRD/A
Elec. spec.	06WGX788
Layout	06LYC101
Eff. date	08-05-2024
CD Diagram	CD00006
Poles	02
Leads	3#14
Proprietary	False
Created date	12-14-2018

KVA Code	L
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	3 @ 14 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0628M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	15.24 IN
Power Factor	90
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3480 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3441L											
CAT.NO.	EM3663T-8										
SPEC.	06C101X788G1										
HP	5										
VOLTS	200										
AMP	13.3										
RPM	3480										
FRAME	184T		HZ	60				PH	3		
SER.F.	1.15	CODE	L	DES	A	CL	F				
NEMA-NOM-EFF	88.5	PF	90								
RATING	40C AMB-CONT										
CC	010A										
DE	6206		ODE	6205							
ENCL	TEFC	SN									
VPWM INVERTER READY											
CT6-60H(10:1)VT3-60H(20:1											

Parts List

Part number	Description	Quantity
SA364079	SA 06C101X788G1	1.000 ea
RA353389	RA 06C101X788G1	1.000 ea
34FN3002B02	EXTERNAL FAN, PLASTIC, .905/.907 HUB W/	1.000 ea
HW3201A05	3/8-16 EYEBOLT	1.000 ea
06CB3000	BALDOR CONDUIT BOX CAST	1.000 ea
06GS1000	GASKET, CONDUIT BOX	1.000 ea
51XW2520A12	SCREW, HEX SER SLT HD, ZN, 1/4-20 X .75	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
HW3001B02	BRASS CUP WASHER W/GROUND SYMBOL TAB,	1.000 ea
36FE1101B47	FREP ASSEMBLY FOR ROUTING PURPOSES	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
HW5100A05	WVY WSHR F/205 & 304 BRGS	1.000 ea
36PE1100A01	PUEP ASSEMBLY FOR ROUTING PURPOSES	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
HA3101A34	THRUBOLT- 1/4-20 X 10.375	4.000 ea
XY2520A12	1/4-20 HEX NUT, DIRECTIONAL SERRATIONS	4.000 ea
51XB1214A16	12-14X1.00 HXWSSLD SERTYB	1.000 ea
36FH4009A03SP	IEC FH , W/ PRIMER	1.000 ea
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 ea
06CB3500	BALDOR CONDUIT BOX LID	1.000 ea
06GS1001	BALDOR CONDUIT BOX GASKET	1.000 ea
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	2.000 ea
HW2501E16	KEY, 1/4 SQ X 1.750	1.000 ea
MG1050Y01	CELEROL BALDOR GOLD *5 GALLON BUCKET*	0.026 ga
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
LC0006	CONNECTION LABEL	1.000 ea
NP3441L	ALUM SUPER-E VPWM INVERTER READY UL EEV	1.000 ea
36PA1001	PKG GRP, PRINT PK1017A07	1.000 ea

MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
----------	---	----------

Accessories

Part number	Description	Multiplier
36-1749	C FACE KIT	A8

AC Induction Motor Performance Data

Record # 50654

Typical performance - not guaranteed values

Winding: 06WGX788-R001			Type: 0628M		Enclosure: TEFC	
Nameplate Data			200 V, 60 Hz: Single Voltage Motor			
Rated Output (HP)		5	Full Load Torque		7.55 LB-FT	
Volts		200	Start Configuration		direct on line	
Full Load Amps		13.3	Breakdown Torque		34.7 LB-FT	
R.P.M.		3480	Pull-up Torque		22.3 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque	26.8 LB-FT	
NEMA Design Code	A	KVA Code	L	Starting Current	134 A	
Service Factor (S.F.)		1.15	No-load Current		4.46 A	
NEMA Nom. Eff.	88.5	Power Factor	90	Line-line Res. @ 25°C	0.544 Ω	
Rating - Duty		40C AMB-CONT	Temp. Rise @ Rated Load		57°C	
S.F. Amps			Temp. Rise @ S.F. Load		70°C	
			Locked-rotor Power Factor		50.8	
			Rotor inertia		0.125 LB-FT2	

Load Characteristics 200 V, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	58	79	87	92	93	94	93
Efficiency	85.9	90	90.1	89.2	87.8	85.8	88.4
Speed	3573	3546	3515	3483	3448	3409	3462
Line amperes	5.42	7.53	10.3	13.2	16.4	20	15.1


ABB Motors and Mechanical Inc.


WINDING # 06WGX788

Typical performance - not guaranteed values.




5 HP 3 PH 60 HZ 3480 RPM 200 V 0628M

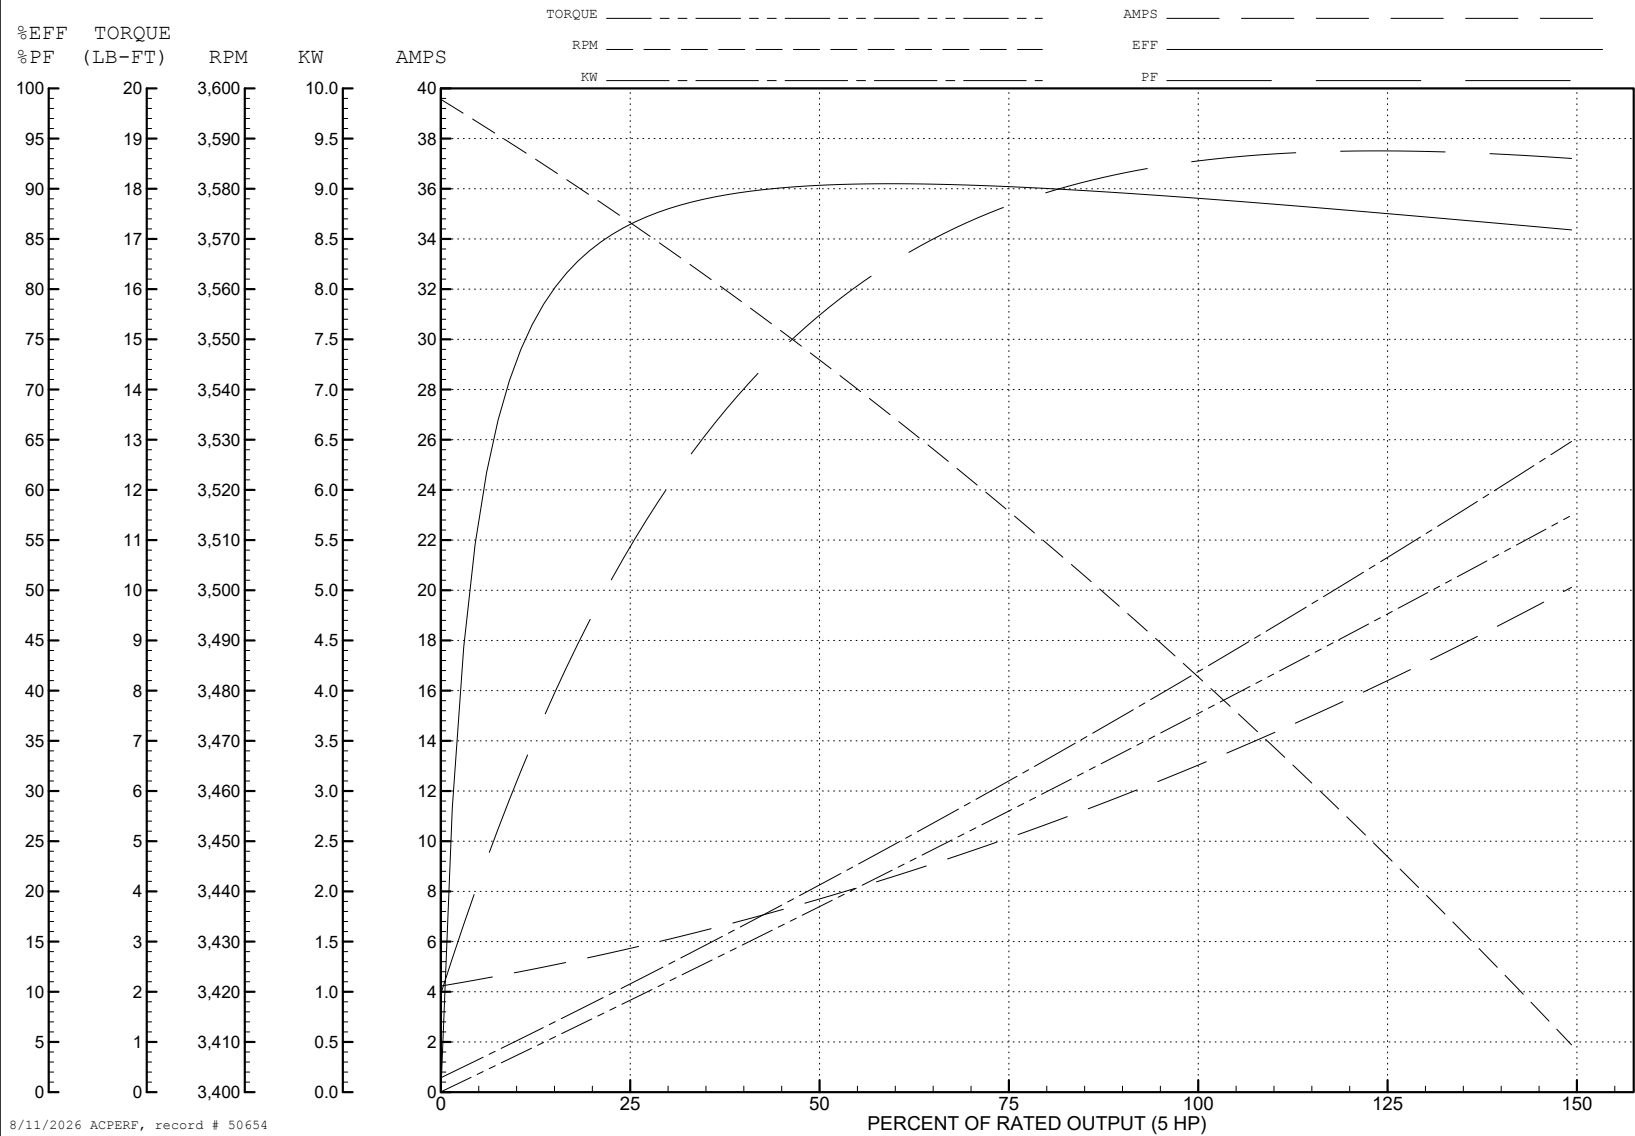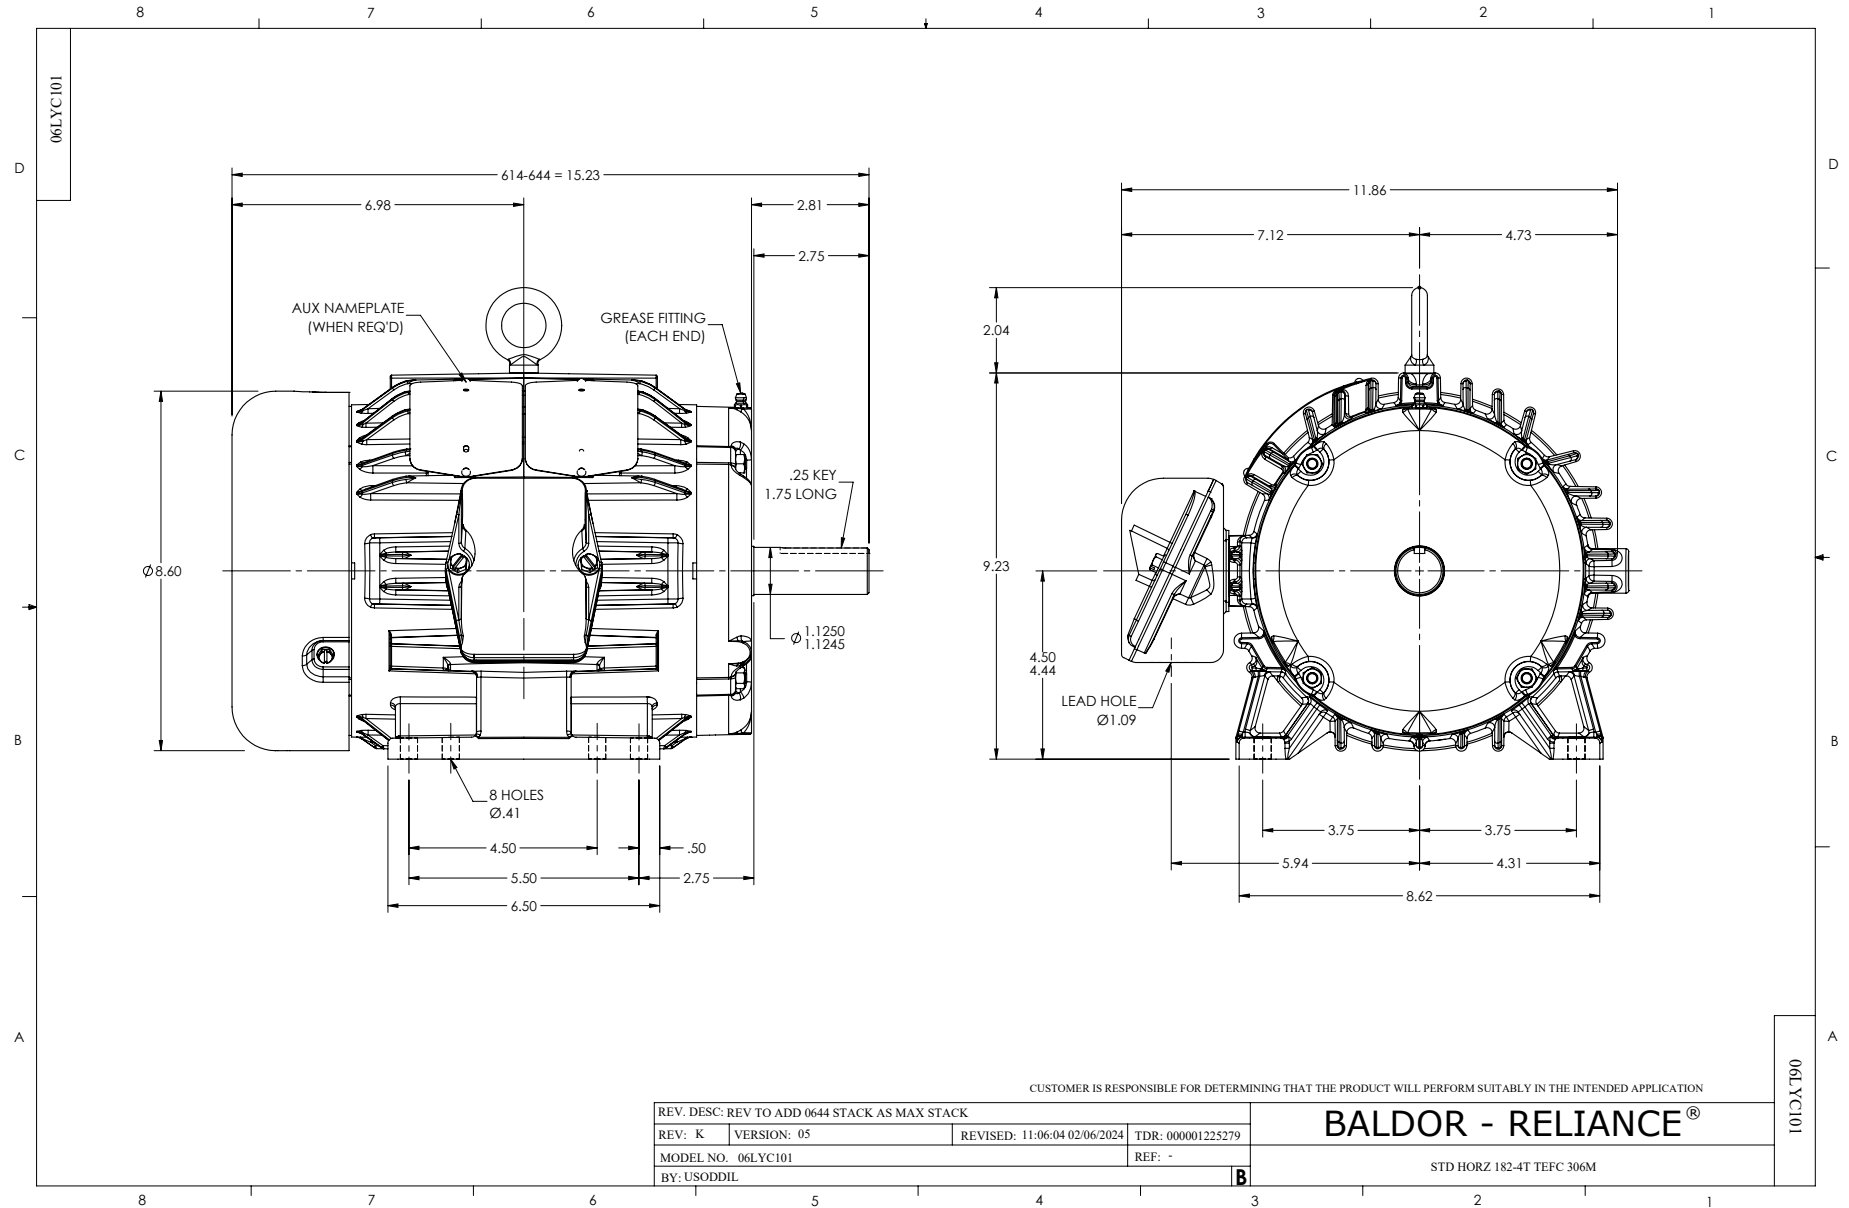TORQUES (LB-FT): PO=34.7 PU=22.3 LR=26.8 LRA=134





CD0006

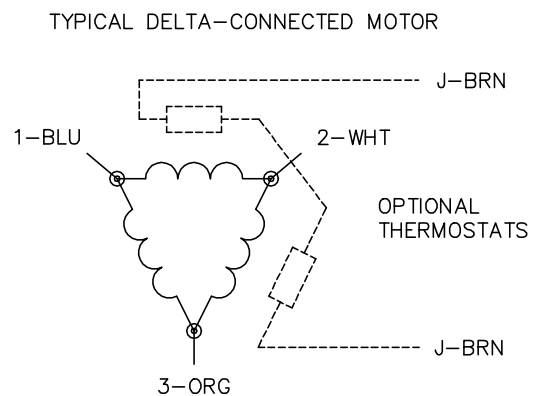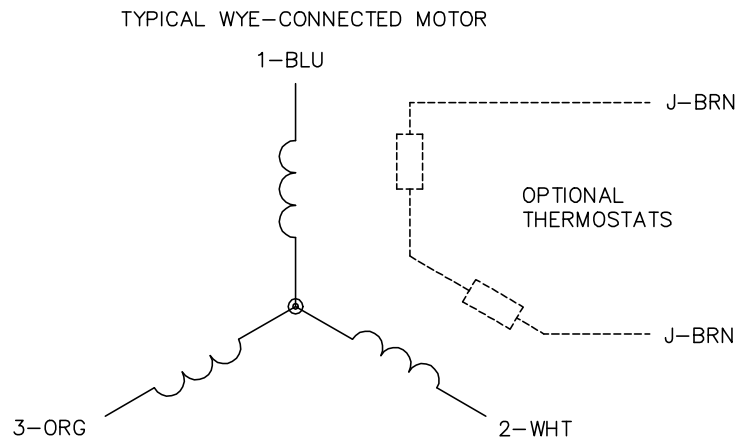
NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007

REV. LTR: E

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\141

REVISED: 10:24:49 02/19/2019

BY: ENBRIRO

MTL: -


BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1