ABB BALDOR RELIANCE

Customer information packet

EM3714T

10HP, 1768RPM, 3PH, 60HZ, 215T, 3750M, TEFC, F1
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/1/2026 10:45:24 PM

Specifications

Enclosure	TEFC
Frame	215T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	10.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
	460.0 V @ 60 HZ
Agency Approvals	CURUSEEV
	NEMA PREMIUM
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	12.400 A @ 460.0 V
	24.800 A @ 230.0 V
	27.000 A @ 208.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.7 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	12.4 a

Part Detail

Revision	-
Type	AC
Mech. spec.	37H244
Base	
Status	PRD/A
Elec. spec.	37WGZ711
Layout	37LYH244
Eff. date	11-24-2025
CD Diagram	CD0005
Poles	04
Leads	9#14
Proprietary	False
Created date	11-05-2025

Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	K
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 14 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3750M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	19.77 IN
Power Factor	85
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	1.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1768 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3441LUA											
CAT.NO.	EM3714T										
SPEC	37H244Z711										
HP	10										
VOLTS	230/460										
AMPS	24.8/12.4										
RPM	1768										
FRAME	215T	**HZ**	60	**PH**	3						
SF	1.15	**CODE**	K	**DES**	A	**CLASS**	F				
NEMA NOM. EFF	91.7	**PF**	85								
RATING	40C AMB-CONT										
CC	010A										
ENCL	TEFC	**SER**									
DE	6307	**ODE**	6206								
VPWM INVERTER READY		SFA 28.2/14.1									
CT6-60H(10:1)VT3-60H(20:1											
	50HZ 10HP 190/380V 29.8/14.9A										SF1.0

Parts List

Part number	Description	Quantity
SA443063	SA 37H244Z711	1.000 ea
RA435559	RA 37H244Z711	1.000 ea
HW3200A01	3/8-16X3/4 EYEBOLT WELDED F/S	1.000 ea
37CB3006	37 CB CASTING W/1.38 LEAD HOLE @ 6:00	1.000 ea
37GS1000SP	GASKET, CONDUIT BOX STD., .06 THICK LEXI	1.000 ea
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
37EP3101A01	FR ENDPLATE, FOR ROUTING PURPOSES	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
HW5100A06	W2420-025 WVY WSHR (WB)	1.000 ea
37EP3100A01	PUEP ASSEMBLY - ROUTING PUPROSES	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
XY3118A12	5/16-18 HEX NUT DIRECTIONAL SERRATION	4.000 ea
07FH4007SP	PRIMED	1.000 ea
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 ea
37CB4516	LIPPED LID FOR 37 FRAME NEC KOBX	1.000 ea
37GS1008	37 GS FOR CB LID - LEXIDE	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 ea
HW2501F21	KEY, 5/16 SQ X 2.375	1.000 ea
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
51XB1214A20	12-14X1.25 HXWSSLD SERTYB	1.000 ea
HA3104A18	THRUBOLT- 5/16-18 X14.000	4.000 ea
MG1050Y01	CELEROL BALDOR GOLD *5 GALLON BUCKET*	0.028 ga
LC0005	CONN.DIA.,TY M,9-LD,DUAL VOLT,REVERSING	1.000 ea
NP3441LUA	AL SUPER-E VPWM INV RDY,UL EEV,NEMA PREM	1.000 ea
37PA1074	PALLET PACK GRP, PRINT BOX PK1026A06	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
37FN3002C01	EXFN, PLASTIC, 6.00 OD, 1.155 ID	1.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea

Accessories

Part number	Description	Multiplier
37-3301	C FACE KIT	P1


AC Induction Motor Performance Data
Record # 115760
Typical performance - not guaranteed values


Winding: 37WGZ711-R001	**Type:** 3750M	**Enclosure:** TEFC

Nameplate Data			**460 V, 60 Hz: High Voltage Connection**	
Rated Output (HP)		10	**Full Load Torque**	29.79 LB-FT
Volts		230/460	**Start Configuration**	direct on line
Full Load Amps		24.8/12.4	**Breakdown Torque**	93.4 LB-FT
R.P.M.		1768	**Pull-up Torque**	44.7 LB-FT
Hz	60 **Phase**	3	**Locked-rotor Torque**	55.5 LB-FT
NEMA Design Code	A **KVA Code**	K	**Starting Current**	90.5 A
Service Factor (S.F.)		1.15	**No-load Current**	5.11 A
NEMA Nom. Eff.	91.7 **Power Factor**	85	**Line-line Res. @ 25ºC**	1.1801 Ω
Rating - Duty		40C AMB-CONT	**Temp. Rise @ Rated Load**	77°C
S.F. Amps		28.2/14.1	**Temp. Rise @ S.F. Load**	108°C
			Locked-rotor Power Factor	37.2


Load Characteristics 460 V, 60 Hz, 10 HP


% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	45	68	78	82	85	85	84
Efficiency	89.9	92.6	92.6	91.8	90.5	88.9	91
Speed	1792.4	1785	1776.3	1767.2	1756.7	1745.2	1756
Line amperes	5.83	7.54	9.79	12.4	15.3	18.6	14.2

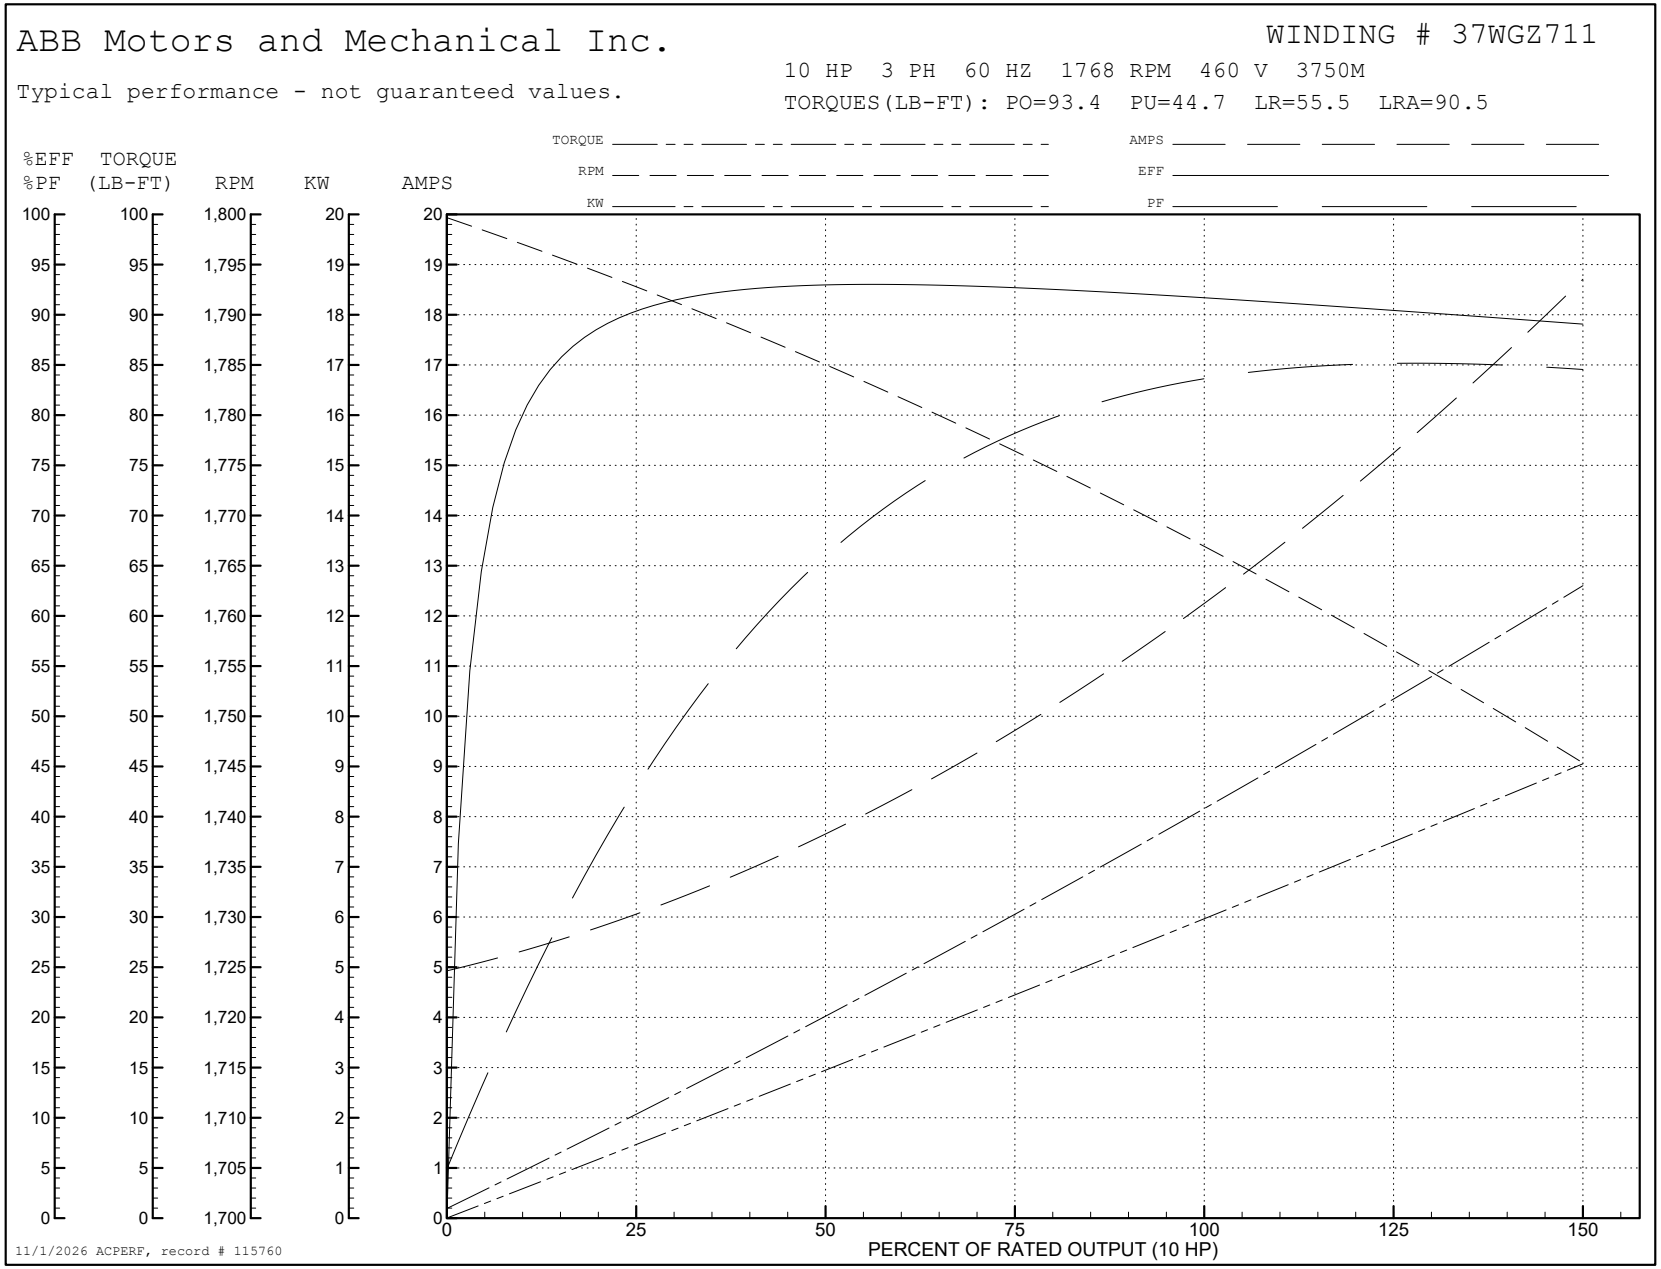
ABB Motors and Mechanical Inc.
WINDING # 37WGZ711
10 HP 3 PH 60 HZ 1768 RPM 460 V 3750M
Typical performance - not guaranteed values.
TORQUES(LB-FT): PO=93.4 PU=44.7 LR=55.5 LRA=90.5
TORQUE
RPM
KW
AMPS
EFF
PF
%EFF %PF
TORQUE (LB-FT)
RPM
KW
AMPS
PERCENT OF RATED OUTPUT (10 HP)
11/1/2026 ACPERF, record # 115760

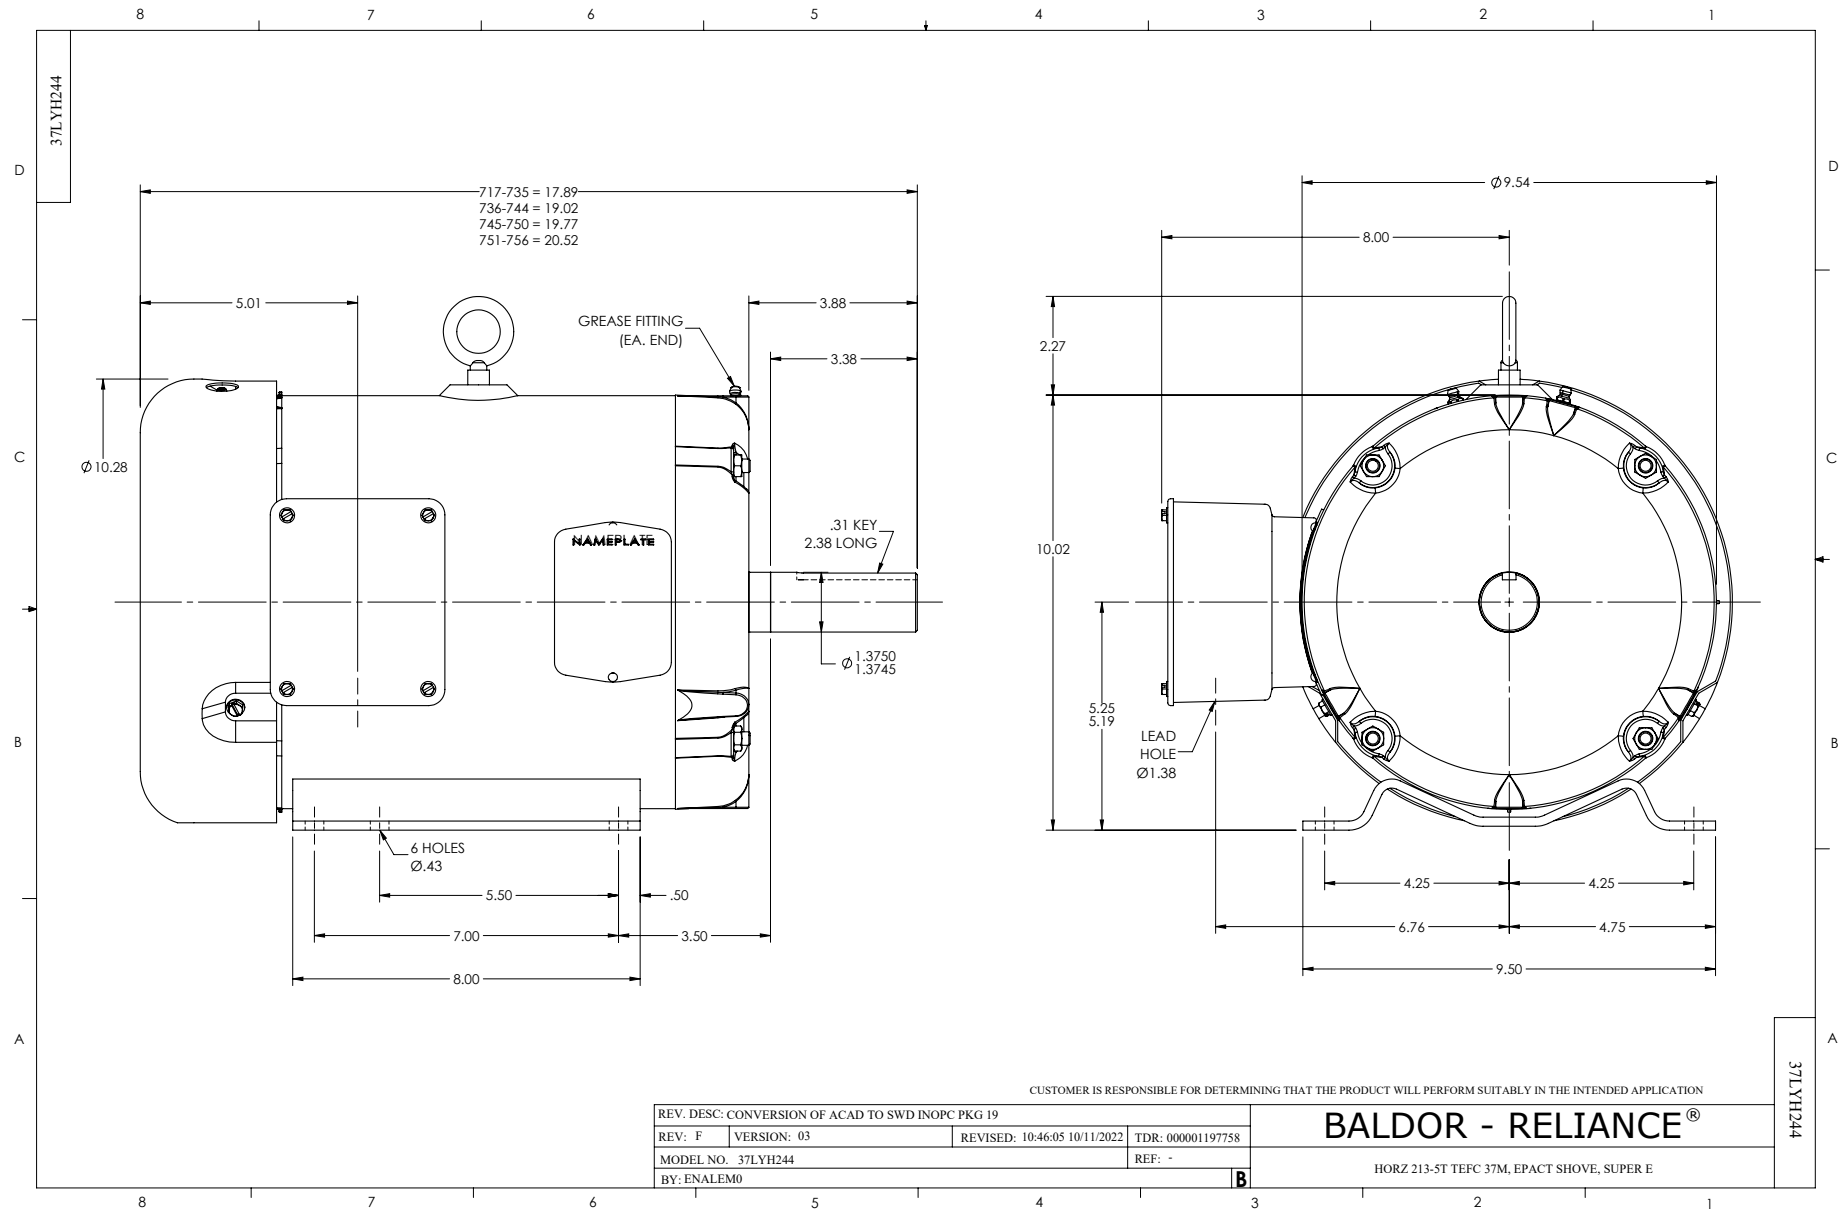
37LYH244
717-735 = 17.89
736-744 = 19.02
745-750 = 19.77
751-756 = 20.52
5.01
3.88
3.38
GREASE FITTING
(EA. END)
Ø 10.28
NAMEPLATE
.31 KEY
2.38 LONG
Ø 1.3750
1.3745
6 HOLES
Ø.43
5.50
.50
7.00
3.50
8.00
Ø 9.54
8.00
2.27
10.02
5.25
5.19
LEAD
HOLE
Ø1.38
4.25
4.25
6.76
4.75
9.50
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: CONVERSION OF ACAD TO SWD INOPC PKG 19
REV: F
VERSION: 03
REVISED: 10:46:05 10/11/2022
TDR: 000001197758
MODEL NO. 37LYH244
REF: -
BY: ENALEM0
B
BALDOR - RELIANCE®
HORZ 213-5T TEFC 37M, EPACT SHOVE, SUPER E
37LYH244

CD0005

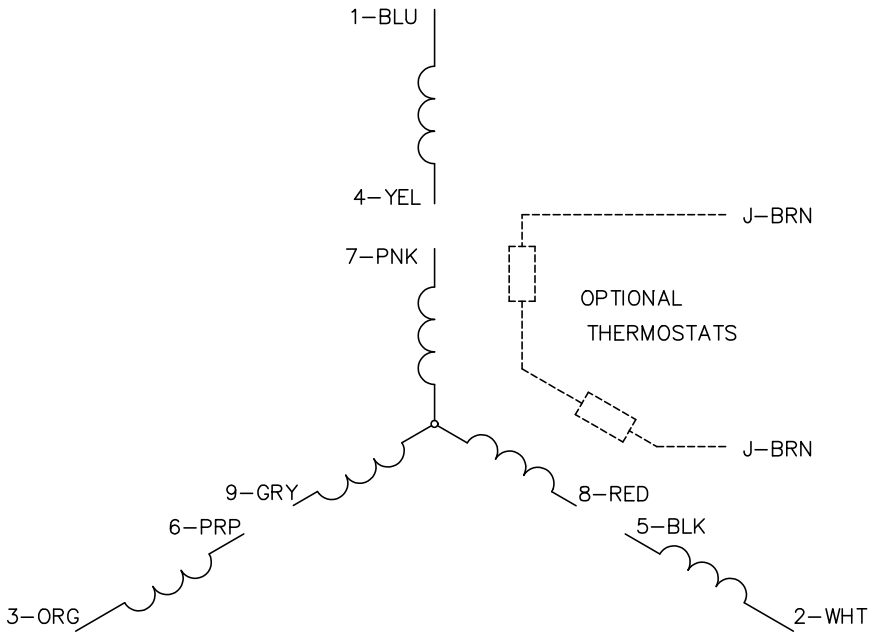

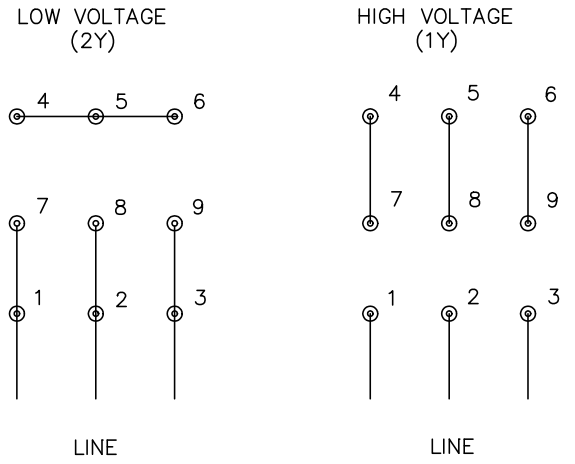

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
CD0005		FILE: AAA00005140	MDL: –
		MTL: –	3PH, DV, 9 LEADS