ABB BALDOR RELIANCE

Customer information packet

EM4106T-8

20HP, 3510RPM, 3PH, 60HZ, 256T, 0936M, TEFC, F1
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/2/2026 1:09:49 PM

Specifications

Enclosure	TEFC
Frame	256T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	20.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	200.0 V @ 60 HZ
Agency Approvals	NEMA PREMIUM NEMA PREMIUM (OLD LOGO) CURUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	51.000 A @ 208.0 V 52.000 A @ 200.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	52.0 a
Insulation Class	F

Part Detail

Revision	G
Type	AC
Mech. spec.	09P11
Base	
Status	PRD/A
Elec. spec.	09WGT605
Layout	09LYP011
Eff. date	04-16-2024
CD Diagram	CD0695
Poles	02
Leads	6#8
Proprietary	False
Created date	07-07-2021

Inverter Code	Inverter Ready
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	6 @ 8 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0936M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	23.36 IN
Power Factor	89
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	3510 rpm
Speed Code	Single Speed
Starting Method	Part Winding
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3441L									
CAT.NO.	EM4106T-8								
SPEC.	09P011T605								
HP	20								
VOLTS	200								
AMP	52								
RPM	3510								
FRAME	256T	**HZ**	60				**PH**	3	
SER.F.	1.15	**CODE**	G	**DES**	A	**CL**	F		
NEMA-NOM-EFF	91	**PF**	89						
RATING	40C AMB-CONT								
CC	010A								
DE	6309	**ODE**	6208						
ENCL	TEFC	**SN**							
VPWM INVERTER READY									
CT6-60H(10:1)VT3-60H(20:1									

Parts List

Part number	Description	Quantity
SA395202	SA 09P011T605	1.000 ea
RA385930	RA 09P011T605	1.000 ea
37FN3002C02	EXFN, PLASTIC, 6.00 OD, 1.503 ID	1.000 ea
HW1002A63	WASHER, 5/8 HI-COLLAR SPRLCKWASHER	1.000 ea
09CB3003	CB W/1.75" DIA LD HL - 37, 39, 307 & 309	1.000 ea
09GS1000	GASKET-CONDUIT BOX, 1/16 THICK LEXIDE	1.000 ea
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	4.000 ea
WD1000B16	T&B CX70TN OR L70P TERMINAL LUG	1.000 ea
59XW2520G07	.25-20X.44,HEX SER WSHR,TAPTITE 2,GREEN	1.000 ea
HA3400A33	STUD- 3/8-16 X 4.96 HEX	4.000 ea
HW1001A38	LOCKWASHER 3/8, ZINC PLT .688 OD, .382 I	4.000 ea
HW5100A08	W3118-035 WVY WSHR (WB)	1.000 ea
09EP1101A136	PU ENDPLATE, MACH	1.000 ea
10XN3816K28	3/8-16 X 1.75 HEX HD CAP SCREW, GRADE 5	4.000 ea
HW1001A38	LOCKWASHER 3/8, ZINC PLT .688 OD, .382 I	4.000 ea
HW4600B44	V-RING SLINGER 1.500 X 1.810 X .28 VITON	1.000 ea
10XN2520K36	1/4-20 X 2.25" HX HD SCRWGRADE 5, ZINC P	4.000 ea
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	4.000 ea
09FH4000SP	309 FH - BLACK PRIMER	1.000 ea
XY3816A12	3/8-16 FINISHED NUT W/SERRATIONS	4.000 ea
HW1001A38	LOCKWASHER 3/8, ZINC PLT .688 OD, .382 I	4.000 ea
09CB3501SP	CONDUIT BOX LID FOR 09CB3001 & 09CB3002	1.000 ea
09GS1013SP	GS FOR 09CB3501, 12CB1500 & 12CB1503 LID	1.000 ea
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	2.000 ea
HW2501G25	KEY, 3/8 SQ X 2.875	1.000 ea
09EP1100A208	ENDPLATE, MACH	1.000 ea
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 ea
HW4500A03	GREASE FITTING, .125 NPT 1610(ALEMITE) 8	1.000 ea
HW4500A17	317400 ALEMITE GREASE RELIEF	1.000 ea
HA4066A01	PUSH IN T-DRAIN FITTING (BLACK)	1.000 ea
HW4500A05	1669B ALEM/UNIV860 GR FTG X	1.000 ea

HW4500A17	317400 ALEMITE GREASE RELIEF	1.000 ea
HA4066A01	PUSH IN T-DRAIN FITTING (BLACK)	1.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.080 lb
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 ea
HW2500A25	WOODRUFF KEY USA #1008 #BLOW CARBON STEE	1.000 ea
MG1050Y01	CELEROL BALDOR GOLD *5 GALLON BUCKET*	0.050 ga
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
LC0695	CONNECTION LABEL	1.000 ea
NP3441L	ALUM SUPER-E VPWM INVERTER READY UL EEV	1.000 ea
09PA1000	PACKAGING GROUP COMBINED PRINT	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
LD7020F06	LEAD SET, 8AWG, 6 LEAD, 20" LONG LEADS	1.000 ea
PE-0000003	ZRTG PE ASSEMBLY	1.000 ea
FE-0000013	ZRTG FE ASSEMBLY	1.000 ea

Accessories

Part number	Description	Multiplier
09-1309	C FACE KIT	A8

AC Induction Motor Performance Data
Record # 89133
Typical performance - not guaranteed values

Winding: 09WGT605-R001	**Type:** 0936M	**Enclosure:** TEFC

Nameplate Data				**200 V, 60 Hz: Single Voltage Motor**	
Rated Output (HP)			20	**Full Load Torque**	29.69 LB-FT
Volts			200	**Start Configuration**	direct on line
Full Load Amps			52	**Breakdown Torque**	102 LB-FT
R.P.M.			3510	**Pull-up Torque**	35.75 LB-FT
Hz	60	**Phase**	3	**Locked-rotor Torque**	45.36 LB-FT
NEMA Design Code	A	**KVA Code**	G	**Starting Current**	341 A
Service Factor (S.F.)			1.15	**No-load Current**	14.29 A
NEMA Nom. Eff.	91	**Power Factor**	89	**Line-line Res. @ 25ºC**	0.093 Ω
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	78°C
S.F. Amps				**Temp. Rise @ S.F. Load**	99°C
				Locked-rotor Power Factor	29.0354
				Rotor inertia	0.92 lb-ft²

Load Characteristics 200 V, 60 Hz, 20 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	63	81	88	90	91	90	91
Efficiency	88.9	91.7	92.1	91.5	90.1	88.6	90.7
Speed	3578	3560	3538	3514	3488	3459	3498
Line amperes	18.88	28.53	39.71	52.06	65.44	80.53	60.1


ABB Motors and Mechanical Inc.


WINDING # 09WGT605

20 HP 3 PH 60 HZ 3510 RPM 200 V 0936M

Typical performance - not guaranteed values.


TORQUES(LB-FT): PO=102 PU=35.75 LR=45.36 LRA=341

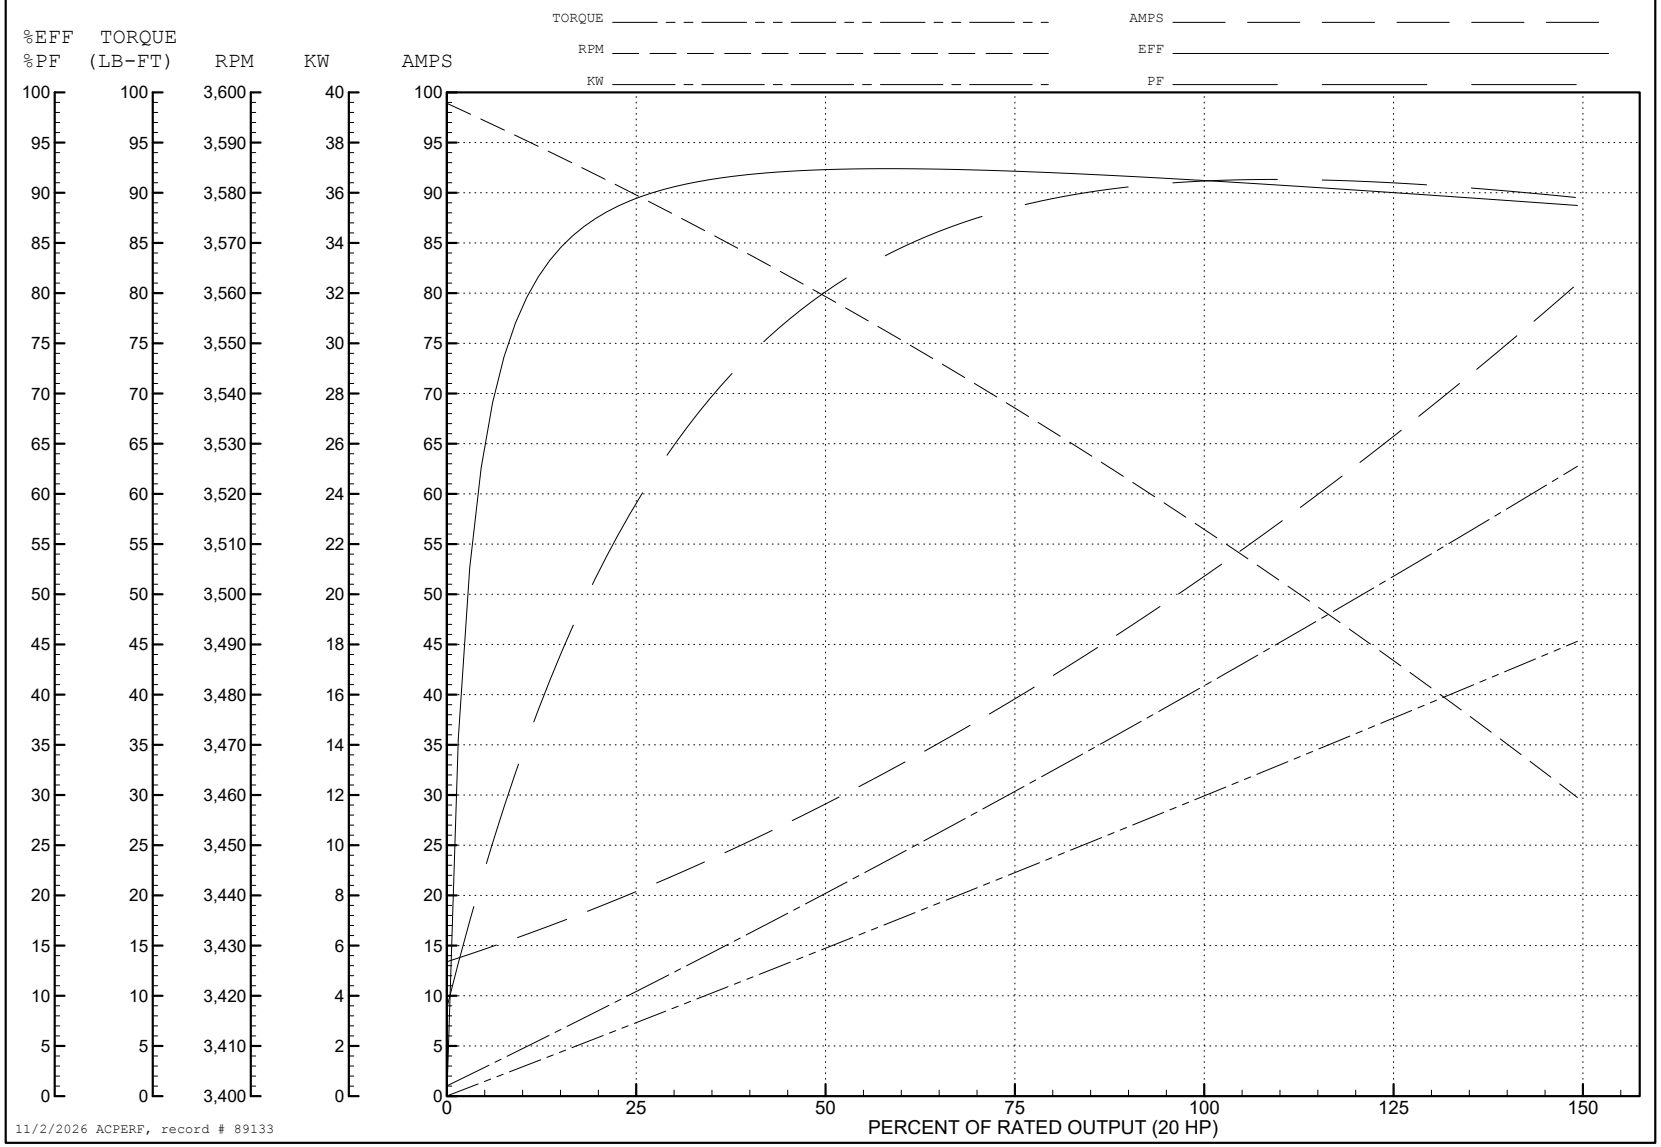

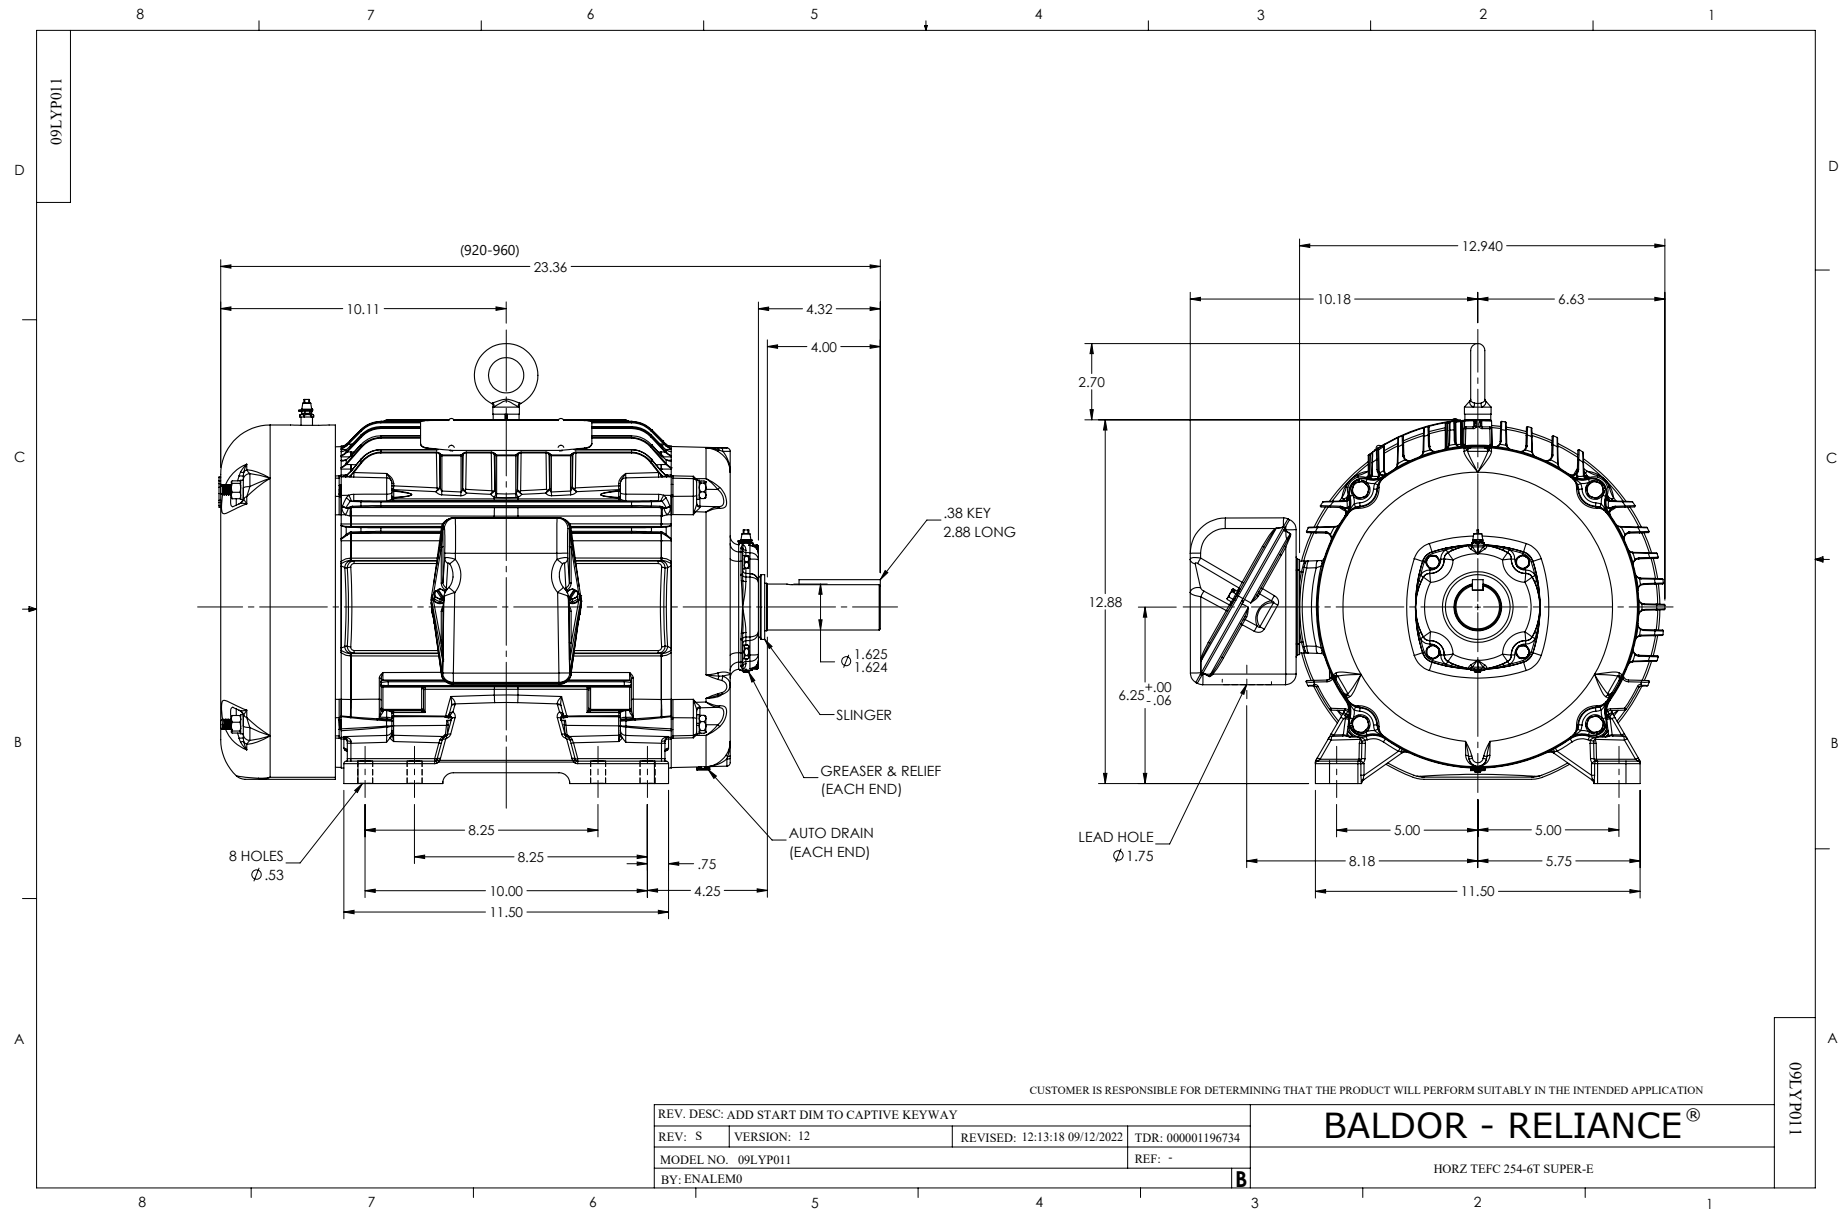

09LYP011
(920-960)
23.36
10.11
4.32
4.00
.38 KEY
2.88 LONG
Ø 1.625
1.624
SLINGER
GREASER & RELIEF
(EACH END)
AUTO DRAIN
(EACH END)
8 HOLES
Ø .53
8.25
8.25
.75
10.00
4.25
11.50
12.940
10.18
6.63
2.70
12.88
6.25 +.00 -.06
LEAD HOLE
Ø 1.75
5.00
5.00
8.18
5.75
11.50
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: ADD START DIM TO CAPTIVE KEYWAY
REV: S
VERSION: 12
REVISED: 12:13:18 09/12/2022
TDR: 000001196734
MODEL NO. 09LYP011
REF: -
BY: ENALEM0
B
BALDOR - RELIANCE®
HORZ TEFC 254-6T SUPER-E
09LYP011

CD0695


TYPICAL WYE–CONNECTED MOTOR

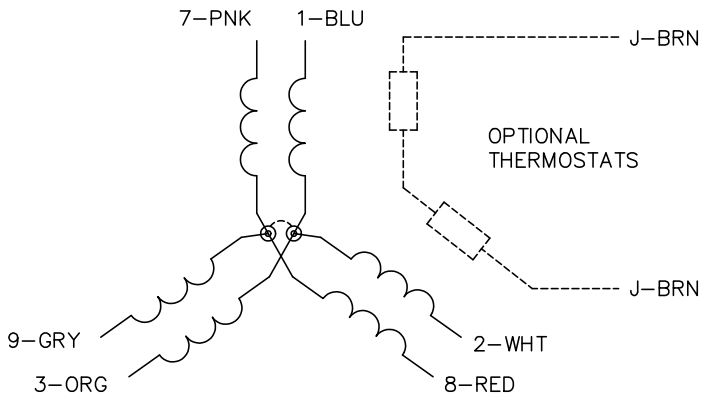


START CONNECTION



RUN CONNECTION



TYPICAL DELTA–CONNECTED MOTOR

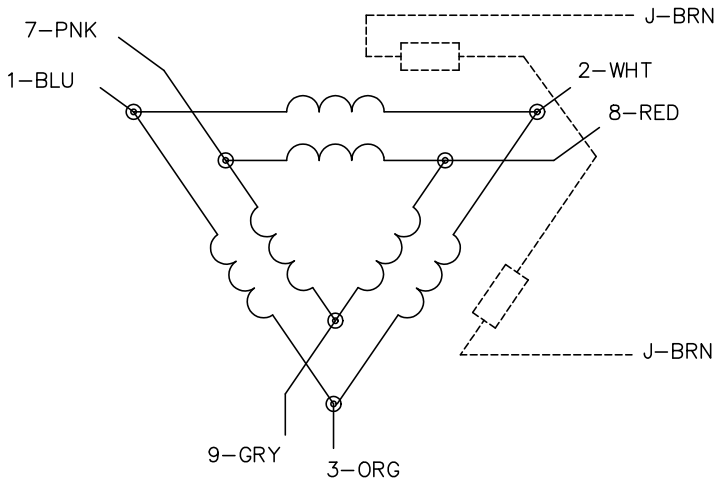

NOTES:

1. MOTOR MAY BE WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0695

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: C	BY: JLP	REVISED: 01/21/99 3:19	TDR: 0171435
CD0695		FILE: AAA00005151	MDL: –
		MTL: –	3PH, SV, 6 LEADS, PART WINDING START