ABB BALDOR RELIANCE

Customer information packet

EM4400T-G

100HP, 1785RPM, 3PH, 60HZ, 405T, A40064M, TEFC
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/1/2026 7:03:07 PM

Specifications

Enclosure	TEFC
Frame	405T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	100.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
	460.0 V @ 60 HZ
Agency Approvals	CSA EEV
	CCSA US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Current @ Voltage	112.000 A @ 460.0 V
	224.000 A @ 230.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	95.4 %
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	112.0 a
Insulation Class	H
Inverter Code	Not Inverter
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Motor Lead Quantity/Wire Size	3 @ 2 AWG

Part Detail

Revision	N
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A40WG1610
Layout	617429-001
Eff. date	09-19-2023
CD Diagram	416820-002
Poles	04
Leads	3#2,6#4
Proprietary	False
Created date	07-17-2013

Motor Standards	NEMA
Motor Type	A40064M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	38.04 IN
Power Factor	87
Product Family	General Industrial
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1785 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate

NP2496L
MOBIL POLYREX EM

NP2381L										
SPEC NO.	P40G3927		**CAT.NO.**	EM4400T-G				**FRAME**	405T	
HP	100//75	**PHASE**	3	**DESIGN**	B	**TYPE**	P			
RPM	1785//1485	**HZ**	60//50	**AMB**	40	**SF**	1.15			
VOLTS	230/460//190/380	**DUTY**	CONT			**INSUL.CLASS**	H			
AMPS	224/112//206/103			**ENCL**	TEFC	**CODE**	G			
DRIVE END BEARING	80BC03J30X		**NEMA-NOM-EFFICIENCY**	95.4						
OPP D.E. BEARING	80BC03J30X									
SER.NO.										
	VPWM INV DUTY 10:1 CT AT 1.0SF							**MOTOR WEIGHT**		

Parts List

Part number	Description	Quantity
SA267716	SA P40G3927	1.000 ea
RA254386	RA P40G3927	1.000 ea
421948032	LABEL, MYLAR	1.000 ea
000692000FF	N/P	1.000 ea
NP2496L	MOTOR LUBE NAMEPLATE	1.000 ea
000613006PU	N/P (RELEASE QTY 10,000) UL CSA LABEL	1.000 ea
000692000VD	LABEL WARNING	1.000 ea
NP2381L	SS, SUPER-E, CURUS EEV, CC	1.000 ea
412118006A	DRAIN	2.000 ea
LB1459	AEGIS SGR LABEL "AEGISLBL-100"	1.000 ea
089412501A	BRKT FTMT G400 FIN MACH 6316 89412500WCA	1.000 ea
415072001B	CLAMP	1.000 ea
083198101A	G400 STD FAN COVER MACHINING	1.000 ea
034180012DA	KEY 1X4X1/4X1-1/2 L	1.000 ea
078548001R	FAN KB 234/150 (84) 400	1.000 ea
004824015A	GREASE POLYREX EM	0.880 lb
032018020EK	HHCS 5/8-11X2-1/2 PLTD.	4.000 ea
032018008CK	HHCS 3/8-16X1L PLATED	4.000 ea
032018008CK	HHCS 3/8-16X1L PLATED	4.000 ea
032018024CK	HHCS 3/8-16X3 PLTD.	3.000 ea
034692005AA	P PLUG 3/4"BLK.	1.000 ea
415096002A	CPLG 1/8 HEX TYPE	1.000 ea
410700000DA	WAVY SPRING WASHER	1.000 ea
034000014AB	WSH ID.406 OD.812 TH.065	4.000 ea
034530052AB	P/NIP 1/8X6-1/2 Zinc	1.000 ea
034530056BB	P/NIP 1/4X7 SCHED 40	1.000 ea
034690001AB	1/8" NPT SQHDPLG	1.000 ea
034631002AB	BUSH 1/4 TO 1/8 PLTD.	1.000 ea
089412501A	BRKT FTMT G400 FIN MACH 6316 89412500WCA	1.000 ea
032018020EK	HHCS 5/8-11X2-1/2 PLTD.	4.000 ea
032018024CK	HHCS 3/8-16X3 PLTD.	3.000 ea

034690002AB	PPLG 1/4" PLTD.	1.000 ea
077176000L	C/BOX, PAINTED 440	1.000 ea
BP5328	SHAFT GRD BRUSH (SGR-89.4-3CFHA)	1.000 ea
077176001A	CBOX Cover 360-400	1.000 ea
043292000AJ	GASK 320-400	1.000 ea
402731001A	GASK 360-440	1.000 ea
418150003A	GREASE FITTING CAP	1.000 ea
MG1025Y17	WILKOFAST, 789.701, SUPER E PEARL GOLD	0.375 ga
032018005DL	1/2-13 X 5/8 SILICON BRONZE HHCS	1.000 ea
032018005AK	HHCS 1/4-20X5/8 PLATED	4.000 ea
035000001A	ALFTG 1/8" 1610-BL	1.000 ea
415000115H	T/LUG #2AWG-4/0AWG	1.000 ea
406099000A	PLUG - FAN COVER 320-440	1.000 ea
035000001A	ALFTG 1/8" 1610-BL	1.000 ea
418150003A	GREASE FITTING CAP	1.000 ea
033775004EA	DRSCR #6-1/4 304 S.S.	2.000 ea
034180044JA	KEY 3/4X3/4X5-1/2 L	1.000 ea
604797045	STD. 400 FRAME SKID	1.000 ea
032510024D	CARRIAGE BOLT - 444	2.000 ea
034001016AB	WSHR .562ID 1.375OD .109	2.000 ea
034001014AB	FLAT WASHER 3/8"PLATED	2.000 ea
033300014AC	HEX NUT, SHIPPING - 400	2.000 ea
604799003C	PLASTIC BAG 42X32X46	1.000 ea

S/O	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	405T	100	P	3/60	1785	230/460

AMPS	DUTY	AMB °C/ INSUL	S.F.	NEMA DESIGN	CODE LETTER	ENCLOSURE
224/112	CONT	40/H	1.15	B	G	TEFC

E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)
596956	418142-33-RE	---	---	.0123/.0492

PERFORMANCE

LOAD	HP	AMPERES	RPM	% POWER FACTOR	% EFFICIENCY
NO LOAD	0	28.6	1800	5.49	0
1/4	25.0	39.2	1796	64.3	93.0
2/4	50.0	59.5	1792	82.5	95.4
3/4	75.0	84.6	1788	86.7	95.7
4/4	100	112	1783	87.4	95.4
5/4	125	141	1778	87.3	94.9

SPEED TORQUE


	RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES
LOCKED ROTOR	0	151	445	725
PULL UP	360	136	400	706
BREAKDOWN	1721	250	735	382
FULL LOAD	1783	100	295	112

AMPERES SHOWN FOR 460 VOLT CONNECTION. IF OTHER CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

TYPICAL DATA
XE MOTOR-DATA-NEMA NOM. EFF. 95.4 PCT
GUARANTEED MIN EFF. 94.5 PCT

ABB	DRAWN BY: J. P. TSAO CHECKED BY: W. L. SMITH APPROVED BY: W. L. SMITH DATE: 06/13/14	AC MOTOR PERFORMANCE DATA	A40WG1610-R006 DATE ISSUED 06/13/14

FRAME 405T	RPM 1785	S.F. 1.15	ROTOR 418142-33-RE
HP 100	VOLTS 230/460	NEMA DESIGN B	TEST S.O. TYPICAL DATA
TYPE P	AMPS 224/112	CODE LETTER G	TEST DATE ---
PHASE / HERTZ 3/60	DUTY CONT	ENCLOSURE TEFC	STATOR RES. @ 25°C .0123/.0492
	AMB °C / INSUL 40/H	E/S 596956	OHMS (BETWEEN LINES)

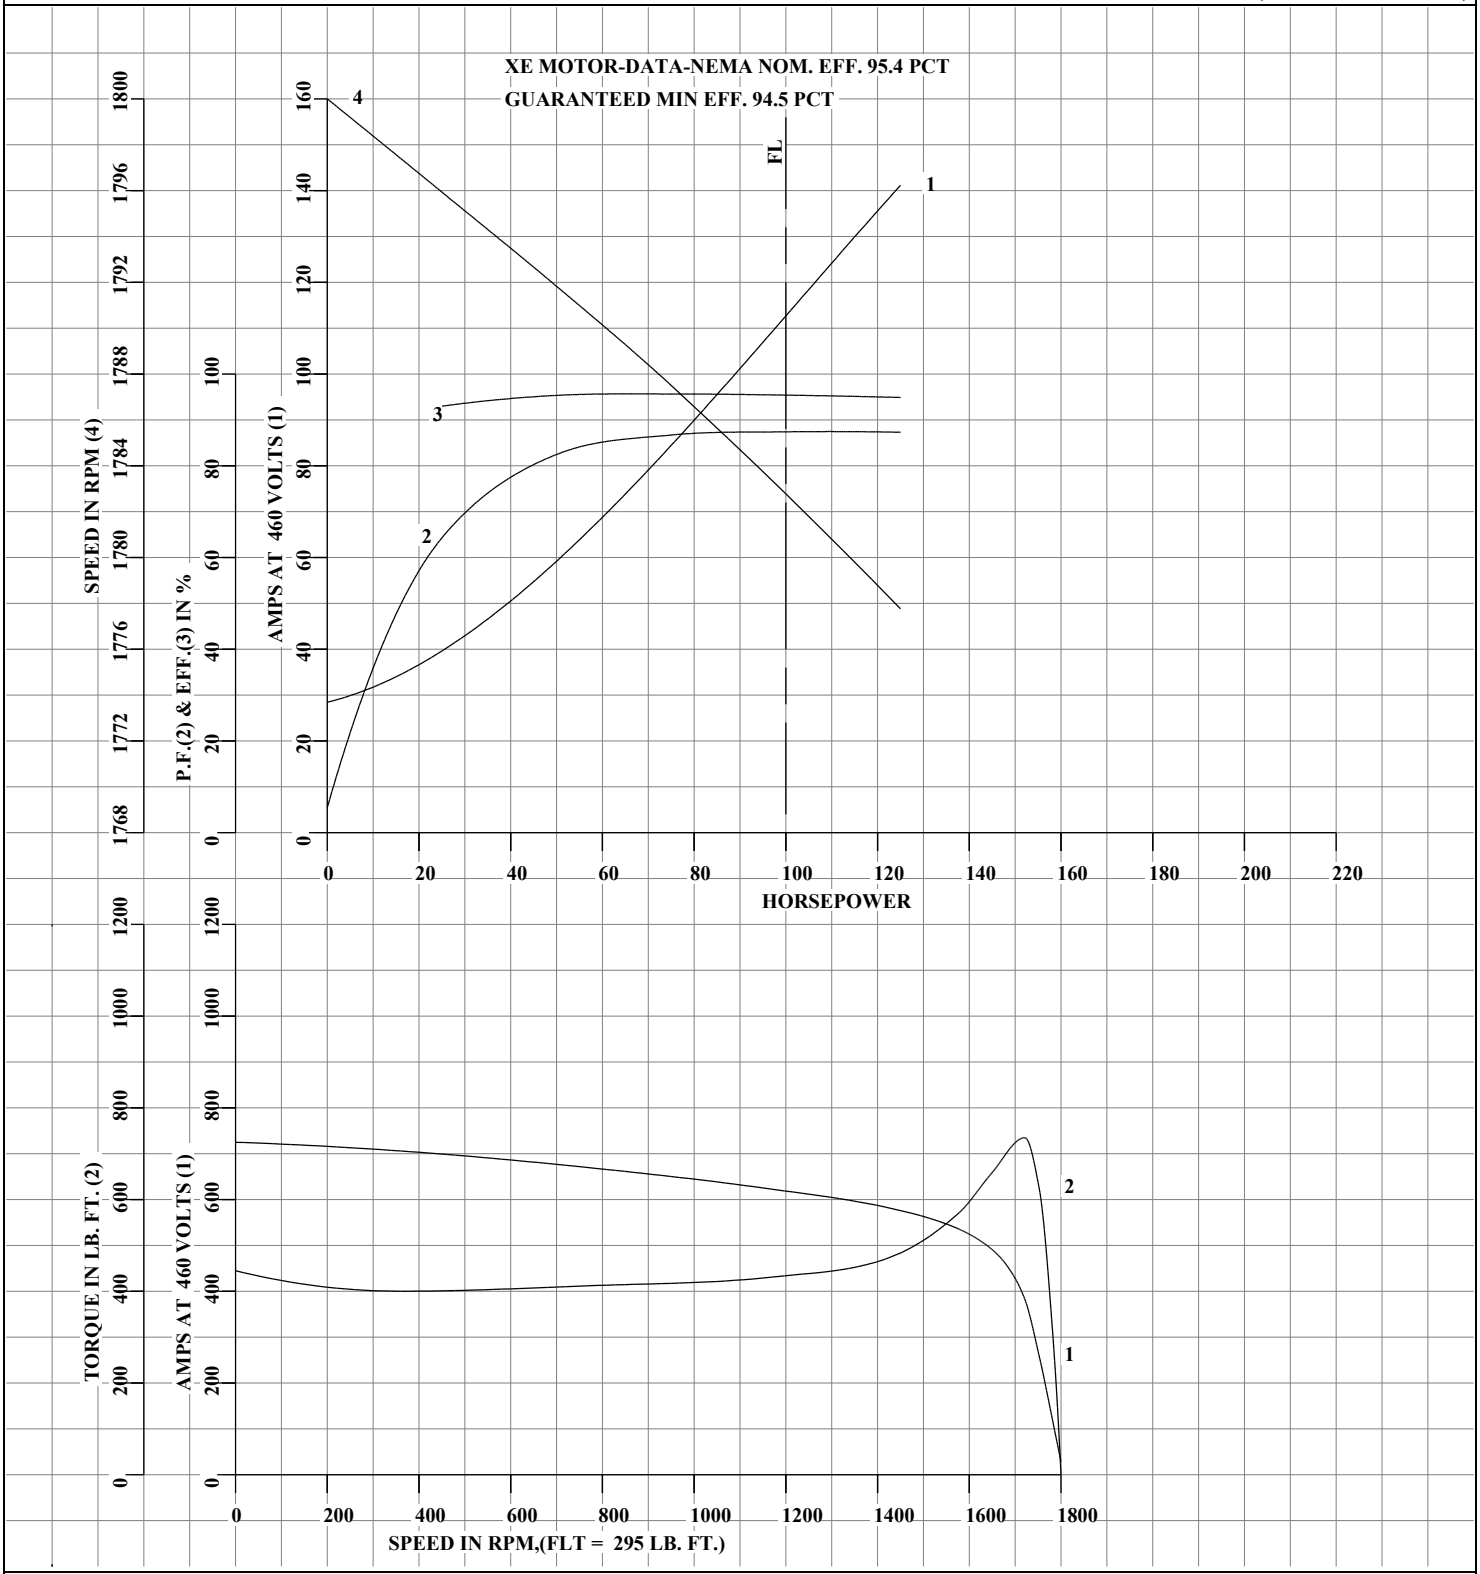

AMPERES SHOWN FOR 230/460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

ABB	DRAWN BY: J. P. TSAO CHECKED BY: W. L. SMITH APPROVED BY: W. L. SMITH DATE: 06/13/14	AC MOTOR PERFORMANCE DATA	A40WG1610-R006 ISSUE DATE 06/13/14

DUTY MASTER ALTERNATING CURRENT MOTORS

617429-001

ENCLOSURE: TOTALLY ENCLOSED


SQUIRREL-CAGE INDUCTION


MOUNTING: FOOT, F1


G405T/G404T FRAME MOUNTING HOLES


COOLING: FAN COOLED

STEEL CONDUIT BOX

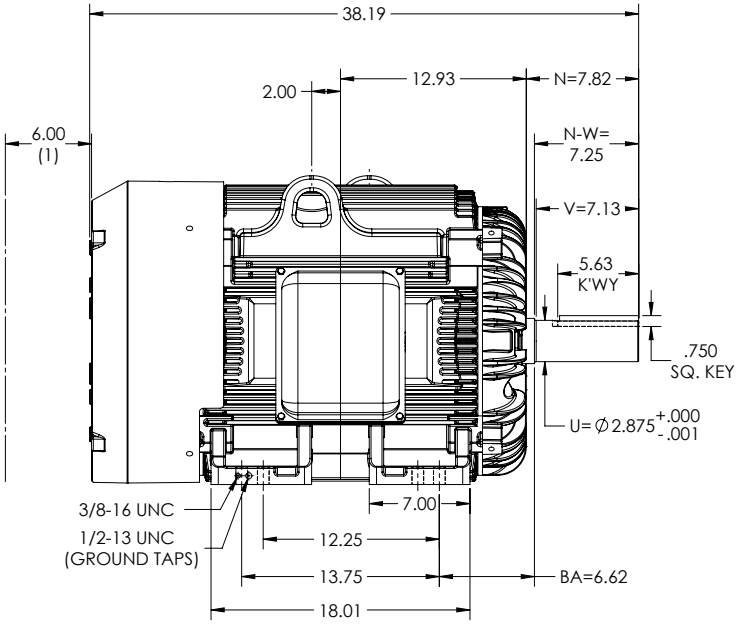

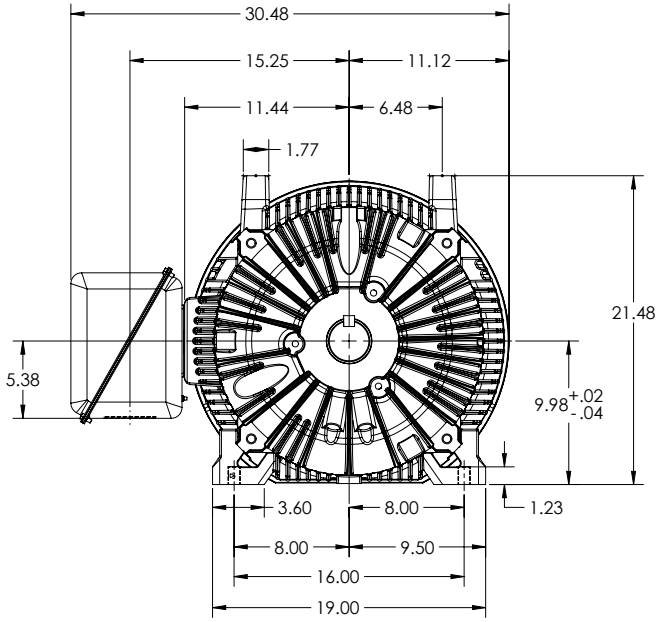

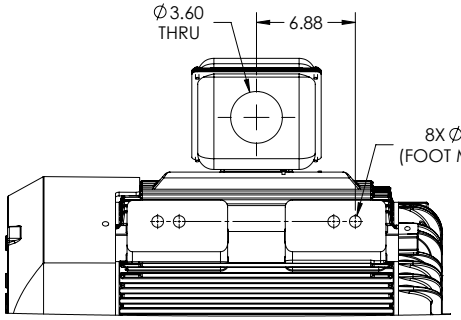

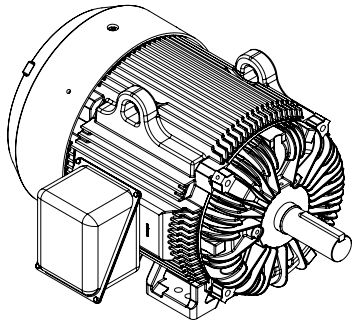

DIMENSIONS ARE IN INCHES.
MOTOR WEIGHT: 1350 LBS, MAY VARY BY 15% DEPENDING ON RATING.
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT MOTOR PERFORMANCE IS SUITABLE IN THE APPLICATION.

(1) OBSTRUCTION MUST NOT ENCROACH ON AIR INLET.

IF MOUNTING CLEARANCE DETAILS ARE REQUIRED, CONSULT FACTORY.

MAX PERMISSIBLE SHAFT RUNOUT WHEN MEASURED AT END OF STANDARD SHAFT EXTENSION IS .003" T.I.R.

SHEET NUMBER 1 OF 2

617429-001

REV. DESC: CHG D.E. BRKT WITHOUT FACE DRAINS			
REV: D	VERSION: 04	REVISED: 11:04:59 03/09/2022	TDR: 000001187401
MODEL NO. 617429-001			REF:
BY: RAGGDM	Material:	C	G405T/404T STD TEFC F1 FOOTED STEEL CONDUIT BOX

BALDOR

617429-001

DUTY MASTER ALTERNATING CURRENT MOTORS

617429-001

ENCLOSURE: TOTALLY ENCLOSED


SQUIRREL-CAGE INDUCTION


MOUNTING: FOOT, F1


G405T/G404T FRAME MOUNTING HOLES


COOLING: FAN COOLED

STEEL CONDUIT BOX

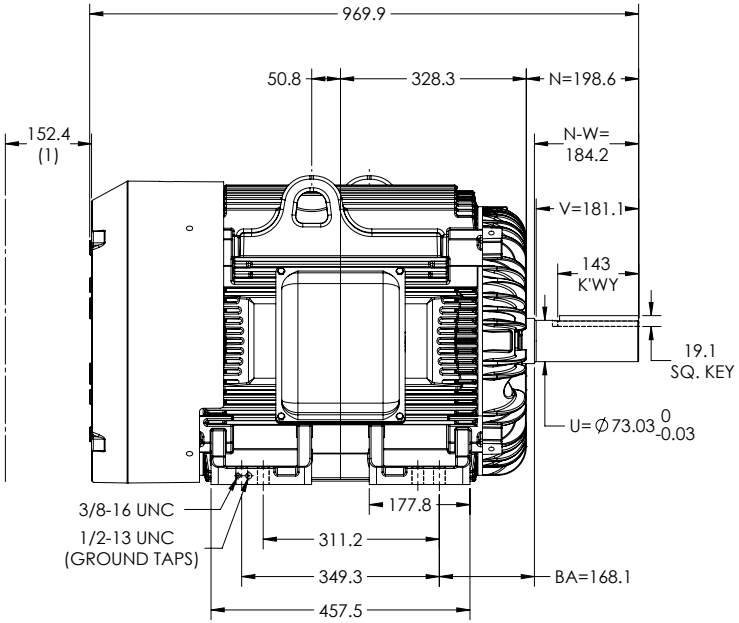

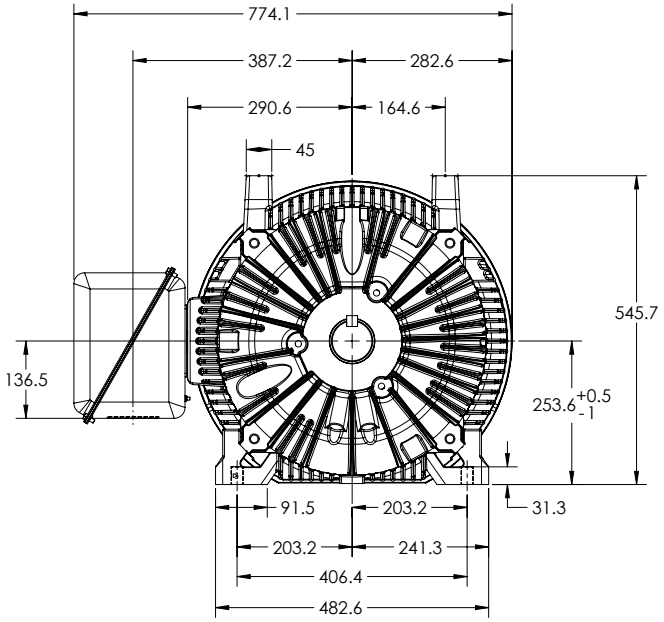

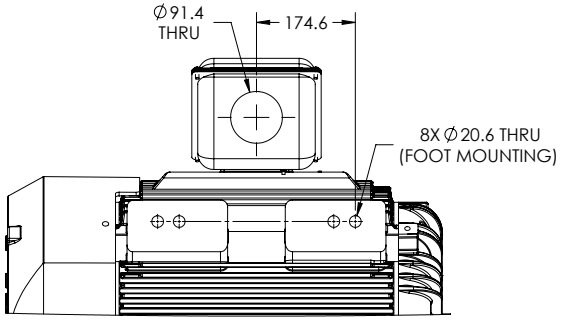

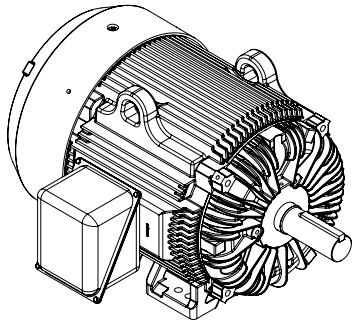

(1) OBSTRUCTION MUST NOT ENCROACH ON AIR INLET.

IF MOUNTING CLEARANCE DETAILS ARE REQUIRED, CONSULT FACTORY.

MAX PERMISSIBLE SHAFT RUNOUT WHEN MEASURED AT END OF STANDARD SHAFT EXTENSION IS .08 T.I.R.

DIMENSIONS ARE IN MILLIMETERS.
MOTOR WEIGHT: 612, MAY VARY BY 15% DEPENDING ON RATING.
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT MOTOR PERFORMANCE IS SUITABLE IN THE APPLICATION.

SHEET NUMBER 2 OF 2	REV. DESC: CHG D.E. BRKT WITHOUT FACE DRAINS		
617429-001	REV: D	VERSION: 04	REVISED: 11:04:59 03/09/2022
	MODEL NO. 617429-001		REF:
	BY: RAGGDM	Material:	C


BALDOR


G405T/404T STD TEFC F1 FOOTED STEEL CONDUIT BOX

617429-001

416820-002

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 9 LEAD DELTA-CONNECTED

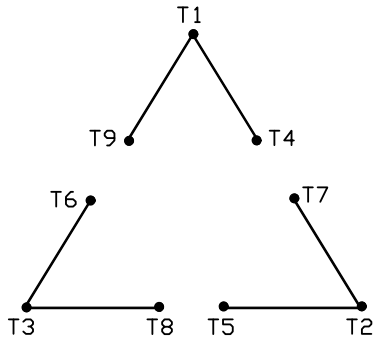

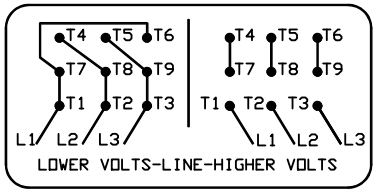

(N. P. 1575-B)

REV. DESC: ADJUST TEXT DARKNESS		
REV. LTR: B	VERSION: 02	TDR: 000001285318
FILE: \RAG\00022\453	REVISED: 09:36:26 09/24/2026	BY: USJOSUL
MTL: –		

ABB

CONN DIAG – STANDARD 9 LEAD, DELTA-CONNECTED

SH1 of 1

416820-002