ABB BALDOR RELIANCE

Customer information packet

FDEM3546T-5

1HP, 1775RPM, 3PH, 60HZ, 143T, 3522M, TEFC, F1
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/1/2026 6:59:43 PM

Specifications

Enclosure	TEFC
Frame	143T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	1.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	NEMA PREMIUM NEMA_PREMIUM UR CSA EEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	1.300 A @ 575.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	85.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	1.3 a
Insulation Class	F

Part Detail

Revision	E
Type	AC
Mech. spec.	35E2354
Base	
Status	PRD/A
Elec. spec.	35WGG119
Layout	35LYE2354
Eff. date	11-27-2024
CD Diagram	CD0006
Poles	04
Leads	3#18 Y
Proprietary	False
Created date	01-10-2022

Inverter Code	Inverter Ready
KVA Code	N
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	3 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3522M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	13.29 IN
Power Factor	67
Product Family	General Purpose
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1774 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3126L										
CAT.NO.	FDEM3546T-5									
SPEC.	35E2354G119G1									
HP	1									
VOLTS	575									
AMP	1.3									
RPM	1775									
FRAME	143T		**HZ**	60			**PH**	3		
SER.F.	1.15	**CODE**	M	**DES**	B	**CL**	F			
NEMA-NOM-EFF	85.5	**PF**	70							
RATING	40C AMB-CONT									
CC	010A									
DE	6205		**ODE**	6203						
ENCL	TEFC	**SN**								
	SFA 1.4									

Parts List

Part number	Description	Quantity
SA402215	SA 35E2354G119G1	1.000 ea
RA393478	RA 35E2354G119G1	1.000 ea
34FN3002B01	EXTERNAL FAN, PLASTIC, .637/.639 HUB W/	1.000 ea
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 ea
35CB3009	35 CB W/1.09 DIA. LEAD HOLE @ 6:	1.000 ea
36GS1000SP	GASKET-CONDUIT BOX, .06 THICK #SV-330 LE	1.000 ea
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
35EP3122K00	MASTER ODE,203 BRG,.683SH,#26 DRN,FH MTG	1.000 ea
HW5100A03	WAVY WASHER (W1543-017)	1.000 ea
35EP3123G00	MASTER DE,205 BRG,1.623SH,#26 DRN	1.000 ea
HW4600H11	SEAL 0.938 X 1.624 X 0.250 SINGLE LIP DB	1.000 ea
HW4600B32SP	V-RING SLINGER 1.000 X 1.540 X .24 VITON	1.000 ea
XY1032A02	10-32 HEX NUT DIRECTIONAL SERRATION	4.000 ea
51XB1214A16	12-14X1.00 HXWSSLD SERTYB	1.000 ea
35FH4005A32	IEC FH NO GRSR W/3 HOLES - PRIMED	1.000 ea
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 ea
35CB4521GX	CONDUIT BOX LID KIT **ORDER INDIV PARTS	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 ea
HW2501D13	KEY, 3/16 SQ X 1.375	1.000 ea
HA7000A01	KEY RETAINER 7/8" DIA SHAFT	1.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
MJ5001A27	32220KN GRAY SEALER *MIN BUY 4 QTS=1GAL	0.001 qt
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
MG1025C02	WILKOFAST SG, 787.105, TAN	0.017 ga
HA3100A18	THRUBOLT 10-32 X 9.250	4.000 ea
LC0006	CONNECTION LABEL	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
NP3126L	ALUM FARM DUTY SUPER-E UL CSA-EEV PREM	1.000 ea
36PA1000	PKG GRP, PRINT PK1016A08	1.000 ea
FE-0000001	ZRTG FE ASSEMBLY	1.000 ea

PE-0000002	ZRTG PE ASSEMBLY	1.000 ea


AC Induction Motor Performance Data
Record # 99012
Typical performance - not guaranteed values


Winding: 35WGG119-R001	**Type:** 3522M	**Enclosure:** TEFC

Nameplate Data				**575 V, 60 Hz: Single Voltage Motor**	
Rated Output (HP)			1	**Full Load Torque**	2.99 LB-FT
Volts			575	**Start Configuration**	direct on line
Full Load Amps			1.3	**Breakdown Torque**	13.4 LB-FT
R.P.M.			1775	**Pull-up Torque**	6.8 LB-FT
Hz	60	**Phase**	3	**Locked-rotor Torque**	8.3 LB-FT
NEMA Design Code	B	**KVA Code**	M	**Starting Current**	10.9 A
Service Factor (S.F.)			1.15	**No-load Current**	0.87 A
NEMA Nom. Eff.	85.5	**Power Factor**	70	**Line-line Res. @ 25ºC**	30.1 Ω
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	36°C
S.F. Amps			1.4	**Temp. Rise @ S.F. Load**	42°C
				Locked-rotor Power Factor	63.4
				Rotor inertia	0.159 lb-ft²

Load Characteristics 575 V, 60 Hz, 1 HP


% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	31	48	61	70	76	80	74
Efficiency	72.1	81.6	84.9	85.8	85.7	85	85.7
Speed	1794	1787	1781	1774	1767	1758	1770
Line amperes	0.89	0.97	1.1	1.26	1.44	1.65	1.37

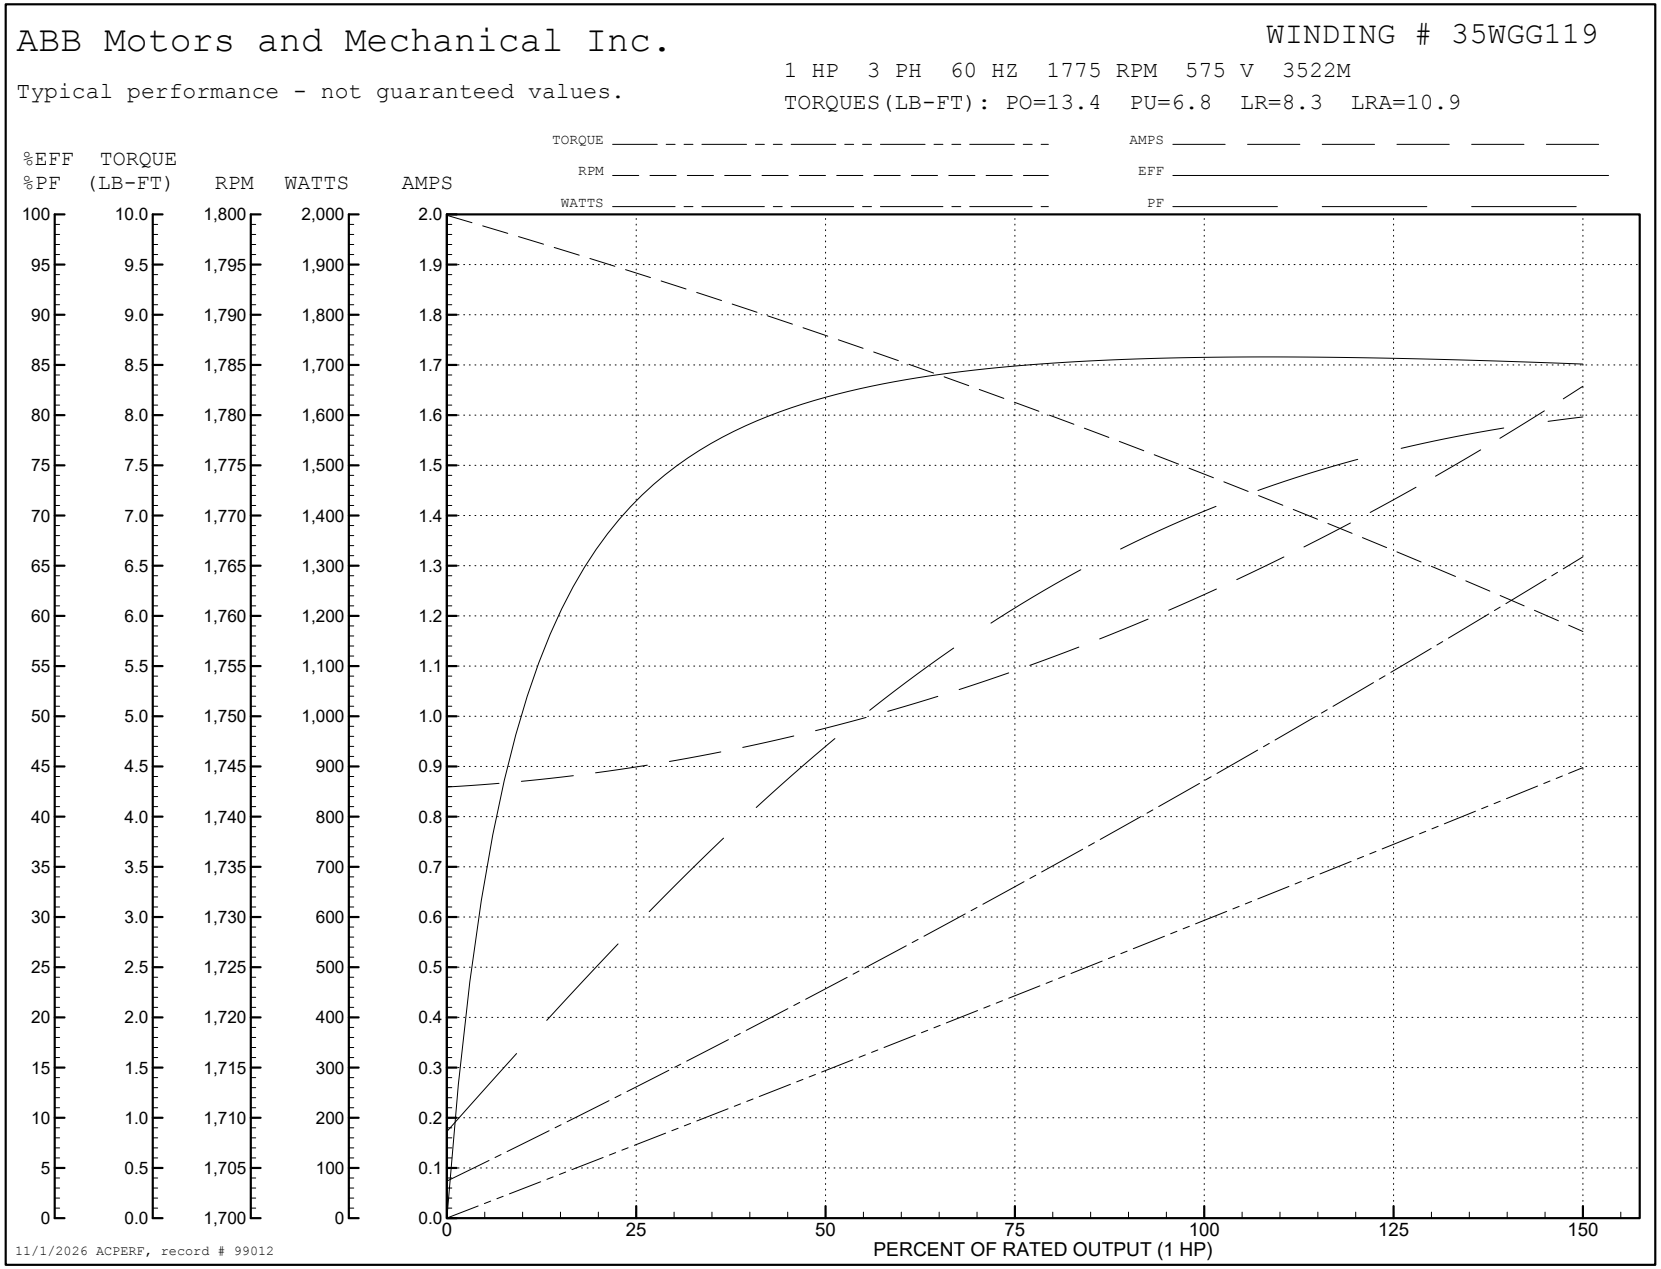

ABB Motors and Mechanical Inc.
WINDING # 35WGG119
1 HP 3 PH 60 HZ 1775 RPM 575 V 3522M
Typical performance - not guaranteed values.
TORQUES(LB-FT): PO=13.4 PU=6.8 LR=8.3 LRA=10.9
TORQUE
RPM
WATTS
AMPS
EFF
PF
%EFF
%PF
TORQUE (LB-FT)
RPM
WATTS
AMPS
PERCENT OF RATED OUTPUT (1 HP)
11/1/2026 ACPERF, record # 99012

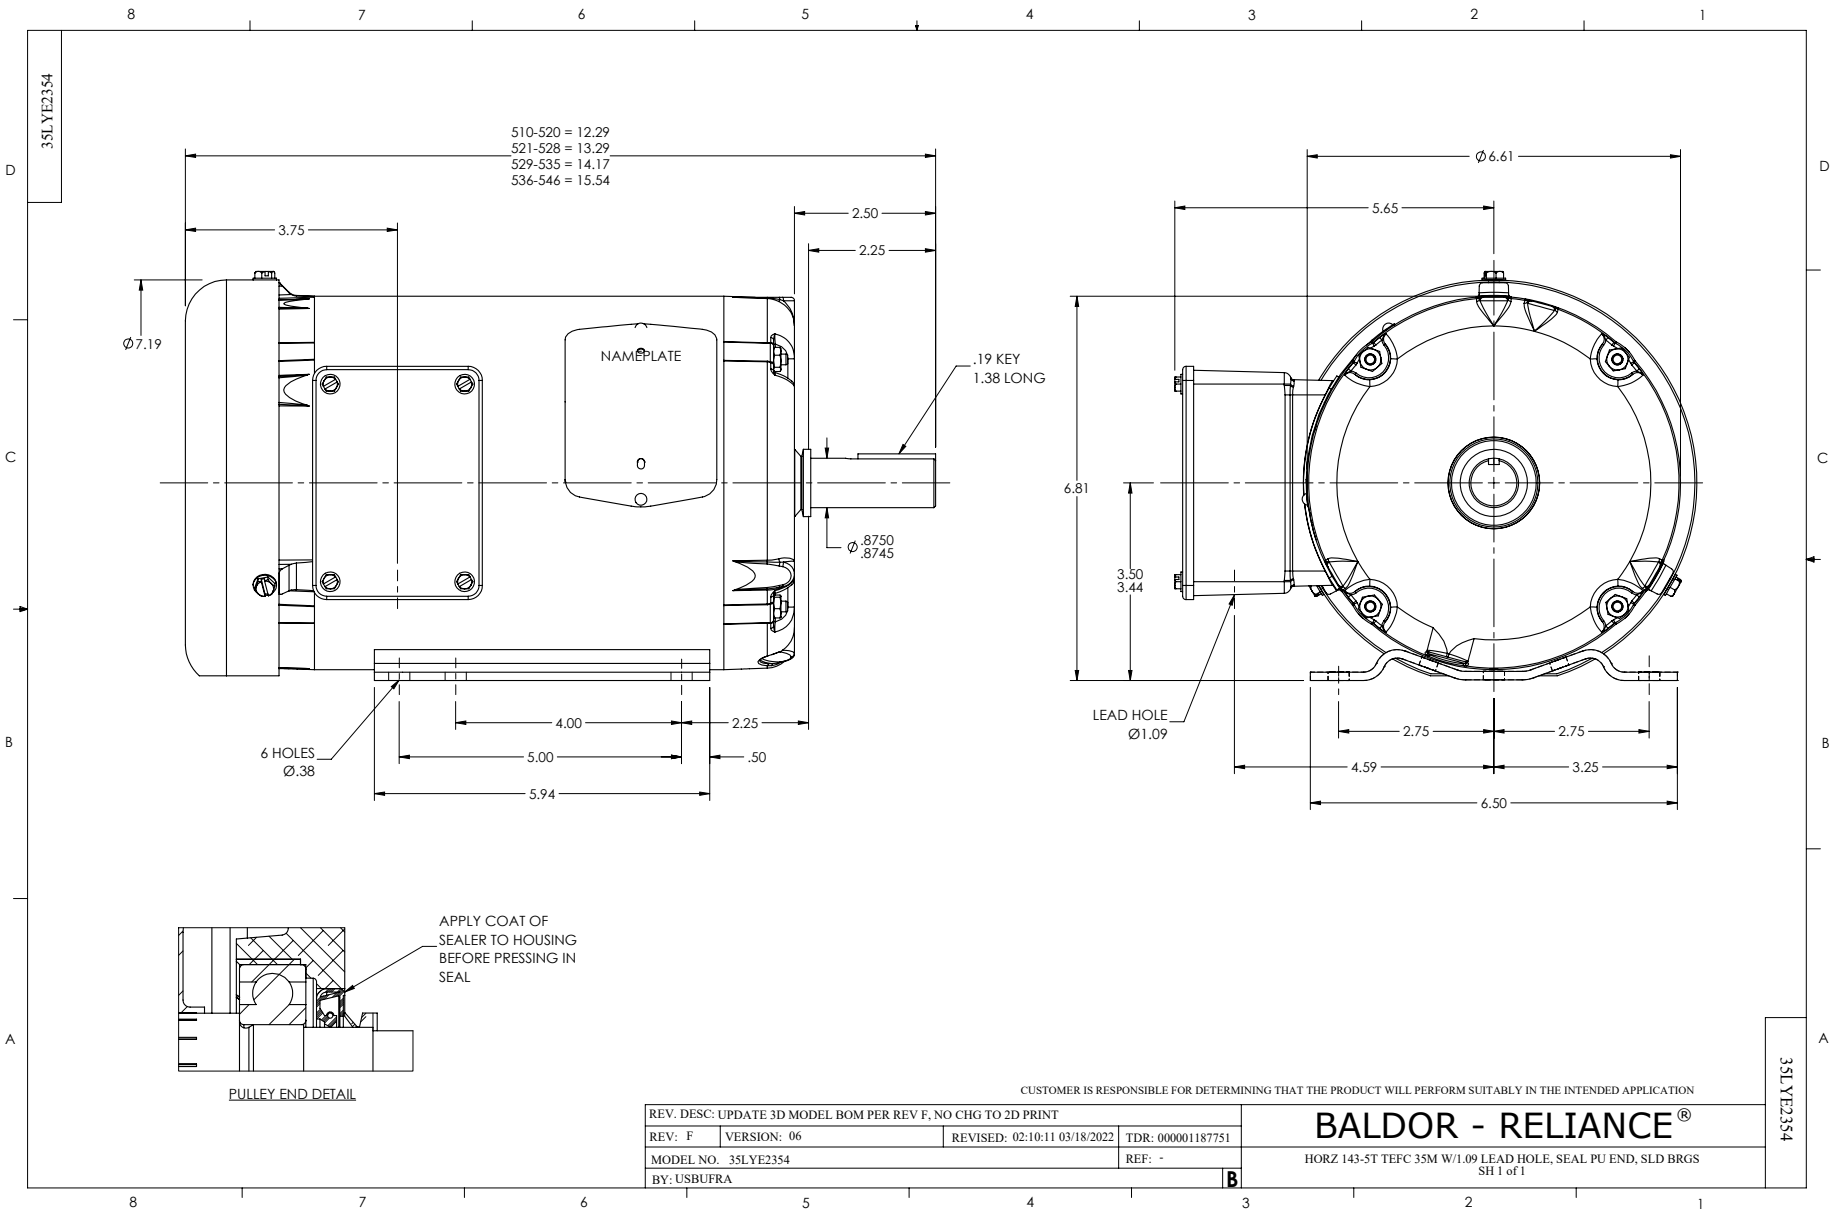
35LYE2354
510-520 = 12.29
521-528 = 13.29
529-535 = 14.17
536-546 = 15.54
3.75
2.50
2.25
Ø7.19
NAMEPLATE
.19 KEY
1.38 LONG
Ø .8750
Ø .8745
6 HOLES
Ø.38
4.00
2.25
5.00
.50
5.94
Ø6.61
5.65
6.81
3.50
3.44
LEAD HOLE
Ø1.09
2.75
2.75
4.59
3.25
6.50
APPLY COAT OF
SEALER TO HOUSING
BEFORE PRESSING IN
SEAL
PULLEY END DETAIL
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: UPDATE 3D MODEL BOM PER REV F, NO CHG TO 2D PRINT
REV: F
VERSION: 06
REVISED: 02:10:11 03/18/2022
TDR: 000001187751
MODEL NO. 35LYE2354
REF: -
BY: USBUFRA
B
BALDOR - RELIANCE®
HORZ 143-5T TEFC 35M W/1.09 LEAD HOLE, SEAL PU END, SLD BRGS
SH 1 of 1
35LYE2354


CD0006

TYPICAL WYE–CONNECTED MOTOR

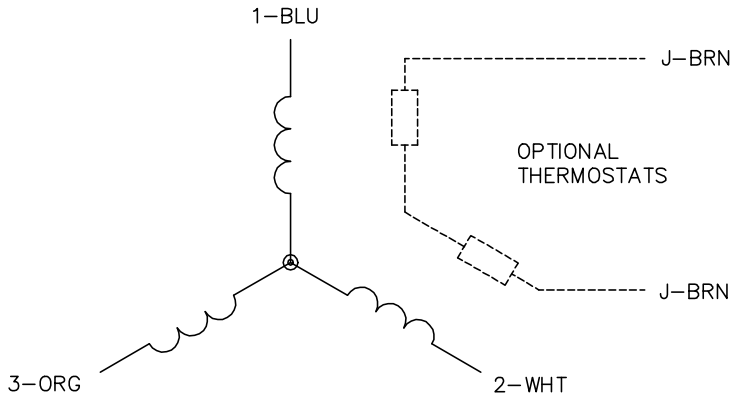



TYPICAL DELTA–CONNECTED MOTOR

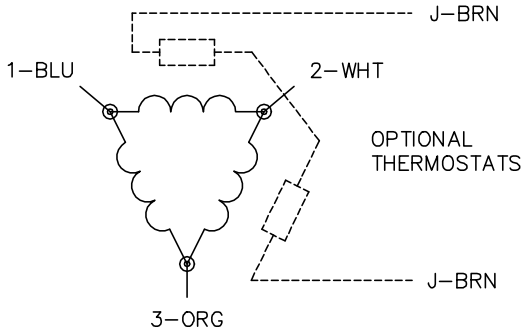

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10:24:49 02/19/2019	BY: ENBRIR0
MTL: –		

BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1