ABB BALDOR RELIANCE

Customer information packet

FDEM3710T

7.5HP, 1770RPM, 3PH, 60HZ, 213T, 3738M, TEFC, F
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/1/2026 7:38:12 PM

Specifications

Enclosure	TEFC
Frame	213T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	7.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
	460.0 V @ 60 HZ
Agency Approvals	CSA
	CSA EEV
	NEMA PREMIUM
	UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	9.500 A @ 460.0 V
	20.000 A @ 208.0 V
	19.000 A @ 230.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.7 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None

Part Detail

Revision	D
Type	AC
Mech. spec.	37N377
Base	
Status	PRD/A
Elec. spec.	37WGL864
Layout	37LYN377
Eff. date	11-27-2024
CD Diagram	CD0005
Poles	04
Leads	9#14
Proprietary	False
Created date	11-11-2020

Heater Indicator	No Heater
High Voltage Full Load Amps	9.5 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 14 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3738M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	19.02 IN
Power Factor	80
Product Family	General Purpose
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	1.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1770 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3126L									
CAT.NO.	FDEM3710T								
SPEC.	37N377L864G1								
HP	7.5								
VOLTS	230/460								
AMP	19/9.5								
RPM	1770								
FRAME	213T	**HZ**	60			**PH**	3		
SER.F.	1.15	**CODE**	J	**DES**	A	**CL**	F		
NEMA-NOM-EFF	91.7	**PF**	80						
RATING	40C AMB-CONT								
CC	010A								
DE	6307	**ODE**	6206						
ENCL	TEFC	**SN**							
	IP44								

Parts List

Part number	Description	Quantity
SA387936	SA 37N377L864G1	1.000 ea
RA378276	RA 37N377L864G1	1.000 ea
37FN3002C01	EXFN, PLASTIC, 6.00 OD, 1.155 ID	1.000 ea
HW3200A01	3/8-16X3/4 EYEBOLT WELDED F/S	1.000 ea
37CB3006	37 CB CASTING W/1.38 LEAD HOLE @ 6:00	1.000 ea
37GS1000SP	GASKET, CONDUIT BOX STD., .06 THICK LEXI	1.000 ea
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
37EP3101A04	FR ENDPLATE, MACH	1.000 ea
HW5100A06	W2420-025 WVY WSHR (WB)	1.000 ea
37PE3100A42	37 PUEP ASSEMBLY FOR SEAL	1.000 ea
HW4600H13	SEAL 1.375 X 2.125 X 0.313 SINGLE LIP DB	1.000 ea
HW4600B33	V-RING SLINGER 1.375 X 1.890 X .35 VITON	1.000 ea
XY3118A12	5/16-18 HEX NUT DIRECTIONAL SERRATION	4.000 ea
07FH4007A07	IEC FH NO GRSR, NOTCH @ 6:00 & 3 F/C HOL	1.000 ea
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 ea
37CB4516	LIPPED LID FOR 37 FRAME NEC KOBX	1.000 ea
37GS1008	37 GS FOR CB LID - LEXIDE	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 ea
HW2501F21	KEY, 5/16 SQ X 2.375	1.000 ea
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
MJ5001A27	32220KN GRAY SEALER *MIN BUY 4 QTS=1GAL	0.001 qt
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
MG1025C02	WILKOFAST SG, 787.105, TAN	0.028 ga
HA3104A17	5/16-18X13.250 T-BLT/OHIO	4.000 ea
LC0005	CONN.DIA.,TY M,9-LD,DUAL VOLT,REVERSING	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
NP3126L	ALUM FARM DUTY SUPER-E UL CSA-EEV PREM	1.000 ea
37PA1074	PALLET PACK GRP, PRINT BOX PK1026A06	1.000 ea
FE-0000001	ZRTG FE ASSEMBLY	1.000 ea

LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea

AC Induction Motor Performance Data
Record # 85467
Preliminary Data Sheet

Winding: 37WGL864-R001	**Type:** 3738M	**Enclosure:** TEFC

Nameplate Data				**460 V, 60 Hz: High Voltage Connection**	
Rated Output (HP)			7.5	**Full Load Torque**	22.2 LB-FT
Volts			230/460	**Start Configuration**	direct on line
Full Load Amps			19.0/9.5	**Breakdown Torque**	69.8 LB-FT
R.P.M.			1770	**Pull-up Torque**	31.5 LB-FT
Hz	60	**Phase**	3	**Locked-rotor Torque**	41 LB-FT
NEMA Design Code	A	**KVA Code**	J	**Starting Current**	70.7 A
Service Factor (S.F.)			1.15	**No-load Current**	4.32 A
NEMA Nom. Eff.	91.7	**Power Factor**	80	**Line-line Res. @ 25ºC**	1.48 Ω
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	64°C
S.F. Amps			21.4/10.7	**Temp. Rise @ S.F. Load**	84°C
				Locked-rotor Power Factor	41.9
				Rotor inertia	0.934 lb-ft²

Load Characteristics 460 V, 60 Hz, 7.5 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	42	64	75	80	83	84	83
Efficiency	87.1	91.4	92	91.7	90.7	89.6	90.7
Speed	1793	1786	1778	1770	1760	1750	1761
Line amperes	4.83	6.03	7.64	9.5	11.6	13.9	10.7


ABB Motors and Mechanical Inc.


WINDING # 37WGL864

7.5 HP 3 PH 60 HZ 1770 RPM 460 V 3738M


Typical performance - not guaranteed values.


TORQUES(LB-FT): PO=69.8 PU=31.5 LR=41 LRA=70.7

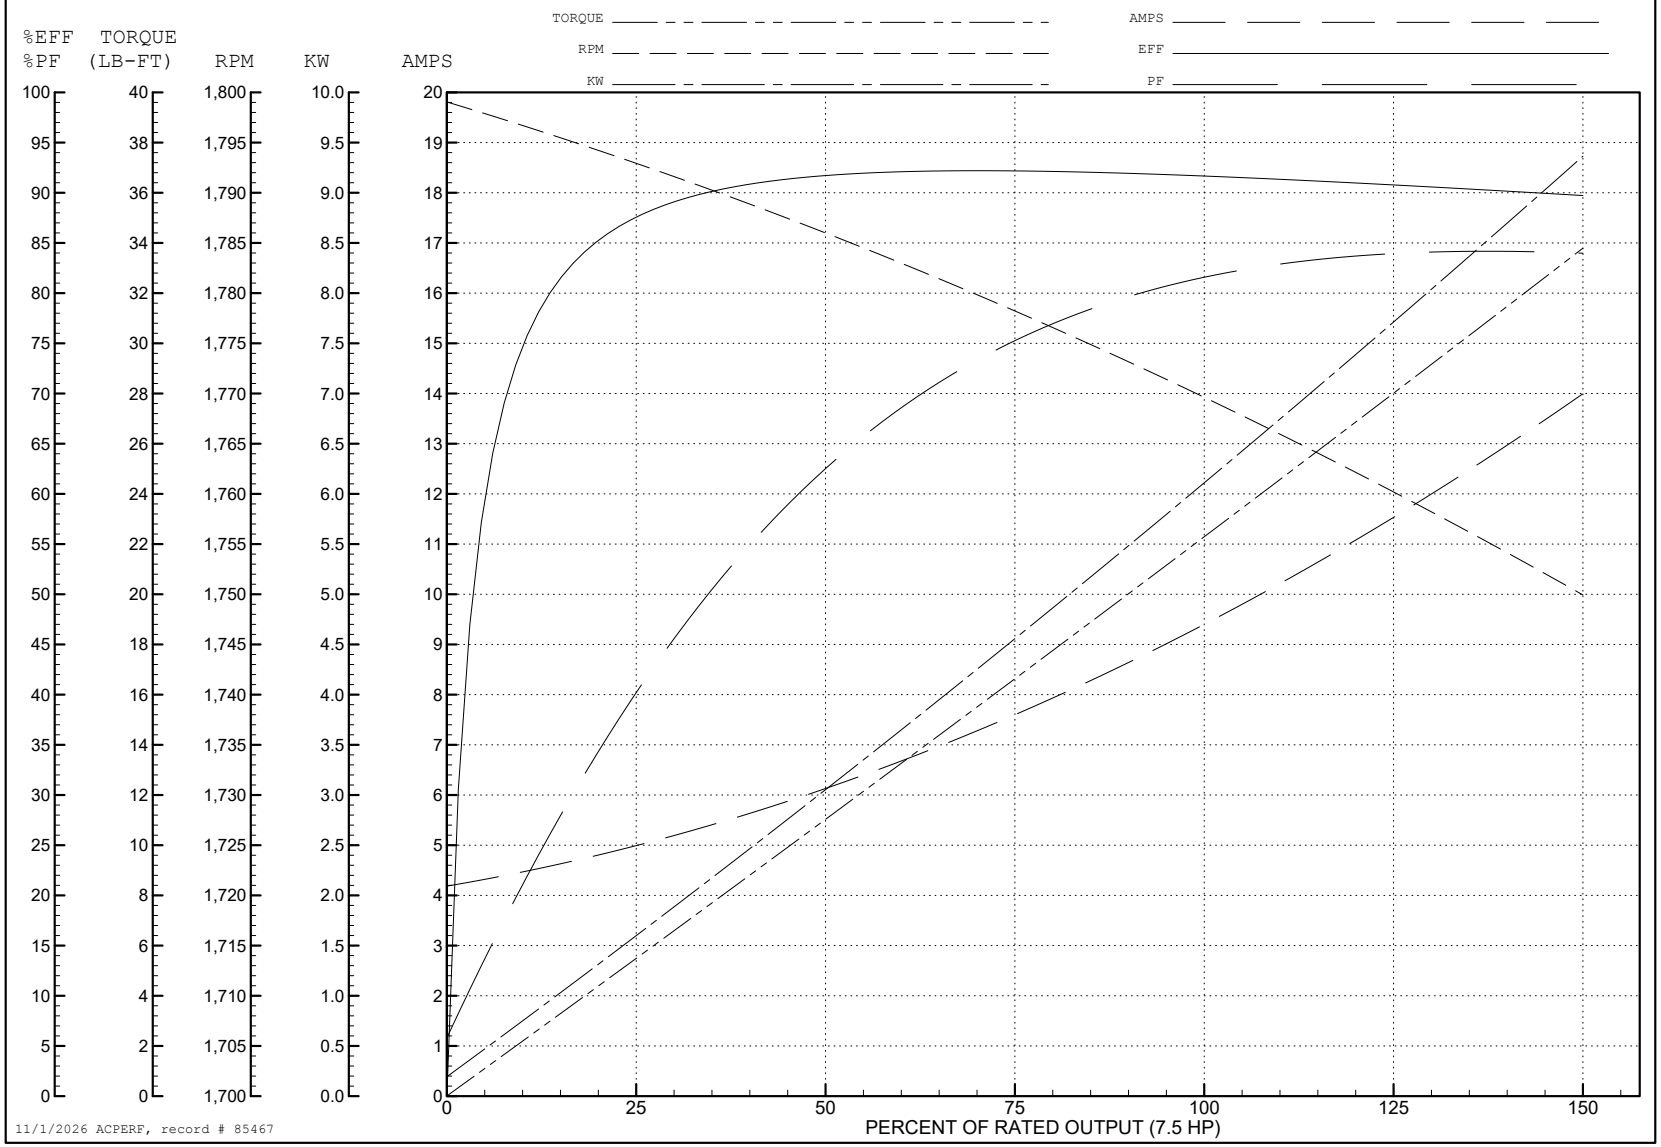


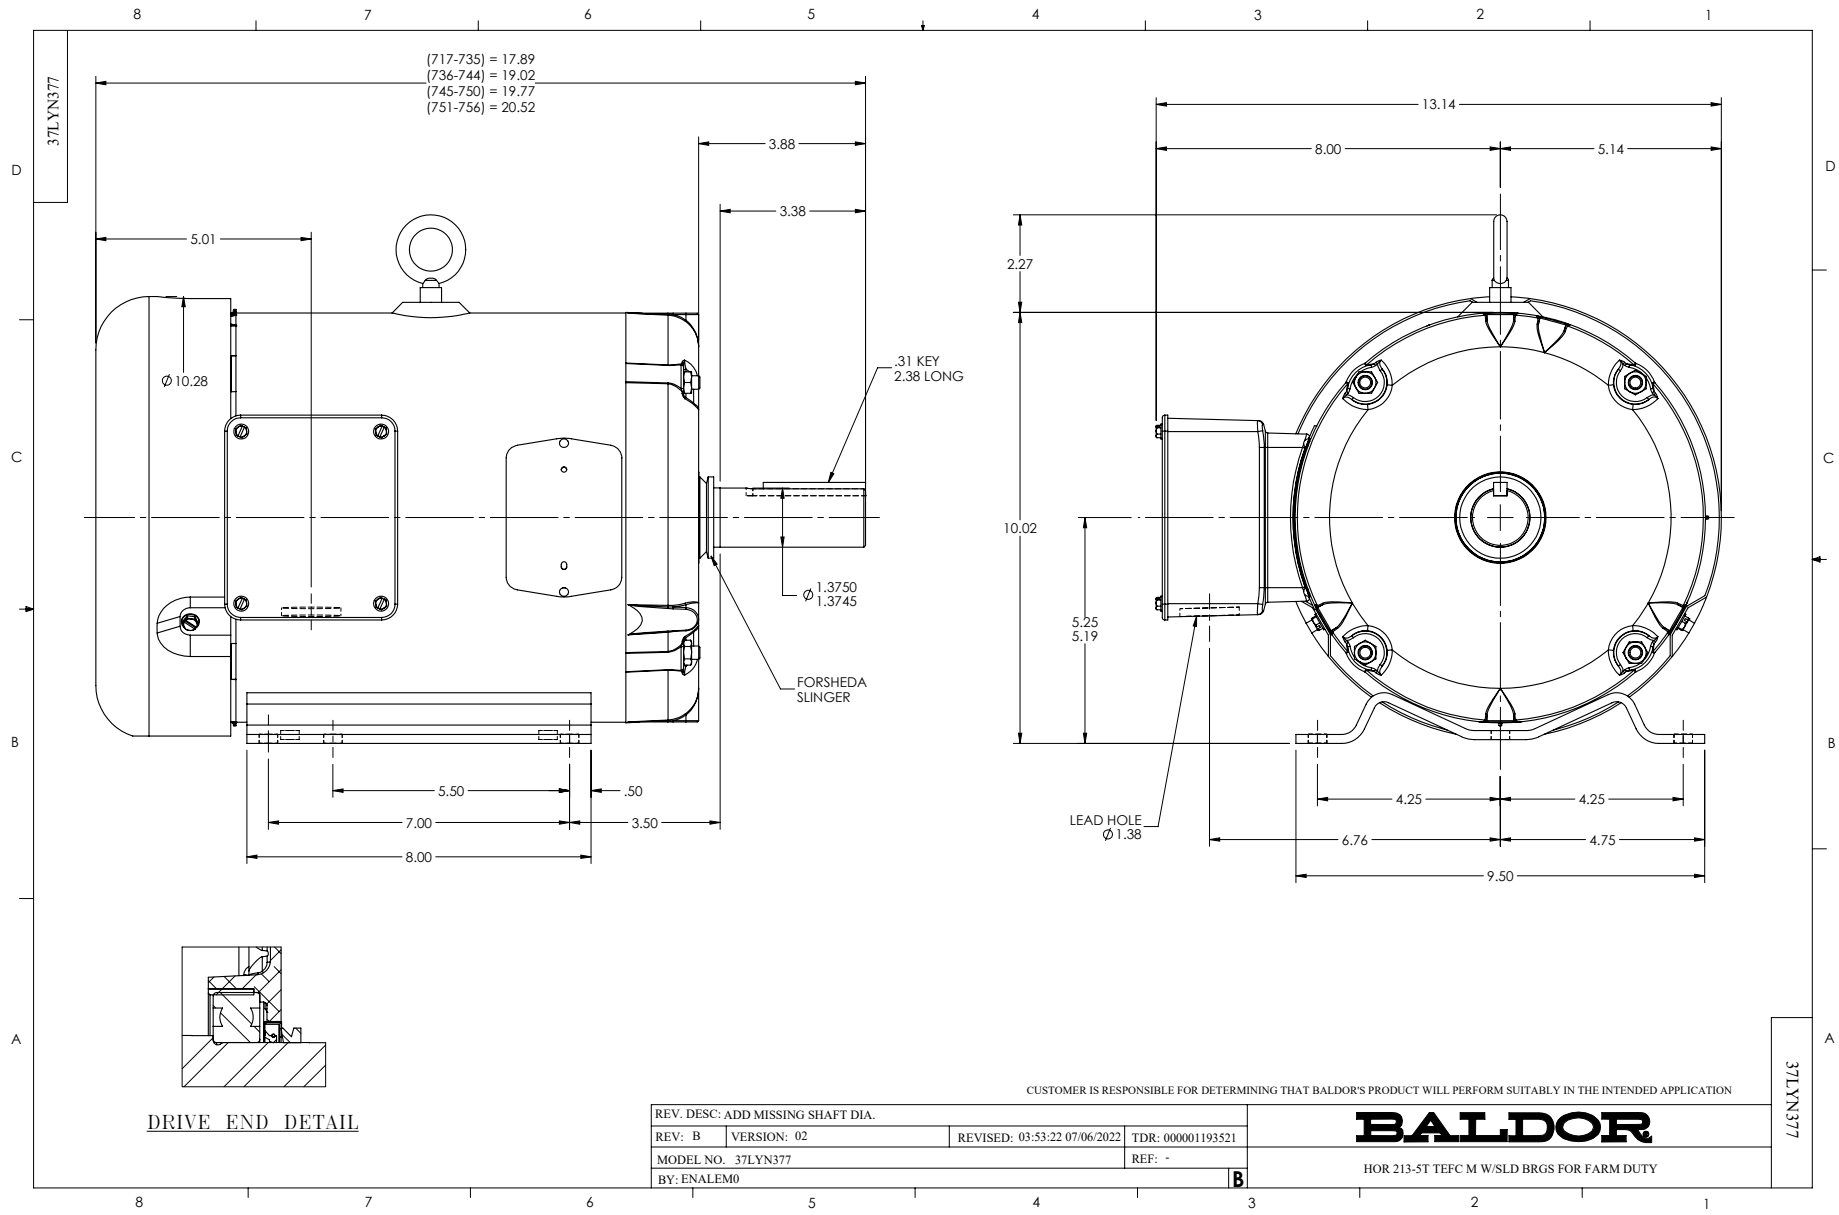
37LYN377
(717-735) = 17.89
(736-744) = 19.02
(745-750) = 19.77
(751-756) = 20.52
3.88
3.38
5.01
Ø 10.28
.31 KEY
2.38 LONG
Ø 1.3750
1.3745
FORSHEDA
SLINGER
5.50
.50
7.00
3.50
8.00
13.14
8.00
5.14
2.27
10.02
5.25
5.19
LEAD HOLE
Ø 1.38
4.25
4.25
6.76
4.75
9.50
DRIVE END DETAIL
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: ADD MISSING SHAFT DIA.
REV: B
VERSION: 02
REVISED: 03:53:22 07/06/2022
TDR: 000001193521
MODEL NO. 37LYN377
REF: -
BY: ENALEM0
B
BALDOR
HOR 213-5T TEFC M W/SLD BRGS FOR FARM DUTY
37LYN377

CD0005

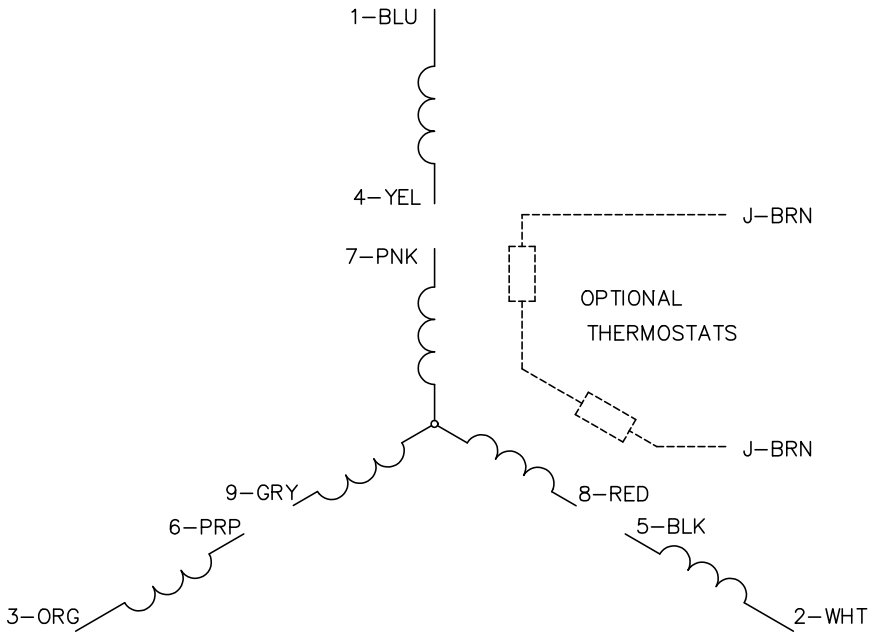

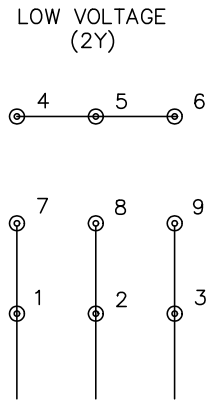

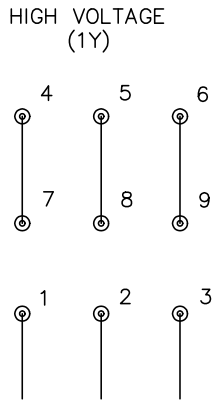

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
CD0005		FILE: AAA00005140	MDL: –
		MTL: –	3PH, DV, 9 LEADS