

ABB BALDOR RELIANCE III

Customer information packet

FDL3712TM

10HP, 1730RPM, 1PH, 60HZ, 213T, 3752LC, TEFC, F

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	213T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	10.000 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	39.000 A @ 230.0 V
Design Code	L
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	86.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	39.0 a
Insulation Class	F
Inverter Code	Not Inverter
KVA Code	H

Part Detail

Revision	E
Type	AC
Mech. spec.	37N374
Base	
Status	PRD/A
Elec. spec.	37WGT913
Layout	37LYN374
Eff. date	12-02-2025
CD Diagram	CD0152
Poles	04
Leads	2#10 A PH,3#14 B PH
Proprietary	False
Created date	11-20-2020

Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	2 @ 10 AWG, A PH
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3750LC
Mounting Arrangement	F1
Number of Poles	4
Overall Length	21.37 IN
Power Factor	96
Product Family	General Purpose
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	1.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1730 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	Manual Thermal Overload
Winding Thermal 1 Location	KO
Winding Thermal 2	None

Nameplate

NP1280L									
CAT.NO.	FDL3712TM								
SPEC.	37N374T913G1								
HP	10								
VOLTS	230								
AMP	39								
RPM	1730								
FRAME	215T	HZ		60		PH		1	
SER.F.	1.00	CODE		H	DES		L	CL	F
NEMA-NOM-EFF	86.5	PF		96					
RATING	40C AMB-CONT								
CC									
DE	6307	ODE		6206					
ENCL	TEFC	SN							

Parts List

Part number	Description	Quantity
SA388023	SA 37N374T913G1	1.000 ea
RA378367	RA 37N374T913G1	1.000 ea
OC3050F09SP	CAPACITOR 50 MFD 370 VAC	2.000 ea
TPLED1024SP	THERMAL 1PH 1.5 MAN REF LED945 TDR #5817	1.000 ea
EC1216C06SP	ELEC CAP, 216-259 MFD, 250V, 2.06D X 4.	4.000 ea
37FN3002A01SP	EXFN, PLASTIC, 9.00 OD, 1.155 ID	1.000 ea
51XB1214A20	12-14X1.25 HXWSSLD SERTYB	1.000 ea
HW3200A01	3/8-16X3/4 EYEBOLT WELDED F/S	1.000 ea
37CB3804A04	CAPAC BOX MACH	1.000 ea
37GS3015	GASKET, CAPAC BOX	1.000 ea
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	4.000 ea
37CB4509	CAPAC BOX LID, STAMPED	1.000 ea
37GS3016	GASKET, CAPAC BOX LID	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	6.000 ea
HA6003A47	CAPAC CLAMP	1.000 ea
HA6003A45	CAPAC CLAMP - CLIP (WHITE ZINC PLATED)	2.000 ea
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	4.000 ea
HA2001A09	SPACER, .218 ID X .937 LG	2.000 ea
RM1015	BOOT FOR 1.50 MANUAL THERMALS	1.000 ea
51XN1032A28	10-32 X 1 3/4 HX WS SL SR	2.000 ea
XY1032A02	10-32 HEX NUT DIRECTIONAL SERRATION	2.000 ea
HW1000A10	#10 FLAT WASHER (SAE)	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
HW3001B01	BRASS CUP WASHER, FOR #10 SCREW	1.000 ea
37EP3101A04	FR ENDPLATE, MACH	1.000 ea
13XF0832A08	8-32 X.50 PAN HD,SLTD, TYPE F SCREW, ZIN	2.000 ea
HW5100A06	W2420-025 WVY WSHR (WB)	1.000 ea
37PE3100B33	PUEP ASSEMBLY - ROUTING PUPROSES	1.000 ea
HW4600H13	SEAL 1.375 X 2.125 X 0.313 SINGLE LIP DB	1.000 ea
XY3118A12	5/16-18 HEX NUT DIRECTIONAL SERRATION	4.000 ea
36FN3004A02	EXFN XP PULLEY, ALUM, 7.38 OD, 1.379 ID	1.000 ea

80XN2520J06	1/4-20 X 3/8 SET SCREW, HEX SOC, CUP PT	2.000 ea
07FH4007A33	IEC FAN CVR W/NOTCH FOR 37CB3804 CAPAC B	1.000 ea
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 ea
37FH4001A06	WASHDOWN IEC FH	1.000 ea
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 ea
HA1005A02	SLINGER, OD 2.00, ID 1.14, 206 BRG,	1.000 ea
HW2501F21	KEY, 5/16 SQ X 2.375	1.000 ea
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
LB1087	LABEL,MANUAL RESET (ROLL LABEL)	1.000 ea
MJ5001A27	32220KN GRAY SEALER *MIN BUY 4 QTS=1GAL	0.001 qt
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
37FN3002A01SP	EXFN, PLASTIC, 9.00 OD, 1.155 ID	1.000 ea
MG1025C02	WILKOFASST SG, 787.105, TAN	0.028 ga
HA3104A25	THRUBOLT .31-18 X 14.75	4.000 ea
TP5059	GENERIC WELDED THERMAL, 7" LEAD KIT	1.000 ea
SP5172A03	37 TYPE L TORQ STAT SWITCH LEAD ASSEMBLY	1.000 ea
LD5000A23	LEAD ASSY, ML1400DF10 W/#10 RING 12"	1.000 ea
NS2605	INSULATOR FOR 37 FRAMESWITCH (MH1011A10)	1.000 ea
LC0002	CONNECTION LABEL	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
NP1280L	ALUM FARM DUTY UL CC THERMAL	1.000 ea
37PA1074	PALLET PACK GRP, PRINT BOX PK1026A06	1.000 ea
FE-0000001	ZRTG FE ASSEMBLY	1.000 ea

AC Induction Motor Performance Data

Record # 21642

Typical performance - not guaranteed values

Winding: 37WGT913-R001				Type: 3752LC		Enclosure: TEFC		
Nameplate Data				230 V, 60 Hz: Single Voltage Motor				
Rated Output (HP)		10		Full Load Torque		30.48 LB-FT		
Volts		230		Start Configuration		direct on line		
Full Load Amps		39		Breakdown Torque		86.2 LB-FT		
R.P.M.		1730		Pull-up Torque		63.3 LB-FT		
Hz	60	Phase	1	Locked-rotor Torque		125 LB-FT		
NEMA Design Code		L		KVA Code	H		Starting Current	300 A
Service Factor (S.F.)		1		No-load Current		11.6 A		
NEMA Nom. Eff.		86.5		Power Factor	96		Line-line Res. @ 25°C	0.1493 Ω A Ph 0.41 Ω B Ph
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		97°C		
				Locked-rotor Power Factor		92.9		
				Rotor inertia		1.23 lb-ft²		

Load Characteristics 230 V, 60 Hz, 10 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	74	88	93	94	95	94
Efficiency	73.3	83.9	86.8	86.1	82.6	80.4
Speed	1780	1765	1746	1726	1701	1667
Line amperes	14.7	22	30.3	39.9	51	63.8


ABB Motors and Mechanical Inc.


WINDING # 37WGT913

Typical performance - not guaranteed values.



10 HP 1 PH 60 HZ 1730 RPM 230 V 3752LC

TORQUES (LB-FT): PO=86.2 PU=63.3 LR=125 LRA=300

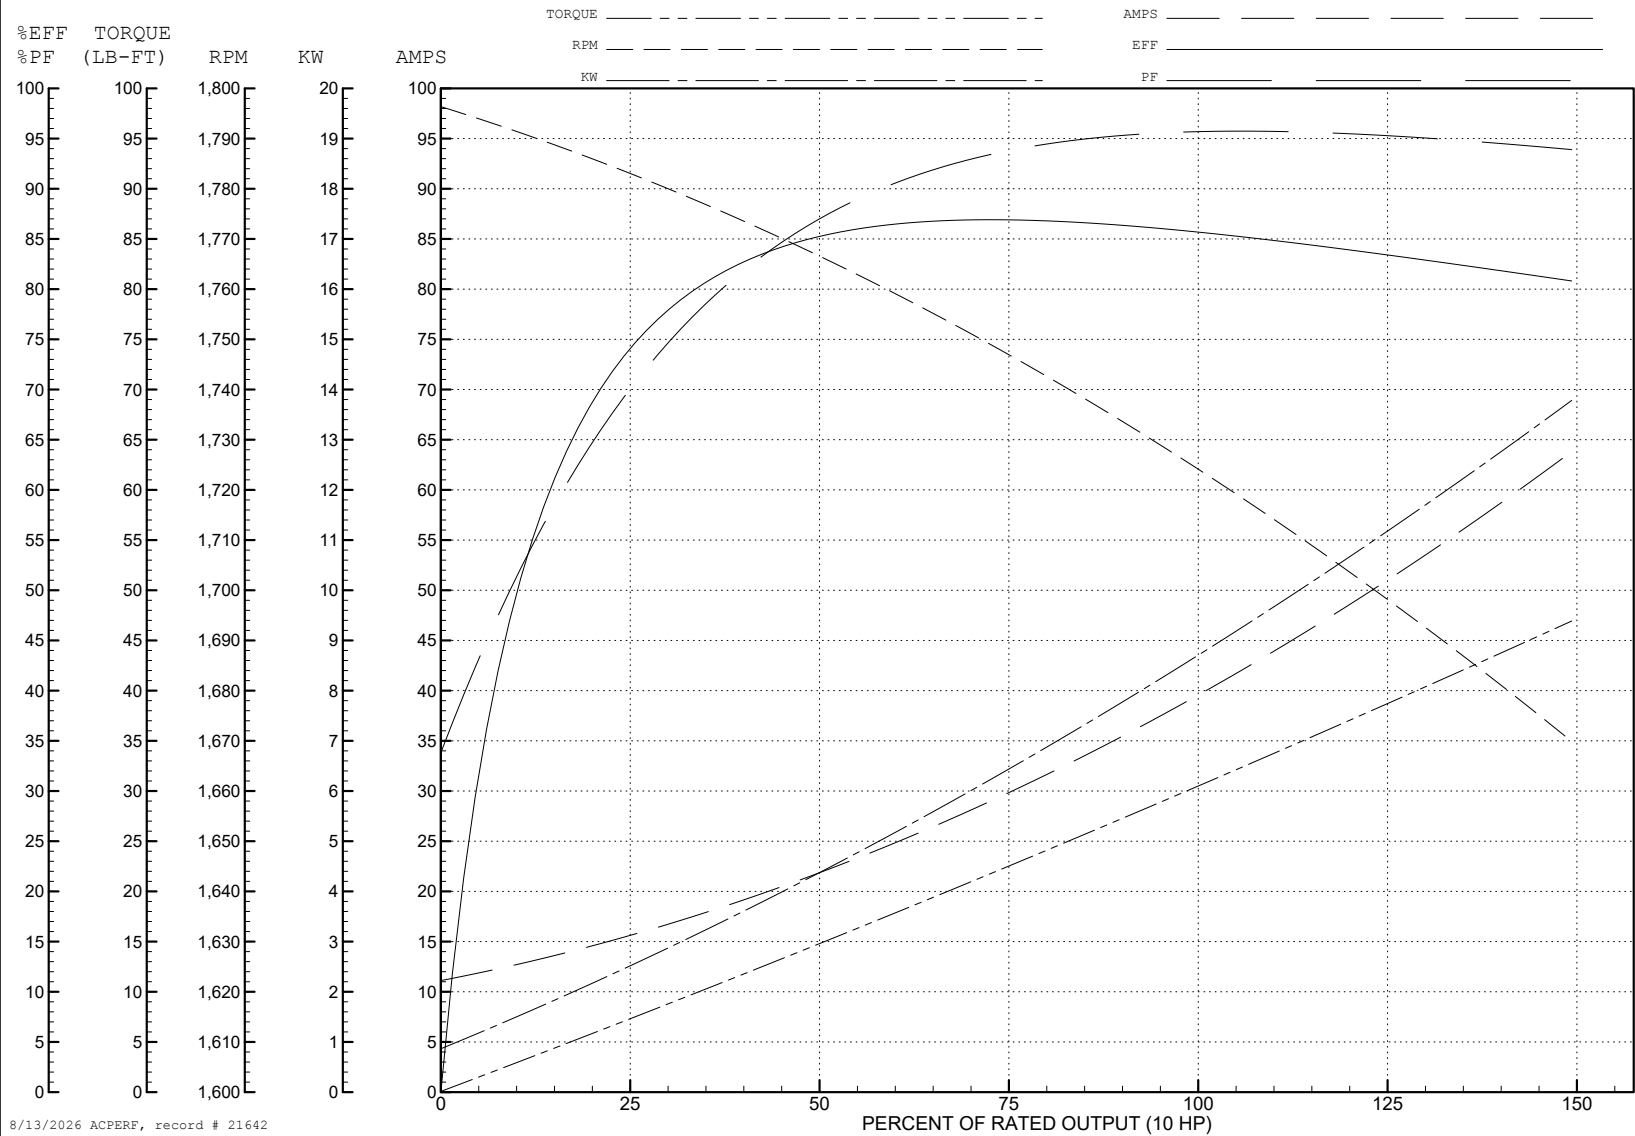

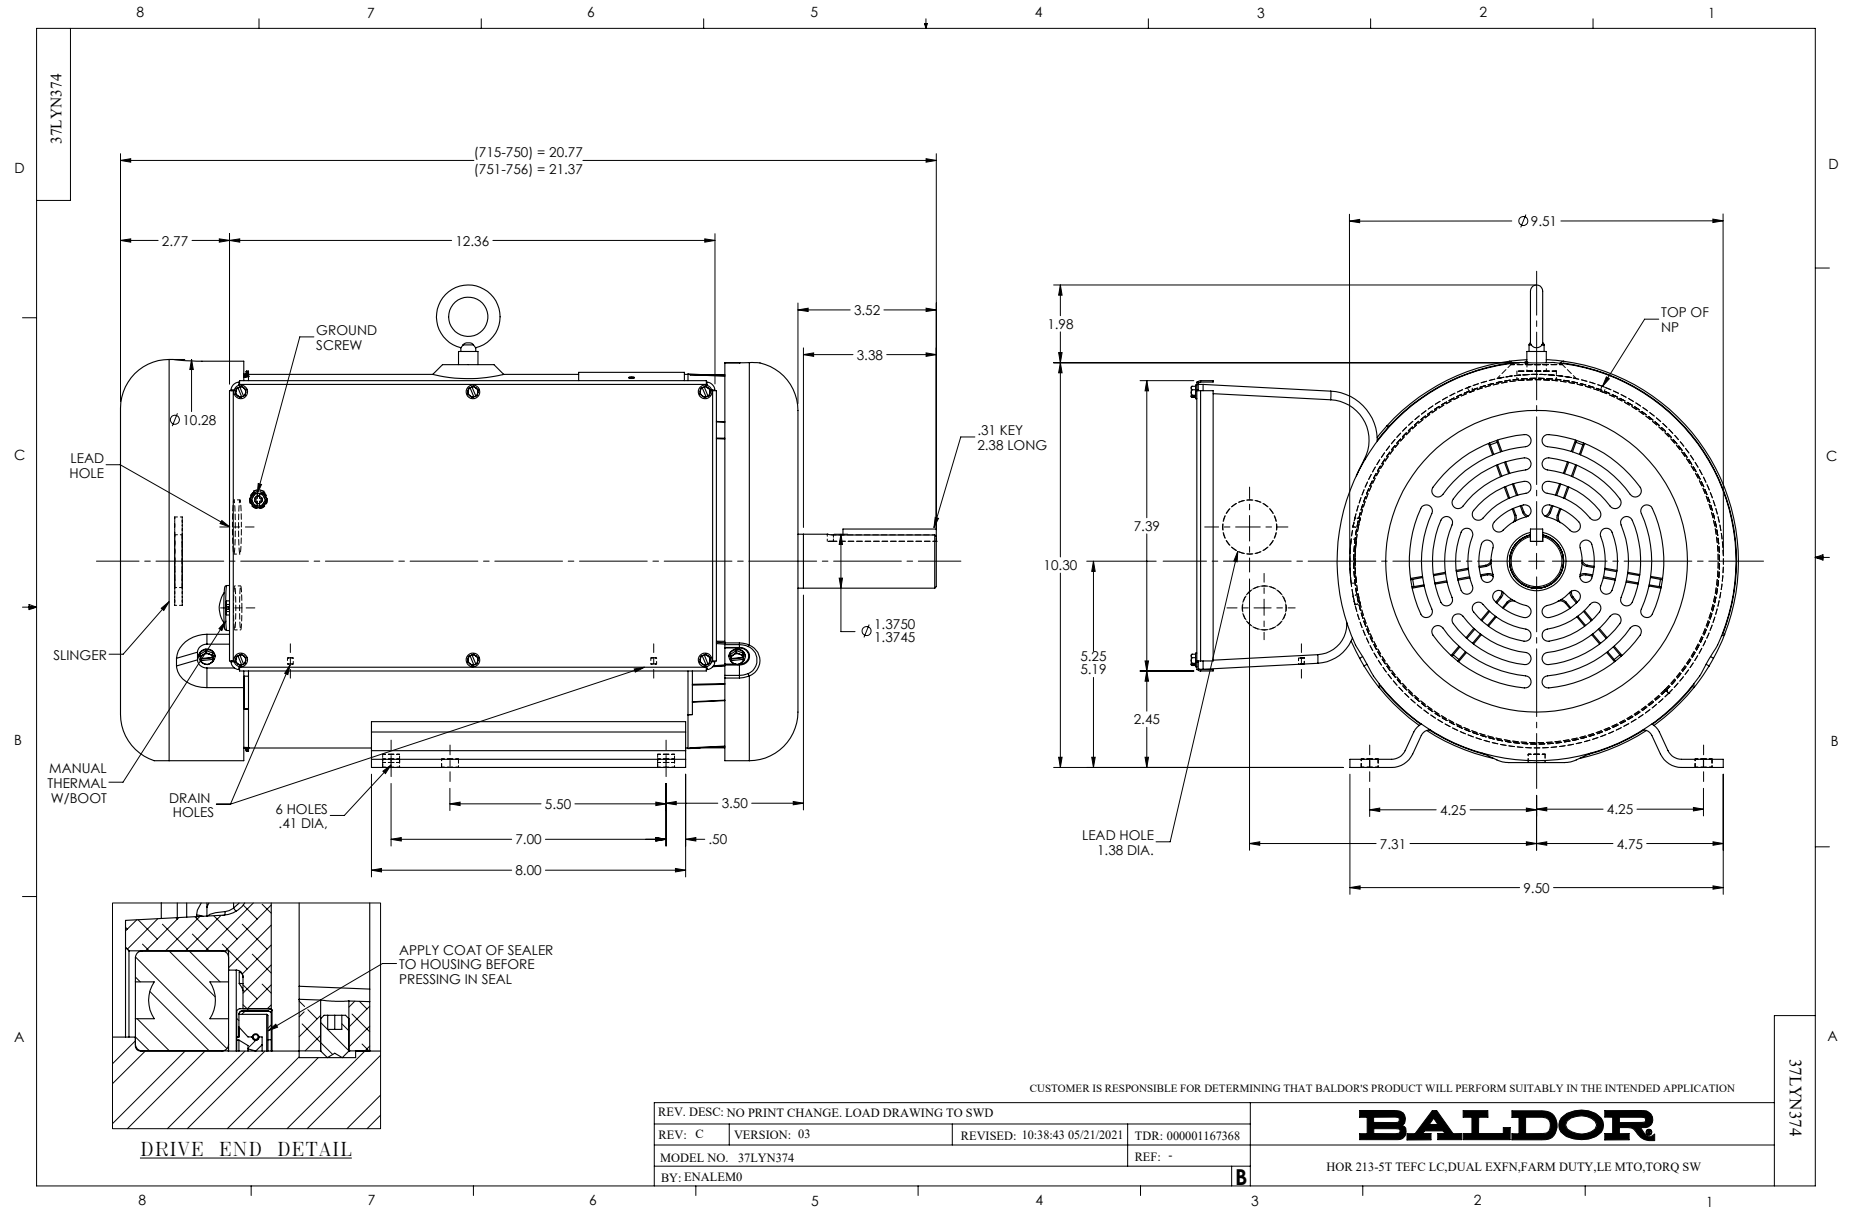

36FN3004

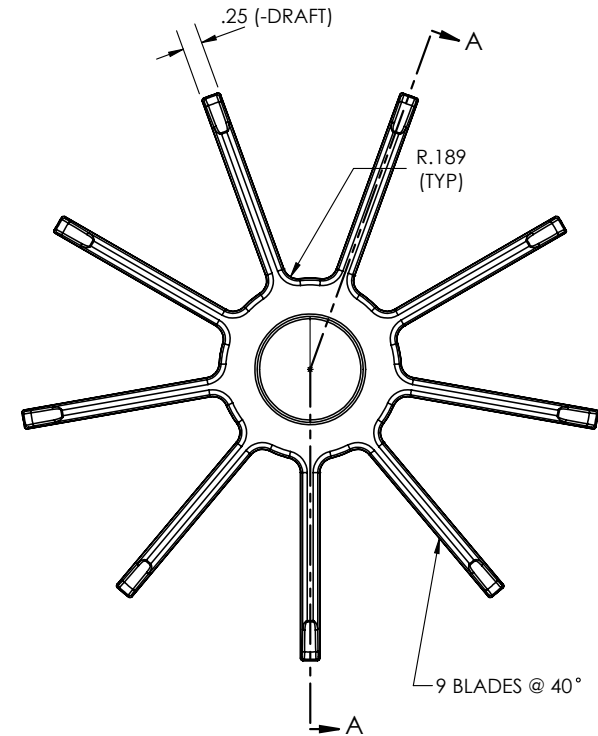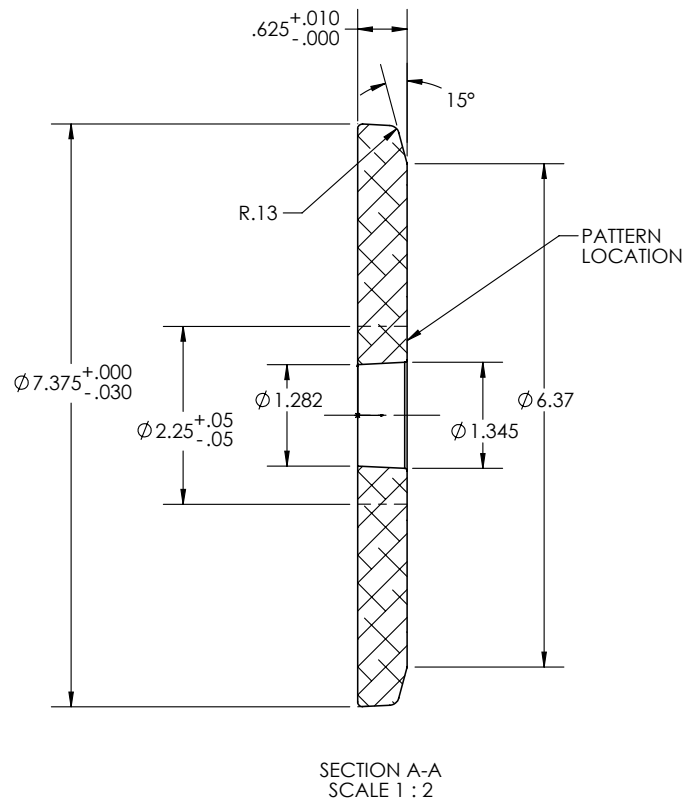
**DIE CAST ALUMINUM TOLERANCES
UNLESS OTHERWISE SPECIFIED**

2 PLCS	0-1"	$\pm .010$	FLASH GROWTH ALLOWANCE .015"
3 PLCS	0-1"	$\pm .004$	

 ABOVE 1" $\pm .001$ /INCH | ANGLES $\pm 0.5^\circ$
UNSPECIFIED FEATURE DIMENSIONS:

 RADII $\pm .03$ -.06 | DRAFT ANGLES = 2.88°

WEIGHT = 9 OZ.

REV. DESC: INCREASE RADIUS AROUND HUB AREA

REV: B	VERSION: 02	REVISED: 02:56:33 05/10/2017	TDR: 000001027912
--------	-------------	------------------------------	-------------------

36FN3004

MODEL NO. 36FN3004

REF: -

BY: USFRHAR


Material: - DIE CAST ALUMINUM

BALDOR

FAN EXTERNAL 36 FRAME - EXPLOSION PROOF DIE CAST

36FN3004

CD0152

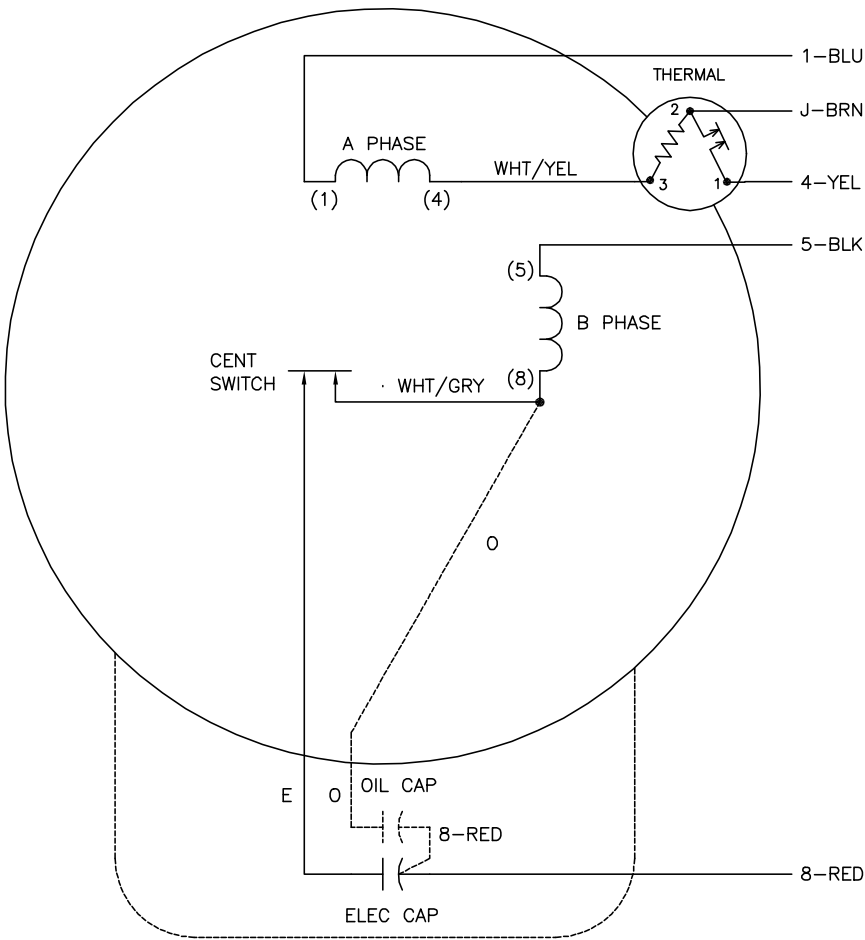

	LINE A	LINE B	JOIN
STD	1,8	4	J,5
OPP	1,5	4	J,8

- NOTES:
1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
 2. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
 3. OPTIONAL OIL CAPACITOR IS PROVIDED WHEN SPECIFIED.
 4. CAPACITORS MAY BE SEPERATELY MOUNTED.
 5. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REMOVE OPTIONAL THERMAL CONNECTION		
REV. LTR: D	VERSION: 01	TDR: 000000373039
CD0152	FILE: \AAA\00026\903	REVISED: 11:23:45 08/11/2005
	MTL: -	BY: ENJOEPO

BALDOR ELECTRIC Co.

TYPE L OR LC, SV, REV, 5 LDS, THERM, CAPS MAY BE SEP MTD

CD0152