Customer information packet

FSWDM3611T-E

3HP, 1760RPM, 3PH, 60HZ, 182T, 3636M, TEFC, F1
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/3/2026 3:36:53 AM

Specifications

Enclosure	TEFC
Frame	182T
Frame Material	Stainless Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	3.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
	460.0 V @ 60 HZ
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	4.200 A @ 460.0 V
	8.400 A @ 230.0 V
	8.800 A @ 208.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	4.2 a
Insulation Class	H

Part Detail

Revision	P
Type	AC
Mech. spec.	36R625
Base	
Status	PRD/A
Elec. spec.	36WGS987
Layout	36LYR625
Eff. date	08-11-2026
CD Diagram	CD0005
Poles	04
Leads	9#16
Proprietary	False
Created date	01-09-2018

Inverter Code	Inverter Ready
KVA Code	K
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3636M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	18.89 IN
Power Factor	76
Product Family	WD All SS Encapsulated
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1760 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP4427AAA01												
CAT #	FSWDM3611T-E				**WT**	86	**LBS**					
SPEC	36R625S987G1				**ENCL**	TEFC						
SER #					**CC**	010A	**IP**	69				
HP	3			**MAG CUR**	4.5/2.25							
VOLTS	230/460						**NEMA NOM. EFF**	89.5				
AMPS	8.4/4.2						**PF**	76				
RATING	40C AMB-CONT											
RPM	1760				**MAX RPM**	2700						
FRAME	182T	**HZ**	60		**CODE**	K	**CLASS**	H				
SER.F.	1.15	**SF AMP**	9.4/4.7				**PH**	3	**DES**	B		
DE	6206			**ODE**	6206							
LUBRICATION	POLYREX EM											
ID LOGO		**INVERTER TYPE**		**VPWM**		**CHP**	60	**TO**	90	1.5:1		
ID LOGO	**WK2**	0.372	**CT**	15	**TO**	60	4:1					
ID LOGO	**SL HZ**	1.3	**VT**	0-	**TO**	60	1000:1					
							QR					
YR												

Parts List

Part number	Description	Quantity
SA350543	SA 36R625S987G1	1.000 ea
RA339200	RA 36R625S987G1	1.000 ea
36FN3000C01SP	EXFN, PLASTIC, 5.25 OD, .912 ID	1.000 ea
35CB1017A02	5/36 MID SECT - 3 PC. CONDUIT BOX 3/4 N	1.000 ea
RM1070A81	O-RING, -043 VITON/FKM .070CS X 3.489ID	1.000 ea
HA3424S48	STUD - M6X1.0 THDS X 3.00"	1.000 ea
11XW1032G08	10-32 X .50, TAPTITE II, HEX WSHR SLTD U	1.000 ea
HW3001B01	BRASS CUP WASHER, FOR #10 SCREW	1.000 ea
36EP1920A02	FREP TEFC 206 BRG WD11/12 (STAINLESS)	1.000 ea
RM1070A42	O-RING,(#70-7.239) FLOUROELASTOMER COMPO	1.000 ea
HW4600G02	30 X 47 X 8 LIP SEAL, GRAPHITE INFUSED V	1.000 ea
HW4600F25	30 X 48 X 4.5 AFX SEAL, GRAPHITE INFUSED	1.000 ea
HW4500S33	1/8 NPT STAINLESS #304 SS PLUG	4.000 ea
HW4500S33	1/8 NPT STAINLESS #304 SS PLUG	4.000 ea
HW5100A06	W2420-025 WVY WSHR (WB)	1.000 ea
RM1006A03	GROMMET, #2867 1.12 HOLE (ATLANTIC INDIA	1.000 ea
36EP1920A04	PUEP TEFC 206 BRG WD11/12 (STAINLESS)	1.000 ea
RM1070A42	O-RING,(#70-7.239) FLOUROELASTOMER COMPO	1.000 ea
HW4600G02	30 X 47 X 8 LIP SEAL, GRAPHITE INFUSED V	1.000 ea
HW4600F25	30 X 48 X 4.5 AFX SEAL, GRAPHITE INFUSED	1.000 ea
RM1070A14	O-RING, -010 VITON/FKM .070CS X .239ID	4.000 ea
11XB1214S16	12-14X1.00 HXWSSLD TYP B STAINLESS	1.000 ea
36FH4007	FAN COVER #304 STAINLESS W/OUT GREASER	1.000 ea
10XN1032FS06	HEX HD CAP SCREW 10-32 X 3/8 SS FOOD SAF	3.000 ea
35CB1513A01	35-36-37 MACH. LID - 3 PC. CONDUIT BOX	1.000 ea
RM1070A81	O-RING, -043 VITON/FKM .070CS X 3.489ID	1.000 ea
HW2502E16	#303 SS,SQ KEY 1/4 X 1.750	1.000 ea
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 ea
MJ5001A27	32220KN GRAY SEALER *MIN BUY 4 QTS=1GAL	0.005 qt
MJ5004A93	FOOD GRADE (H1 RATED) ANTISEIZE THRD COM	0.005 ea
HA1025A21	WSHR,FELT .125" THK	1.000 ea

HA5027A09	DRAIN KIT,(2)HA4002A03 BAGGED W/LABEL	1.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
WD5603A01	KIT, CLOSED-END LEAD SPLICE (18-14GA)	1.000 ea
HA3101FS55	THRUBOLT, 1/4-20 X 13.250 SS FOOD SAFE	4.000 ea
G0PA1000	PKG GRP, PRINT PK1026A06	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
FE-0000016	ZTRG FE ASSEMBLY	1.000 ea
PE-0000010	ZRTG PE ASSEMBLY	1.000 ea


AC Induction Motor Performance Data
Record # 39149
Typical performance - not guaranteed values


Winding: 36WGS987-R001	**Type:** 3636M	**Enclosure:** TEFC

Nameplate Data				**460 V, 60 Hz: Single Voltage Motor**	
Rated Output (HP)			3	**Full Load Torque**	9.04 LB-FT
Volts			230/460	**Start Configuration**	direct on line
Full Load Amps			8.4/4.2	**Breakdown Torque**	34.81 LB-FT
R.P.M.			1760	**Pull-up Torque**	18.62 LB-FT
Hz	60	**Phase**	3	**Locked-rotor Torque**	21.9 LB-FT
NEMA Design Code	B	**KVA Code**	K	**Starting Current**	34.1 A
Service Factor (S.F.)			1.15	**No-load Current**	2.25 A
NEMA Nom. Eff.	89.5	**Power Factor**	76	**Line-line Res. @ 25ºC**	3.58 Ω
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	62°C
S.F. Amps				**Temp. Rise @ S.F. Load**	74°C
				Locked-rotor Power Factor	41
				Rotor inertia	0.335 LB-FT2


Load Characteristics 460 V, 60 Hz, 3 HP


% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	36	57	69	76	80	83	78
Efficiency	82	88	89.6	89.8	89.2	88.3	89.3
Speed	1790	1781	1772	1762	1751	1738	1755
Line amperes	2.45	2.86	3.46	4.17	4.95	5.83	4.65

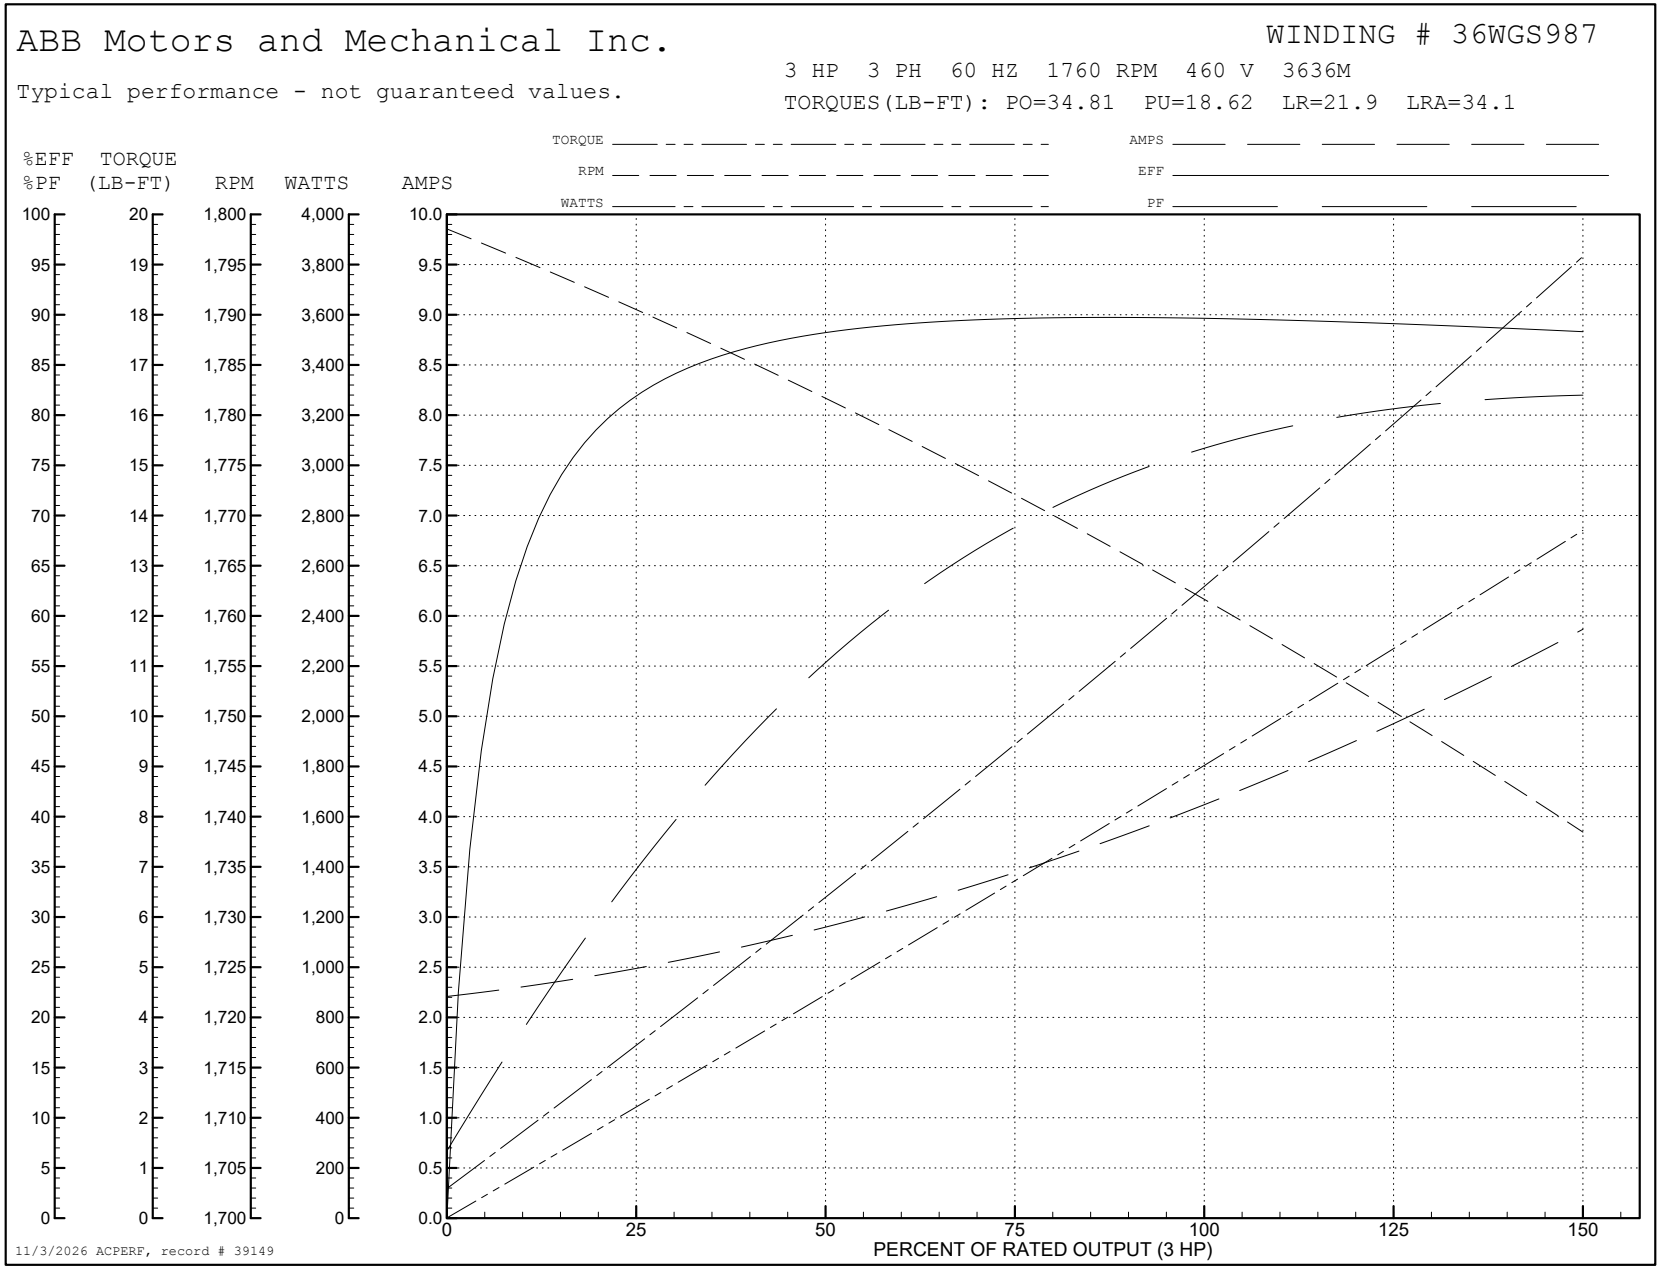
ABB Motors and Mechanical Inc.
WINDING # 36WGS987
Typical performance - not guaranteed values.
3 HP 3 PH 60 HZ 1760 RPM 460 V 3636M
TORQUES(LB-FT): PO=34.81 PU=18.62 LR=21.9 LRA=34.1
TORQUE
RPM
WATTS
AMPS
EFF
PF
%EFF %PF
TORQUE (LB-FT)
RPM
WATTS
AMPS
PERCENT OF RATED OUTPUT (3 HP)
11/3/2026 ACPERF, record # 39149

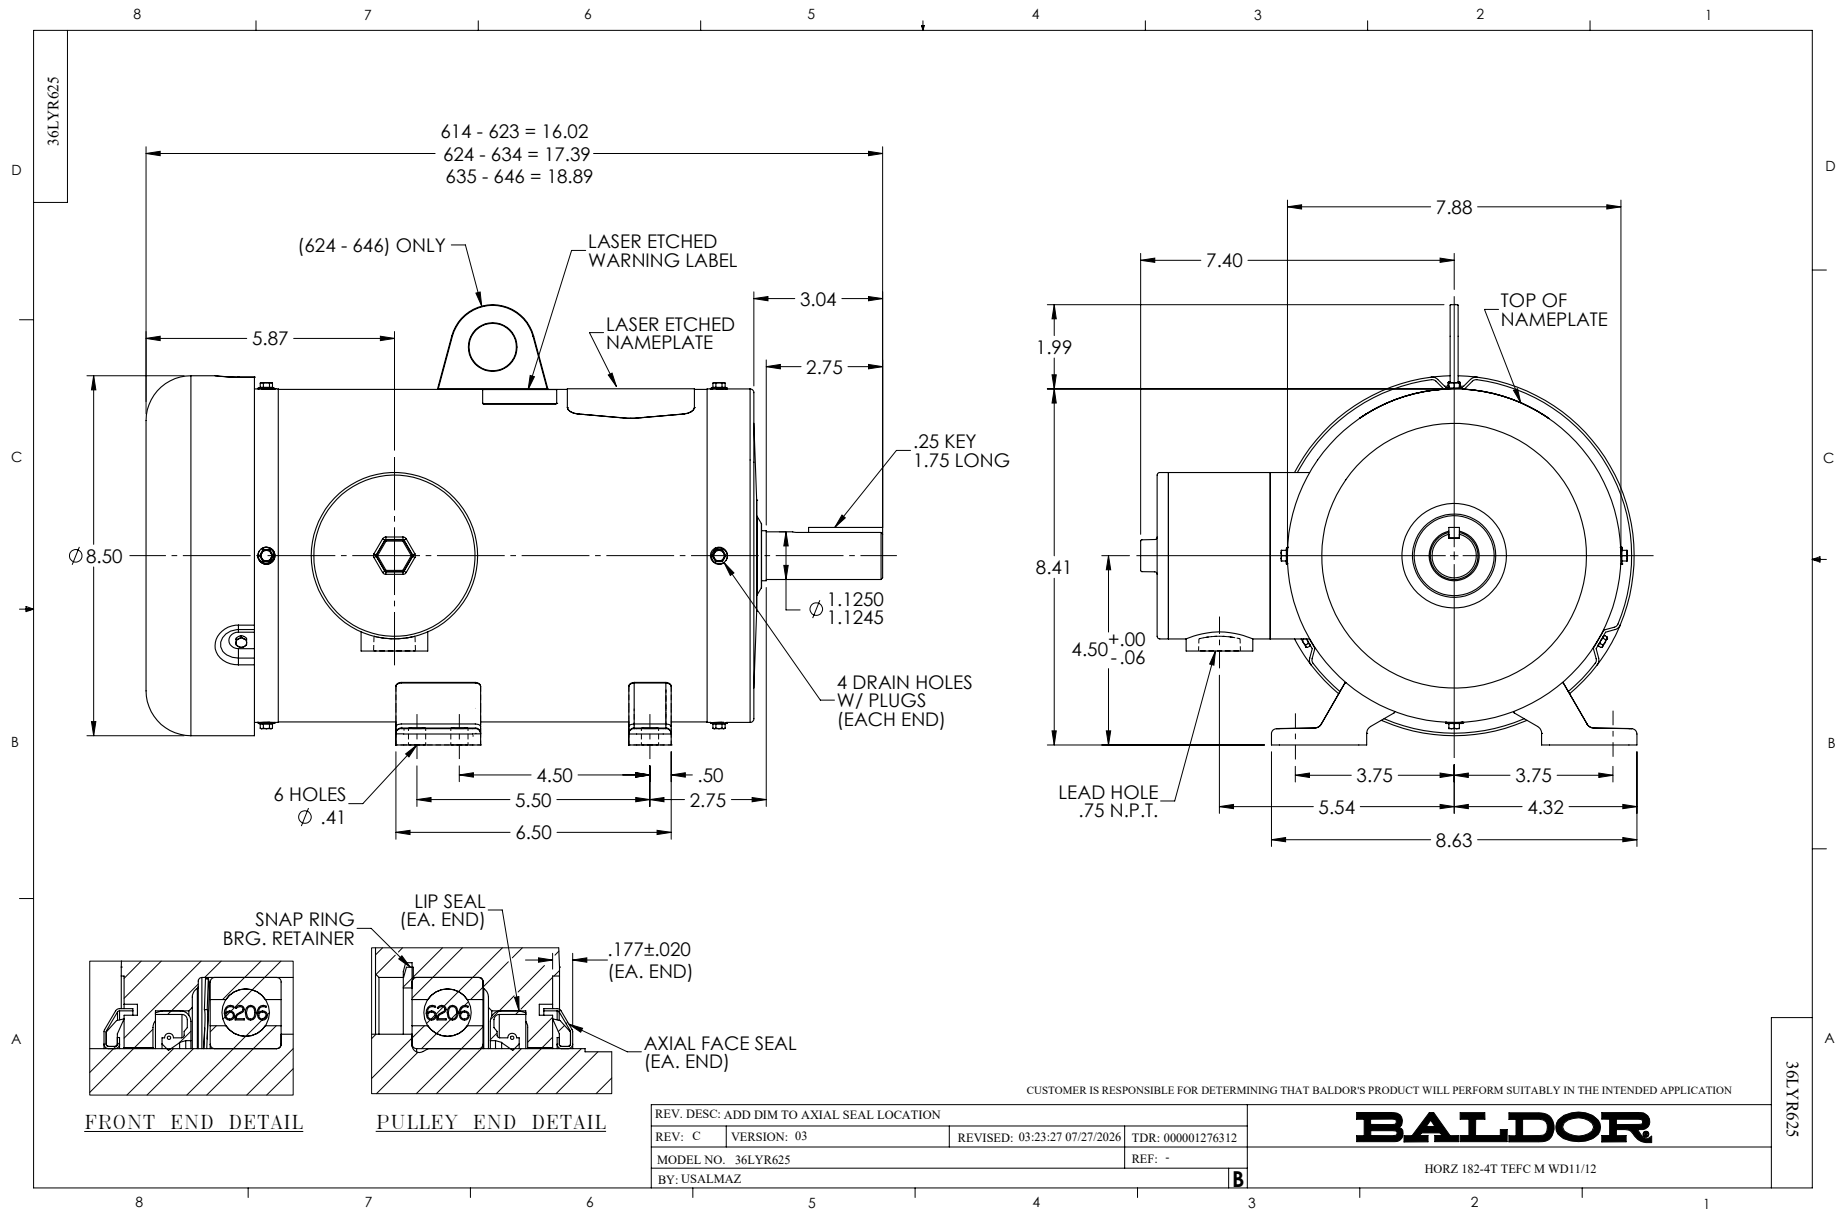
36LYR625
614 - 623 = 16.02
624 - 634 = 17.39
635 - 646 = 18.89
(624 - 646) ONLY
LASER ETCHED WARNING LABEL
LASER ETCHED NAMEPLATE
3.04
2.75
5.87
.25 KEY 1.75 LONG
∅8.50
∅ 1.1250 1.1245
4 DRAIN HOLES W/ PLUGS (EACH END)
6 HOLES ∅ .41
4.50
.50
5.50
2.75
6.50
7.88
7.40
TOP OF NAMEPLATE
1.99
8.41
4.50 +.00 -.06
LEAD HOLE .75 N.P.T.
3.75
3.75
5.54
4.32
8.63
SNAP RING BRG. RETAINER
LIP SEAL (EA. END)
.177±.020 (EA. END)
AXIAL FACE SEAL (EA. END)
6206
6206
FRONT END DETAIL
PULLEY END DETAIL
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: ADD DIM TO AXIAL SEAL LOCATION
REV: C
VERSION: 03
REVISED: 03:23:27 07/27/2026
TDR: 000001276312
MODEL NO. 36LYR625
REF: -
BY: USALMAZ
B
BALDOR
HORZ 182-4T TEFC M WD11/12
36LYR625

CD0005

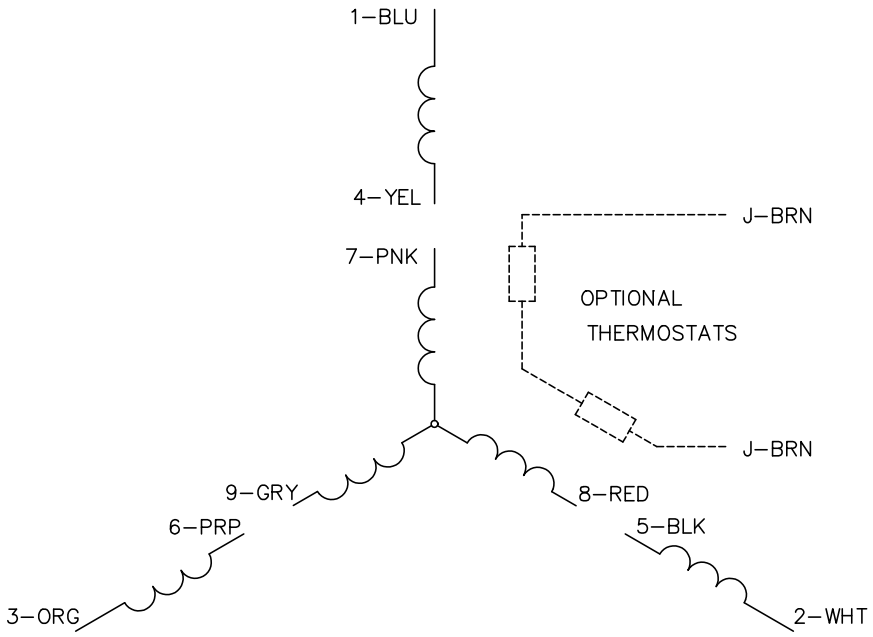

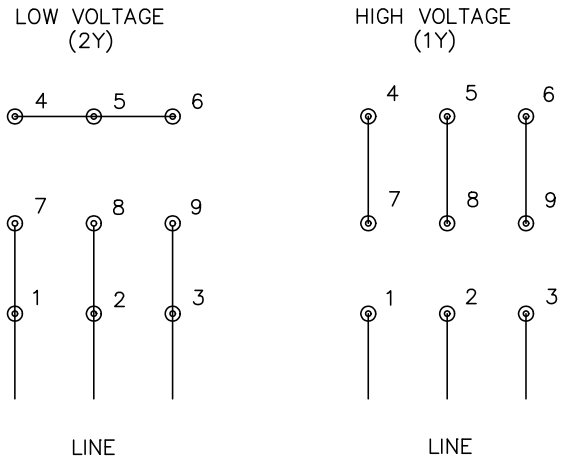

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
CD0005		FILE: AAA00005140	MDL: –
		MTL: –	3PH, DV, 9 LEADS