

ABB BALDOR RELIANCE III

Customer information packet

IDBRPM362004R1

200HP, 1785/3565RPM, 460V, 3PH, TEBC, FL3698

Specifications

Enclosure	TEBC
Frame	FL3698
Frame Material	Exposed Laminations
Frequency	60.00 Hz
Output @ Frequency	200.000 @ 60 HZ 200.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 460 V @ 60 HZ
Agency Approvals	CCSA US
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Current @ Voltage	234.000 A @ 460.0 V
Duty Rating	CONT
Feedback Device	NO FEEDBACK
Frame Prefix	FL
Heater Indicator	No Heater
High Voltage Full Load Amps	234.0 a
Insulation Class	H
Motor Standards	NEMA
Mounting Arrangement	F3
Overall Length	56.06 IN
Product Family	General Industrial
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Service Factor	1.00
Shaft Diameter	2.874 IN
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Speed	1785 rpm

Part Detail

Revision	G
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	L6189A
Layout	619678-001
Eff. date	05-03-2022
CD Diagram	422927-001
Poles	04
Leads	
Proprietary	False
Created date	04-09-2015

Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat

Nameplate

000613006MY									
	DUTY	HP	RPM	AMPS	VOLTS	HZ			
	CONT	200	1785		234	460		60	
	CONT	200	3600		225	460		121.2	
CAT.NO.	IDBRPM362004R1			SPEC. NO.	P36T1319				
SER.NO			FR	FL 3698	INSUL	H			
PH.	3	MAX SAFE SPEED		3750	AMB.	40	MIN. AMB.		-25
DESIGN NO.	L6189A		TYPE		ENCL.	TEAO-BC			
S.F.	1.00			D.E. BRG.	95BC02J30X				
ENCL MOD				O.D.E. BRG.	80BC03J30X				

Parts List

Part number	Description	Quantity
WS286630	WS P36T1319	1.000 ea
RA282838	RA P36T1319	1.000 ea
000692000NH	LABEL DIRECTION AIR FL	1.000 ea
000692000XM	LABEL QR CODE	1.000 ea
LB1613	LABEL, QR CODE, ADHESIVE LABEL	1.000 ea
418018122A	LABEL	2.000 ea
033775004EA	DRSCR #6-1/4 304 S.S.	4.000 ea
000613006MY	NP-RPMAC INVERTER DUTY	1.000 ea
422927001	C/D LABEL	1.000 ea
004824015A	GREASE POLYREX EM	0.900 lb
034690002AL	1/4 SQ.HD.PIPE PLUG	1.000 ea
034690002AL	1/4 SQ.HD.PIPE PLUG	1.000 ea
035000001A	ALFTG 1/8" 1610-BL	1.000 ea
035000001A	ALFTG 1/8" 1610-BL	1.000 ea
036100090KA	HSHCS BRACKET LE	4.000 ea
036100100KA	HSHCS BRACKET LE	4.000 ea
036140001E	EYEBOLT	2.000 ea
036500013AB	M16 X 2.0 HX NUT,ODE BRKT 304589	4.000 ea
BP5248	BP5248	2.000 ea
036500013AB	M16 X 2.0 HX NUT,ODE BRKT 304589	4.000 ea
418150003A	GREASE FITTING CAP	2.000 ea
419912001B	W WASHER	1.000 ea
036000016DB	HHCS	4.000 ea
HA4054	SHORT T-DRAIN FITTING, .125" N.P.T.	1.000 ea
HA4054	SHORT T-DRAIN FITTING, .125" N.P.T.	1.000 ea
609830005AAK	TBOLT	2.000 ea
609830005ADB	STUD,FRAME,FL320	2.000 ea
807585003AAA	BRKT,BE/DE,FL360,	1.000 ea
BP5068BJ01	BRUSH, .187 X .187 X 1.00	2.000 ea
807585004AAB	BRKT,FE/ODE,FL360,	1.000 ea
000613006NT	NAME PLATE IEC	1.000 ea

032018006CK	HHCS 3/8-16X3/4L PLATED 411409	4.000 ea
034017014AB	LCKW 3/8 STD. PLATED	4.000 ea
036000012JB	M8-1.25 X 12MM HXHDC	3.000 ea
036000012KB	M10 1.50 X 12MM HXHDCS	4.000 ea
036000020HD	HHCS M6X20MM LONG 304S.S	8.000 ea
036000016JB	HHCS M8-1.25X16MMPLTD-250	4.000 ea
036000016KB	HHCSM10-1.5X16MM PLTD-280	8.000 ea
036000020JD	HHCS M8X20MM LONG 304S.S	5.000 ea
036000025KB	HHCS,BRACE C/BOX M10X25 HXHDCS 304528	8.000 ea
036000025LB	HHCS M12-1.75X25 ZP 304538 036000025LA	4.000 ea
036150035RD	HSRSS 35MM M24 SS	2.000 ea
036600008AD	FLTWSHR,T BLK SPT	8.000 ea
036620010AB	M10 EXT. TOOTH LK WASHER	1.000 ea
034630001AJ	1/8" PIPE COUPLING	1.000 ea
417733036C	GASKT,C/BOX BACKPLATE,REF 706310063B	1.000 ea
406673002C	.75 CAP PLUG	1.000 ea
036000045JB	M8-1.25 X 45MM HXHCS	4.000 ea
410978010E	INLET FLGE	1.000 ea
410978019A	SCREEN, INLET FLANGE	1.000 ea
417733004J	GASKT	2.000 ea
417733013B	GASKT (REK P/N 189486)	1.000 ea
417733014C	GASKT (REK P/N 187215)	1.000 ea
418014004A	609185004cDPT/BOX	1.000 ea
418018074A	GROUND LABEL G100 METRIC 160 D.C.	1.000 ea
418057256C	HHCS M10 25MM 440 IEC	1.000 ea
610490001DG	2HP,3450//2890RPM,3PH,60//50HZ,56C,3532M	1.000 ea
611917002F	GASKT	1.000 ea
611965001A	WHEEL, BLOWER	1.000 ea
613439050A	ADAPT,C/BOX,FL360	1.000 ea
034530016AB	P/NIP 1/8X2 PLATED - 320	1.000 ea
706310058B	CBCVR(REK P/N 187296)	1.000 ea
706310389B	ENTRY PLATE 706310389AB	1.000 ea
706310063B	CBOX (REK)	1.000 ea
708528004B	BLOWER HOUSING	1.000 ea

804815053A	COVER,FAN,FL360	1.000 ea
804815055A	PLATE,BLWR,FL360	1.000 ea
804816051A	CVR,FAN,BRACE,FL400	4.000 ea
804816054A	GUARD,BLWR,FL400	2.000 ea
000640000P	TAG WINDING THERMOST	1.000 ea
004824007CQR	C2 PAINT SYSTEM MEDIUM GRAY CHARCOAL MET	0.300 ea
034180034JA	KEY 3/4X3/4X4-1/4 L	1.000 ea
415000003E	T/LUG #4AWG-1/0AWG W/HOLE FOR .375 BOLT	1.000 ea
LB1549	LABEL, BLANK 1.375 X 2.250 IMPRINTABLE	1.000 ea
004824007AB	PAINT,XT	0.100 ea

REL S.O.	-	VOLTS	460	ENCLOSURE	TEBC	WYE CONN EQ CKT OHMS PER PHASE		
FRAME	FL3698	AMPS	234	MAX SAFE RPM	3750	(AT BASE RATING, 25 °C)		
HP	200	DUTY	CONT	IM (AMPS)	92	R1	.0107	X1 .0887
BASE SPEED	1785	S.F.	1.0	P.F.@NL/FL	.037/.852	R2	.00771	X2 .111
PHASE/HERTZ	3/60	AMB °C/INSUL	40/H	WK ² (Lb-Ft ²)	35			XM 2.79

RATED FULL LOAD DATA

	RPM	HP	TORQUE LB-FT	FUND VOLTS	FREQ-HZ	AMPS
BASE SPEED	1784	200	589	460	60	234
MAX SPEED	3600	200	292	460	121.2	225
MIN SPEED	0	0	589	7.34	.5464	234

LOAD PERFORMANCE AT BASE SPEED

	RPM	HP	TORQUE LB-FT	FUND VOLTS	FREQ-HZ	AMPS
NO LOAD	1800	0	0	460	60	91.3
1/4	1796	50.1	146	460	60	109
1/2	1792	100	293	460	60	143
3/4	1788	150	441	460	60	186
FULL LOAD	1784	200	589	460	60	234
O/L	1764	396	1178	460	60	449

REMARKS: TYPICAL DATA
CORRELATED DATA




DR. BY K. GREEN
CK. BY B. GRANT
APP. BY J. MARTIN
DATE 06-11-14

**A-C MOTOR
PERFORMANCE DATA** L6189A
ISSUE DATE 5-2-17

REL S.O.	-	VOLTS	460	ENCLOSURE	TEBC	WYE CONN EQ CKT OHMS PER PHASE	
FRAME	FL3698	AMPS	234	MAX SAFE RPM	3750	(AT BASE RATING, 25 °C)	
HP	200	DUTY	CONT	IM (AMPS)	92	R1 .0107	X1 .0887
BASE SPEED	1785	S.F.	1.0	P.F. @NL/FL	.037/.852	R2 .00771	X2 .111
PHASE/HERTZ	3/60	AMB °C/INSUL	40/H	WK ² (Lb-Ft ²)	35	XM 2.79	

**CORRELATED DATA
VARIABLE SPEED AC MOTOR CURVES**

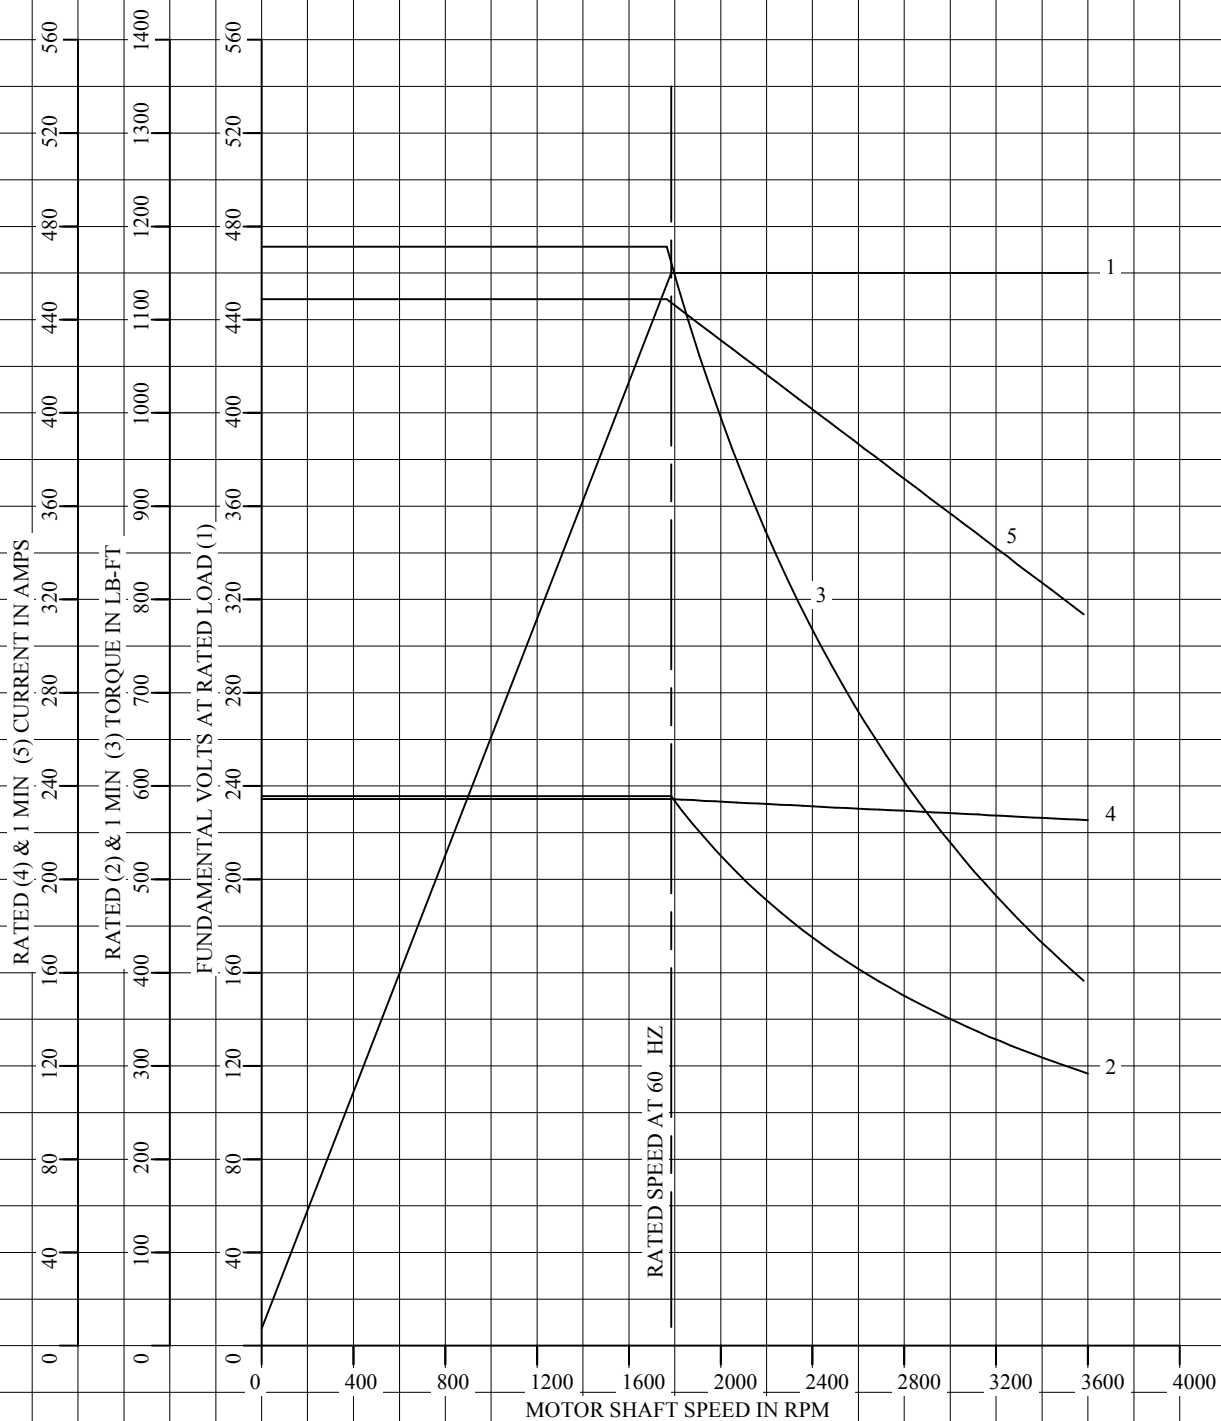

REMARKS: TYPICAL DATA
DATA VALID FOR NAMEPLATE SPEED RANGE ONLY

BALDOR
A MEMBER OF THE ABB GROUP


DR. BY K. GREEN
CK. BY B. GRANT
APP. BY J. MARTIN
DATE 06-11-14

**A-C MOTOR
PERFORMANCE
CURVES**

L6189A
SH 1 OF 2
ISSUE DATE 5-2-17 Page 9 of 12

REL S.O.	-	VOLTS	460	ENCLOSURE	TEBC	WYE CONN EQ CKT OHMS PER PHASE	
FRAME	FL3698	AMPS	234	MAX SAFE RPM	3750	(AT BASE RATING, 25 °C)	
HP	200	DUTY	CONT	IM (AMPS)	92	R1 .0107	X1 .0887
BASE SPEED	1785	S.F.	1.0	P.F. @NL/FL	.037/.852	R2 .00771	X2 .111
PHASE/HERTZ	3/60	AMB °C/INSUL	40/H	WK ² (Lb-Ft ²)	35	XM 2.79	

CORRELATED DATA
LOAD PERFORMANCE (CONSTANT V/HZ RANGE)

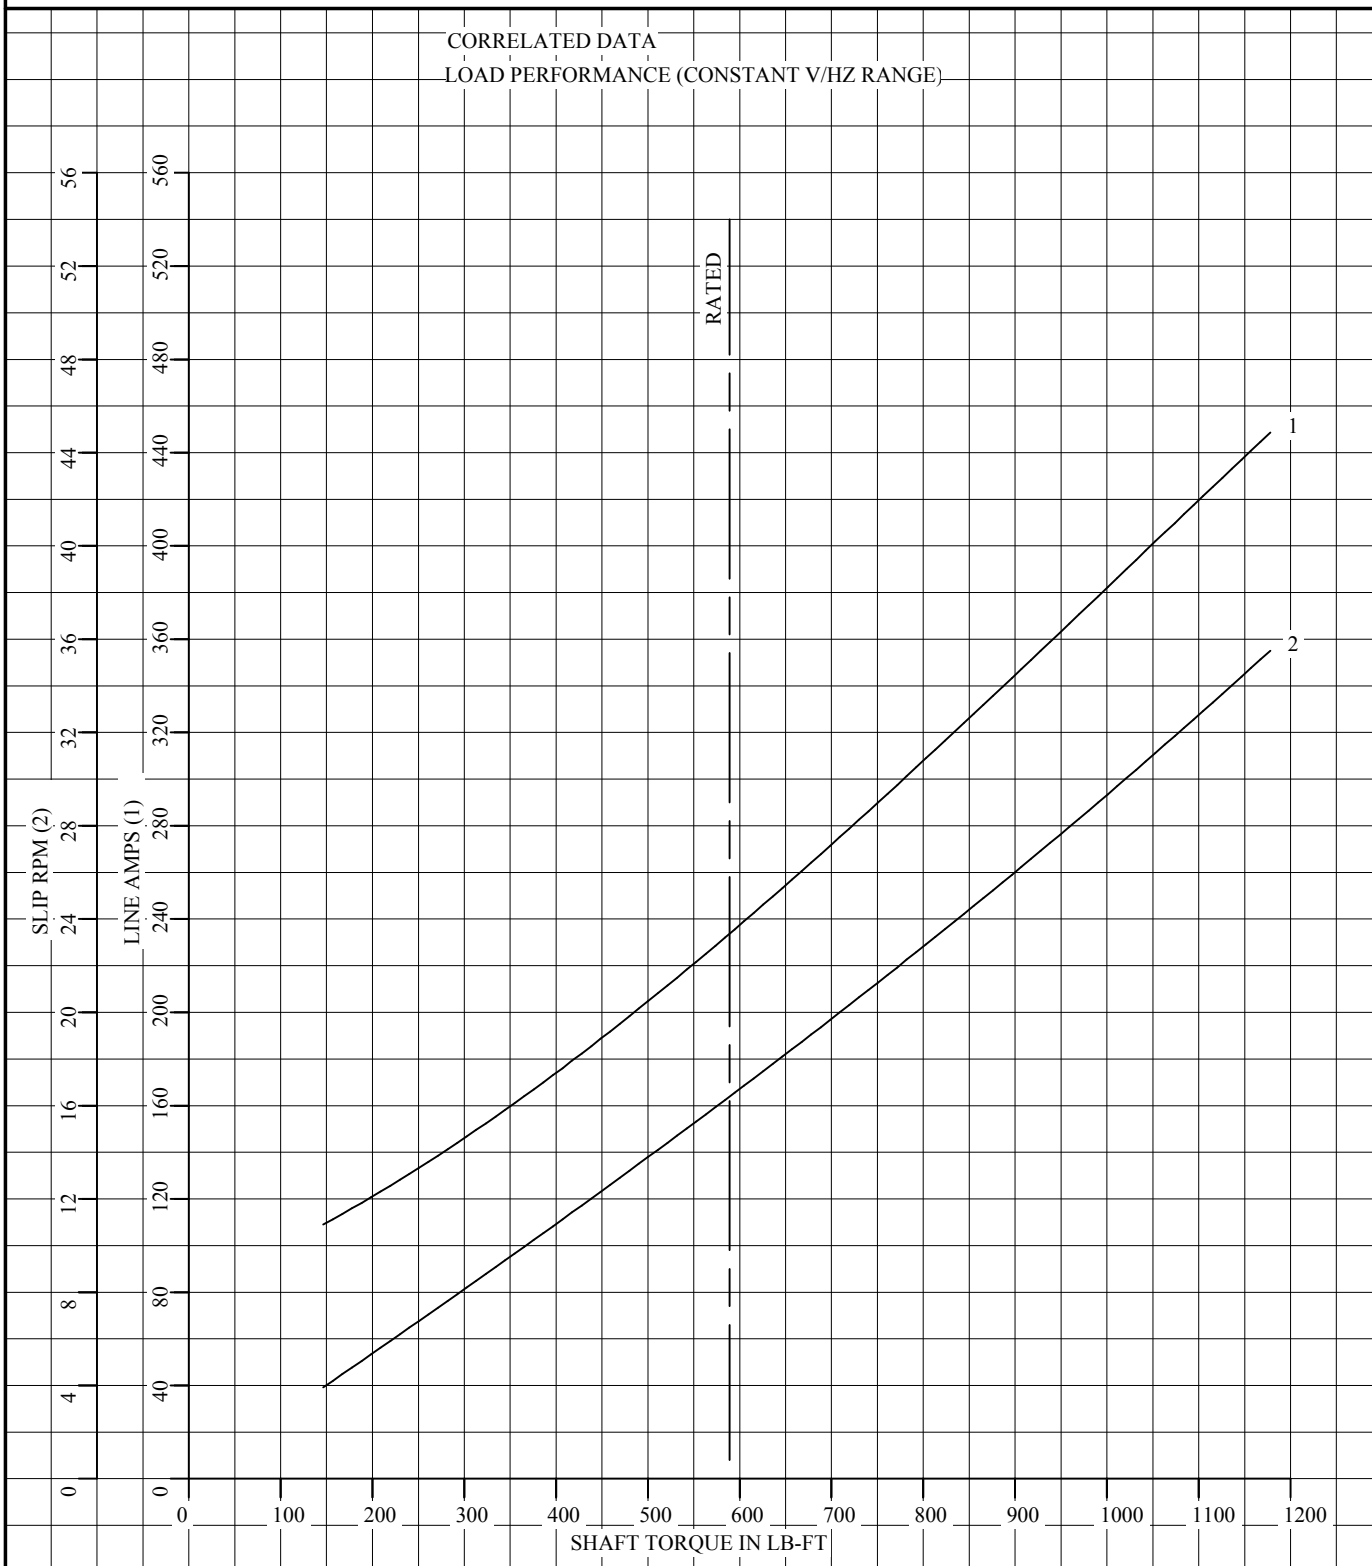


REMARKS: TYPICAL DATA
DATA VALID FOR NAMEPLATE SPEED RANGE ONLY

BALDOR
A MEMBER OF THE ABB GROUP


DR. BY K. GREEN
CK. BY B. GRANT
APP. BY J. MARTIN
DATE 06-11-14

**A-C MOTOR
PERFORMANCE
CURVES**

L6189A
SH 2 OF 2
ISSUE DATE 5-2-17 Page 10 of 12

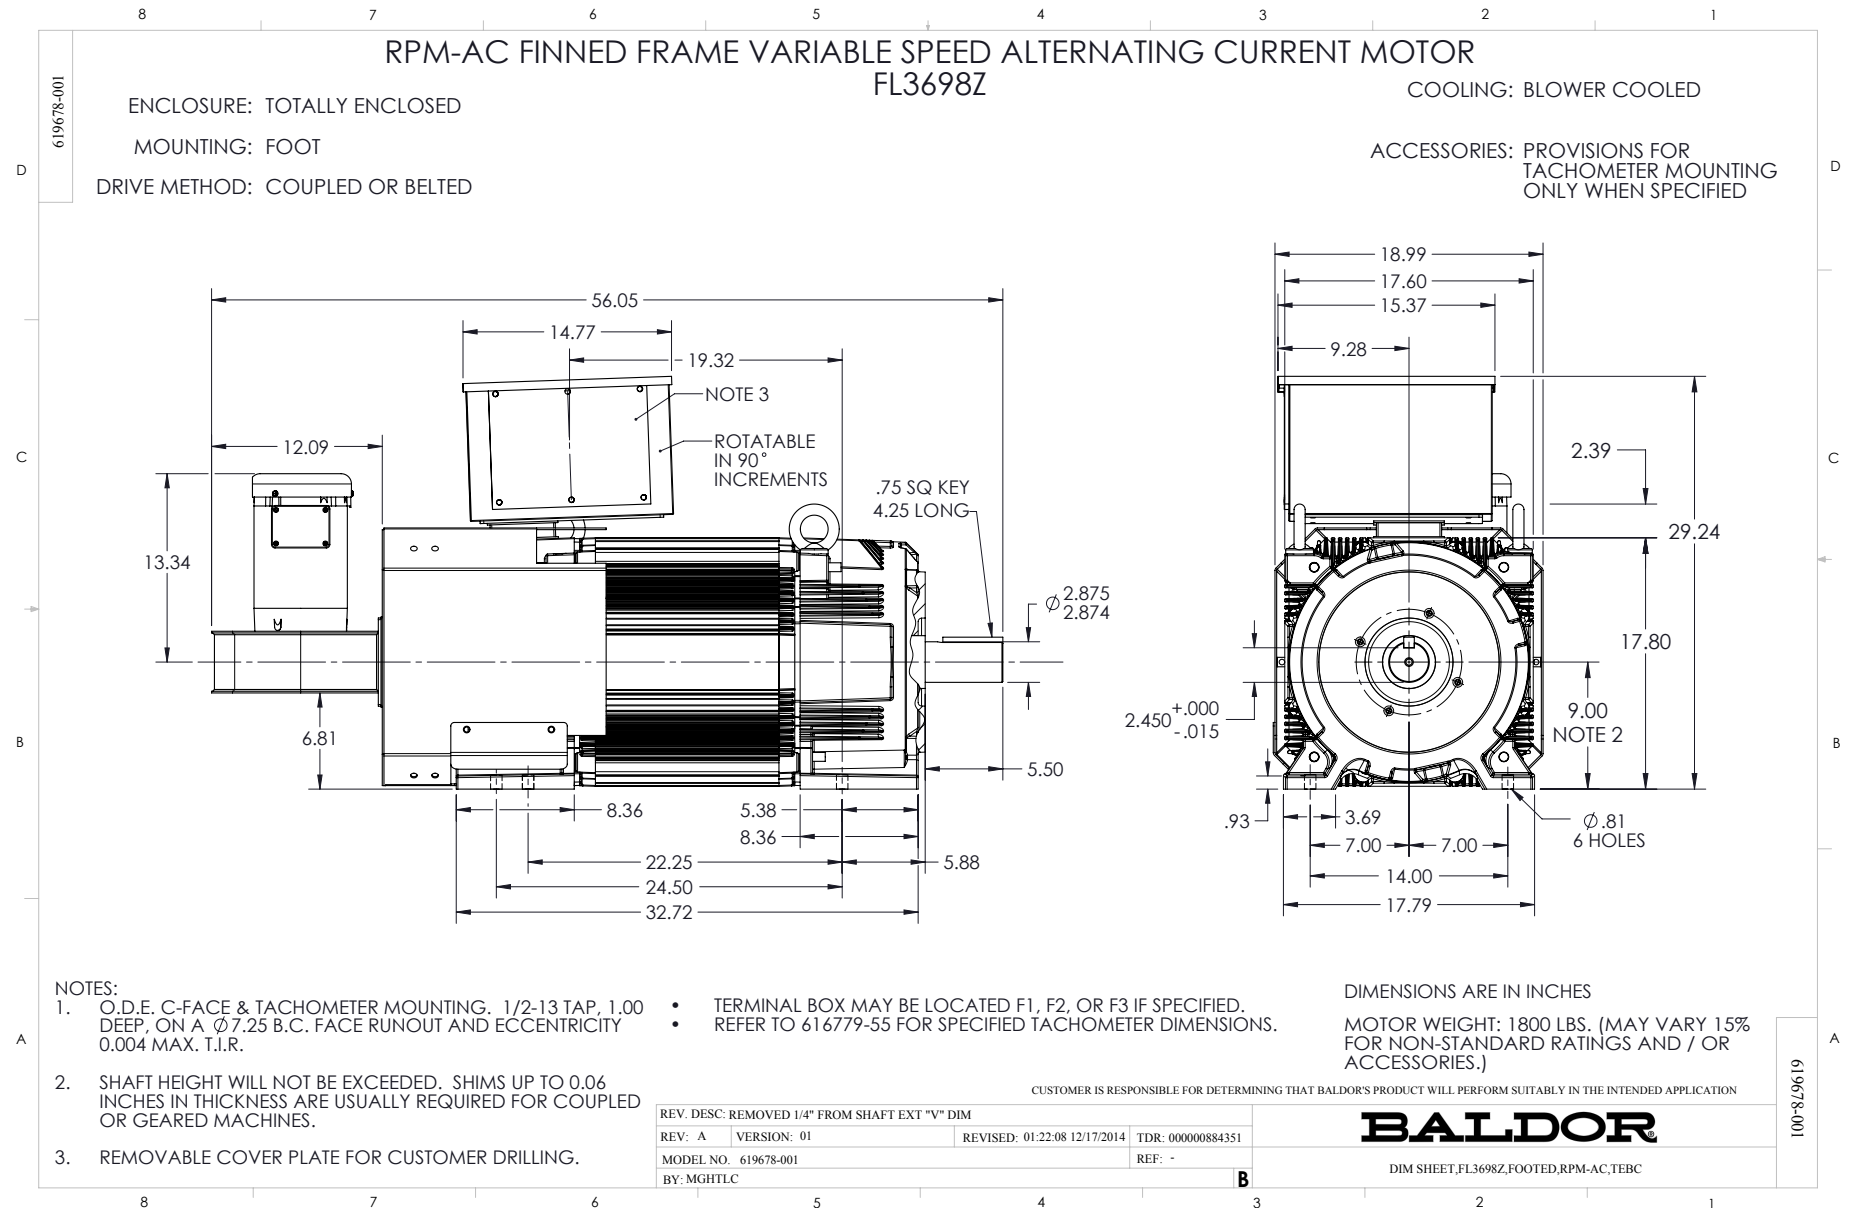

422927-001

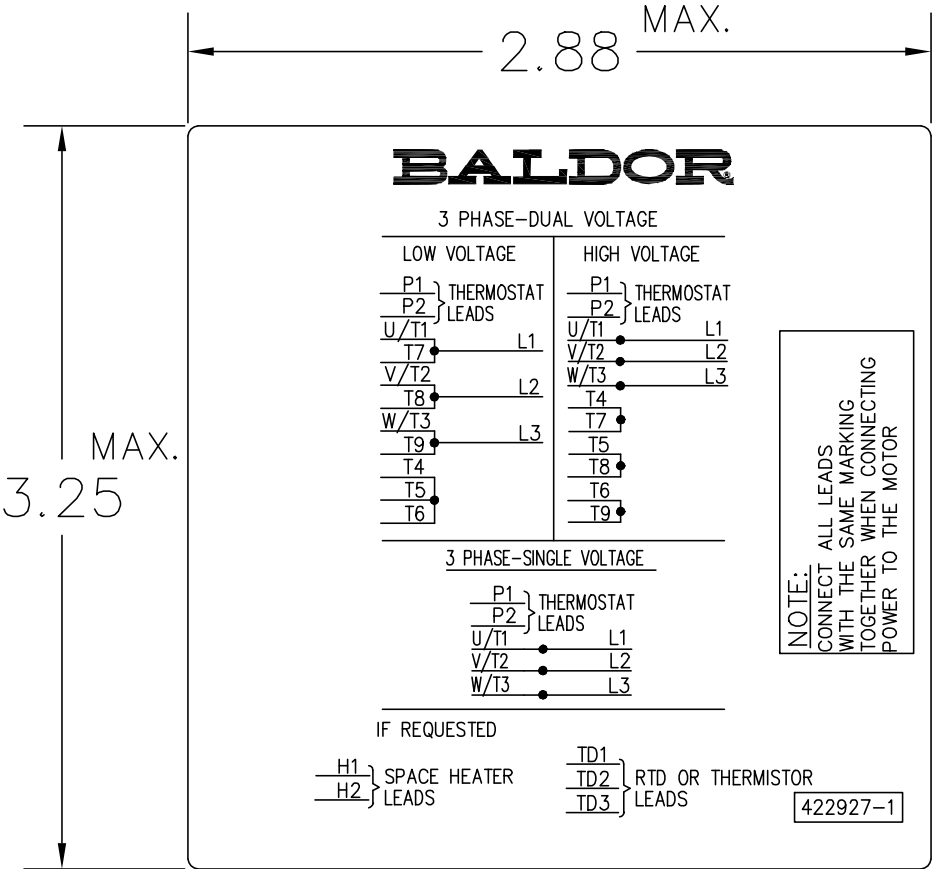

NOTE:
DATA TO BE SIZED
SO THAT IT FITS INTO
MATERIAL DECAL
DIMENSIONS. MAKE
LETTERS & NUMBERS
AS LARGE AS POSSIBLE.

MATERIAL: CERAMATIC DGF-P4
PERMA GRIP ADHESIVE

ALL LETTERS, NUMBERS
AND LINES TO BE BLACK
ON WHITE BACKGROUND.

422927-001

REV. DESC: CHANGE BACKGROUND COLOR FROM GOLD TO WHITE		
REV. LTR: B	VERSION: 02	TDR: 000000788708
FILE: \RGG\00000\203	REVISED: 08:09:29 03/04/2013	
MTL: -	BY: RGGWT	

BALDOR

EXTERNAL CONNECTION LABEL

SH 1 of 1