ABB BALDOR RELIANCE

Customer information packet

IDCSWDM3710T

7.5HP, 1770RPM, 3PH, 60HZ, 213TC, 3740M, TEFC
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/3/2026 1:35:01 AM

Specifications

Enclosure	TEFC
Frame	213TC
Frame Material	Stainless Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	7.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
	460.0 V @ 60 HZ
Agency Approvals	UR
	CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	19.000 A @ 230.0 V
	9.500 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.7 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	9.5 a

Part Detail

Revision	AB
Type	AC
Mech. spec.	37H885
Base	
Status	PRD/A
Elec. spec.	37WGT864
Layout	37LYH885
Eff. date	08-15-2022
CD Diagram	CD0005
Poles	04
Leads	9#14
Proprietary	False
Created date	10-25-2006

Insulation Class	H
Inverter Code	Inverter Duty
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	6000 rpm
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 14 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3740M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	19.81 IN
Power Factor	81
Product Family	Wash Down Paint Free
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.00
Shaft Diameter	1.375 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1770 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2	None

Nameplate

NP1608L									
CAT NO	IDCSWDM3710T								
SPEC.	37H885T864G1								
FRAME	213TC		**HP**	7.5 TE					
VOLTS	230/460								
MAG CUR	8.8/4.4			**FLA**	19/9.5				
RPM	1770			**RPM MAX**	6000				
HZ	60	**PH**	3		**CLASS**	H			
SER.F.	1.00	**DES**	A		**SL HZ**	1			
NEMA-NOM-EFF	91.7	**WK2**	0.98						
BLWR V		**PH**		**HZ**		**A**			
RATING	40C AMB-CONT								
DE BRG	6307		**ODE BRG**	6206					
CC	010A	**SN**							

Parts List

Part number	Description	Quantity
SA151215	SA 37H885T864G1	1.000 ea
RA140041	RA 37H885T864G1	1.000 ea
37FN3002B01	EXFN, PLASTIC, 7.50 OD, 1.155 ID	1.000 ea
HW3200S01	EYEBOLT 3/8-16 X3/4 S.S. TDR #35988	1.000 ea
37CB3000A40MU	K.O. BOX-MODEL 37 NEMA 213-5 .75 NPT LEA	1.000 ea
37GS1025	37 MOLDED GASKET W/LIP, LEAD SEAL	1.000 ea
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	2.000 ea
HA5027A04	HA4054 T-DRAIN X2 BAGGED	1.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
HW3001B01	BRASS CUP WASHER, FOR #10 SCREW	1.000 ea
37EP3101A49MU	FR EP 37 L & M TEFC (FOR S.P. #9D)	1.000 ea
HW4500S33	1/8 NPT STAINLESS #304 SS PLUG	3.000 ea
HW5100A06	W2420-025 WVY WSHR (WB)	1.000 ea
37EP3300A25MU	FACE MT EP-ENCL-307 BRG-213TC-215TC NO G	1.000 ea
HW4500S33	1/8 NPT STAINLESS #304 SS PLUG	3.000 ea
HW4606A04	JM CLIPPER/SEAL (LWE-1376-2125-AL45)	1.000 ea
10XN2520S30	1/4-20 X 1 7/8 HEX HEAD SS	4.000 ea
XY3118S12	5/16-18 HEX NUT, STAINLESS STEEL	4.000 ea
51XB1214A20	12-14X1.25 HXWSSLD SERTYB	1.000 ea
37FH4000A45	STAINLESS FAN COVER, NO GREASER SLOT (FO	1.000 ea
11XW1032S06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	3.000 ea
36CB4517	LIPPED CB LID #304 STAINLESS - CLEANED	1.000 ea
37GS3010SP	1/16"WHITE LID GASKET	1.000 ea
59XW0832S07	TAPTITE II,HEX WSHR UNSLTD SER,410 S.S.,	4.000 ea
HW4600B74	V-RING SLINGER 1.125 X 1.445 X .24 VITON	1.000 ea
HW2502F21	#303 SS,SQ KEY 5/16 X 2.375	1.000 ea
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 ea
MJ5001A02	732 CL SEALANT 3 OZ DIXIE BEARING 289100	0.001 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
LB1164	LABEL,WARNING AND DRAIN	1.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb

HA3104S17	THRUBOLT 13.250LG SS	4.000 ea
LC0145B01	CONNECTION LABEL	1.000 ea
NP1608L	SS WD INV UL CSA CC REV MTG	1.000 ea
37PA1074	PALLET PACK GRP, PRINT BOX PK1026A06	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea

BALDOR
A MEMBER OF THE ABB GROUP

AC Induction Motor Performance Data

Record # 37140
Typical performance - not guaranteed values

Winding: 37WGT864	**Type:** 3739M	**Enclosure:** TEFC


Nameplate Data				General Characteristics at 460 V, 60 Hz: High Volt Connection	
Rated Output (HP)	7.5			Full Load Torque	22.3 LB-FT
Volts	230/460			Start Configuration	DOL
Full Load Amps	19/9.5			Break Down Torque	71.3 LB-FT
R.P.M.	1770			Pull-Up Torque	38.7 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	46.5 LB-FT
NEMA Design Code	A	KVA Code	J	Starting Current	73 Amps
Service Factor	1			No-load Current	4.3 Amps
NEMA Nom. Eff.	91.7	P.F.	81	Line-line Res. @ 25°C.	1.34 Ohms
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	69°C
S.F. Amps				Temp. Rise @ S.F. Load	

Load Characteristics at 460 Volts, 60 Hz, 7.5 HP


% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	42	65	75	81	83	85	
Efficiency	86.9	91.1	92.1	91.7	90.8	89.7	
Speed	1793	1786	1778	1770	1760	1750	
Line Amperes	4.8	5.95	7.62	9.47	11.6	13.9	

Baldor Electric Company Fort Smith, Arkansas BALDOR • RELIANCE


Catalog	IDCSWDM3710T	NP VOLTS	230/460	ENCLOSURE	TEFC	WYE CONN EQ CKT OHMS PER PHASE (BASE RATING, 20C)	
FRAME	213TC	NP AMPS	19/9.5	Base Volts	460	R1 0.633	X1 2.477
HP	7.5 HP	DUTY	Cont	Base AMPS	9.47	R2 0.402	X2 1.907
BASE SPEED	1800	MAX SAFE RPM	6000	Slip Hz	1.00		XM 57.989
PHASE/HZ	3/60	AMB^{0}C/INSUL	40/H	WK^2 (lb-ft^2)	0.959		

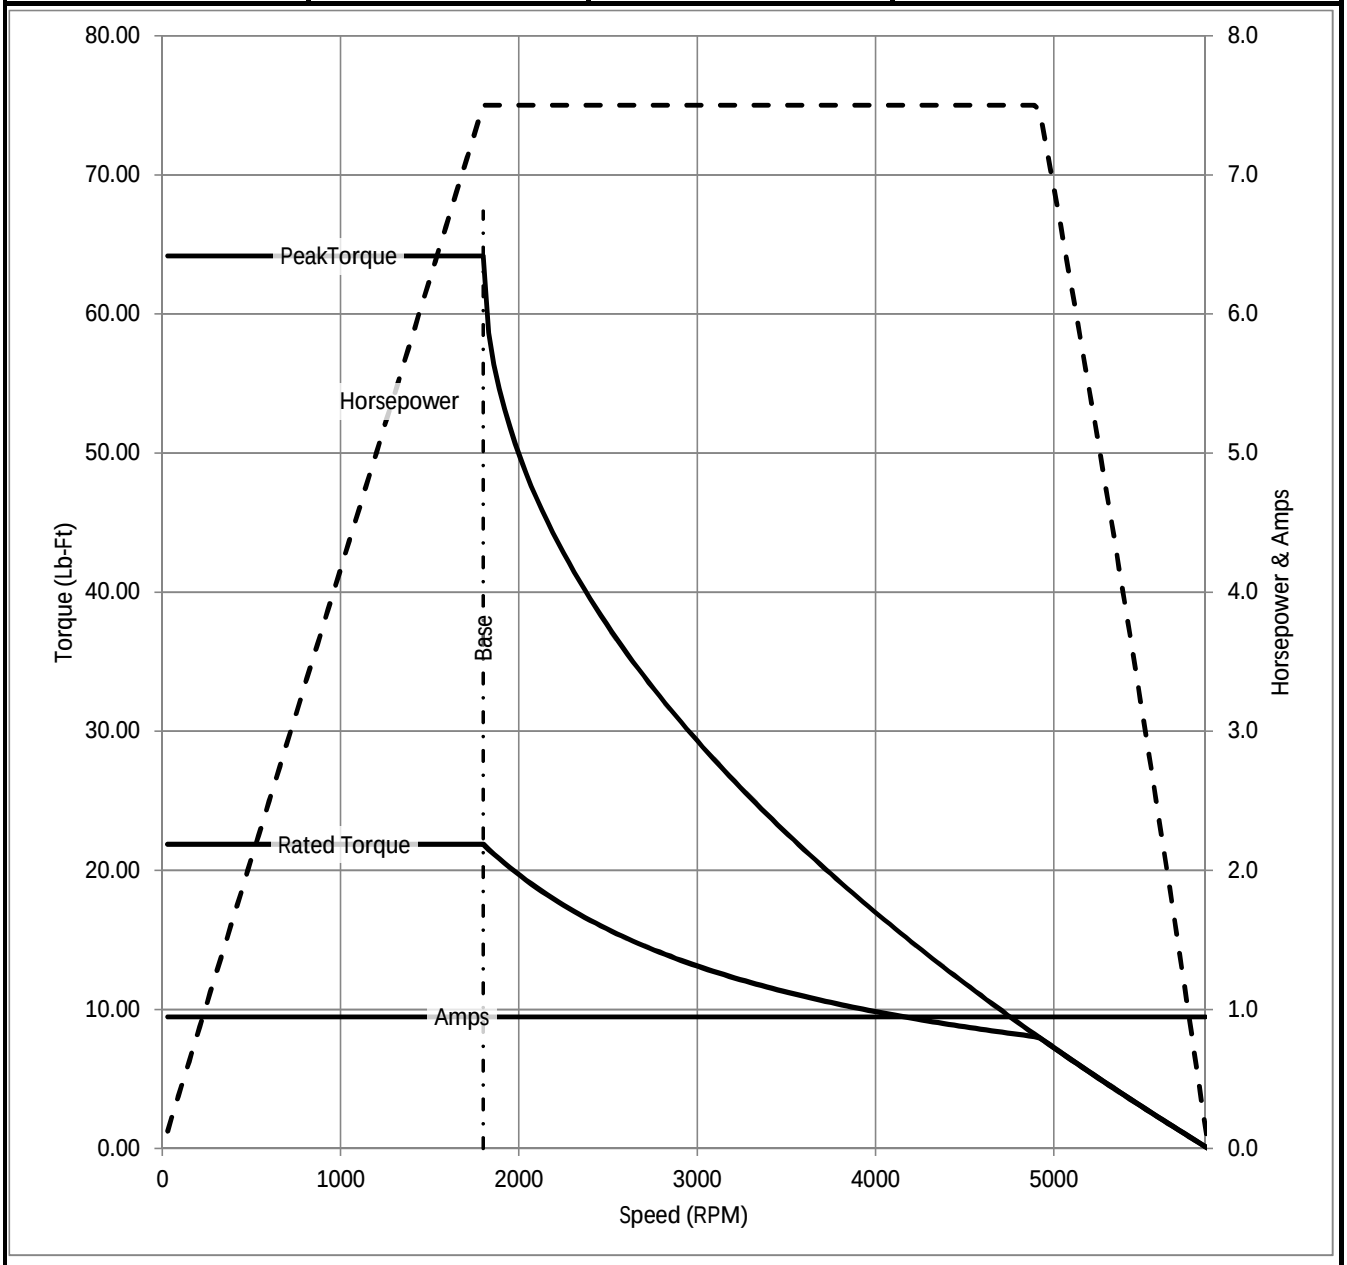


Remarks: Calculated Data

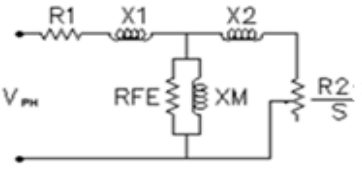


BALDOR A MEMBER OF THE ABB GROUP	DR BY ENR CK BY APP BY ENR DATE 3/6/2013	A-C MOTOR PERFORMANCE CURVES	37H885T864G1 ISSUE DATE 3/6/2013

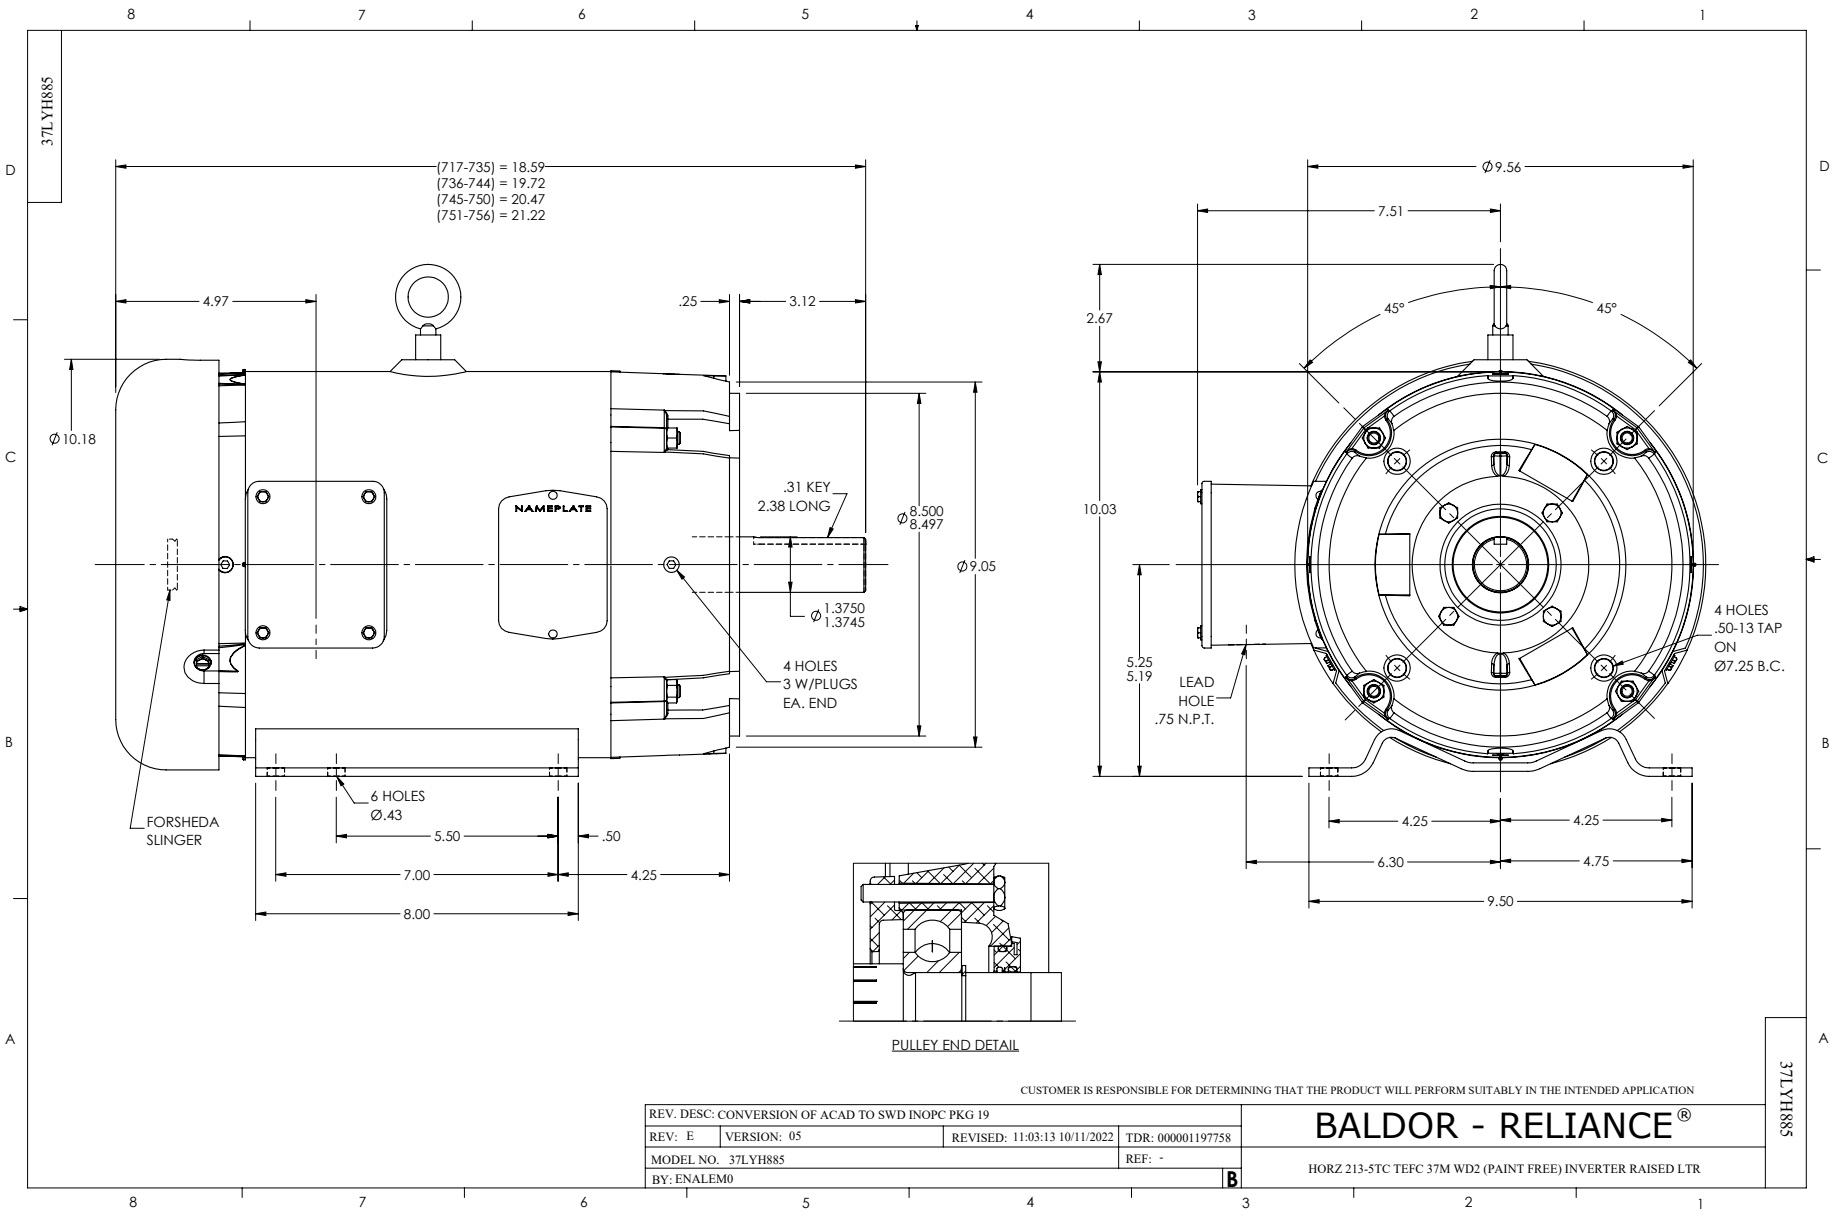
37LYH885
(717-735) = 18.59
(736-744) = 19.72
(745-750) = 20.47
(751-756) = 21.22
4.97
.25
3.12
Ø10.18
NAMEPLATE
.31 KEY
2.38 LONG
Ø8.500
8.497
Ø9.05
Ø1.3750
1.3745
4 HOLES
3 W/PLUGS
EA. END
FORSHEDA
SLINGER
6 HOLES
Ø.43
5.50
.50
7.00
4.25
8.00
Ø9.56
7.51
45°
45°
2.67
10.03
5.25
5.19
LEAD
HOLE
.75 N.P.T.
4 HOLES
.50-13 TAP
ON
Ø7.25 B.C.
4.25
4.25
6.30
4.75
9.50
PULLEY END DETAIL
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: CONVERSION OF ACAD TO SWD INOPC PKG 19
REV: E
VERSION: 05
REVISED: 11:03:13 10/11/2022
TDR: 000001197758
MODEL NO. 37LYH885
REF: -
BY: ENALEM0
B
BALDOR - RELIANCE®
HORZ 213-5TC TEFC 37M WD2 (PAINT FREE) INVERTER RAISED LTR
37LYH885

CD0005

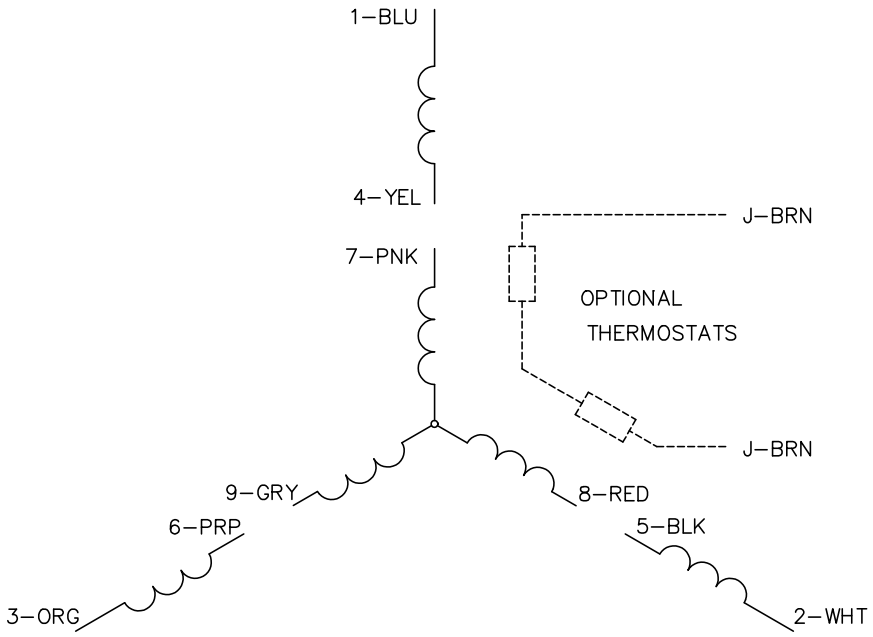

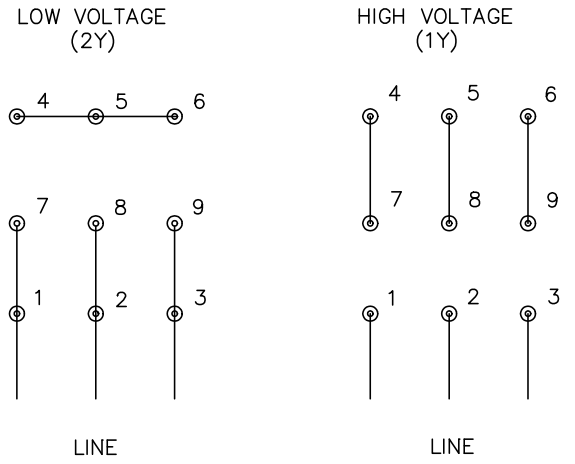

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
CD0005		FILE: AAA00005140	MDL: –
		MTL: –	3PH, DV, 9 LEADS