Customer information packet

IDM3665T

5HP, 1750RPM, 3PH, 60HZ, 184TC, 0640M, TEBC, F1
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/1/2026 6:21:22 PM

Specifications

Enclosure	TEBC
Frame	184TC
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
	460.0 V @ 60 HZ
Agency Approvals	UR
	CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	115V 1-Phase EXT
Current @ Voltage	13.000 A @ 230.0 V
	6.500 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	90.2 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Encoder/Feedback Device
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	6.5 a

Part Detail

Revision	AB
Type	AC
Mech. spec.	06F552
Base	
Status	PRD/A
Elec. spec.	06WGW352
Layout	06LYF552
Eff. date	09-30-2025
CD Diagram	CD0005
Poles	04
Leads	9#16
Proprietary	False
Created date	01-01-0001

Insulation Class	H
Inverter Code	Inverter Duty
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	6000 rpm
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0640M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	21.71 IN
Power Factor	80
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1750 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP4009L											
CAT.NO.	IDM3665T										
SPEC.	06F552W352G1										
FRAME	184TC		**H.P.**	5 TE							
VOLTS	230/460										
MAG. CUR.	6.8/3.4			**F.L. AMPS**	13/6.5						
R.P.M.	1750			**R.P.M. MAX**	6000						
HZ.	60	**PH.**	3	**CLASS**	H						
SER.F.	1.00	**DES.**	B	**SL HZ**	1.7						
NEMA NOM. EFF.	90.2	**WK2**	0.37								
BLOWER		**V**	115	**PH**	1	**HZ**	60	**AMPS**	.26		
RATING	40C AMB-CONT										
DE	6206	**ODE**	6205								
CC	010A	**SN**									
	1000:1 CT/VT										

Parts List

Part number	Description	Quantity
SA056377	SA 06F552W352G1	1.000 ea
RA050933	RA 06F552W352G1	1.000 ea
HW3201A05	3/8-16 EYEBOLT	1.000 ea
06CB3000	BALDOR CONDUIT BOX CAST	1.000 ea
06GS1000	GASKET,CONDUIT BOX	1.000 ea
51XW2520A12	SCREW, HEX SER SLT HD, ZN, 1/4-20 X .75	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
HW3001B01	BRASS CUP WASHER, FOR #10 SCREW	1.000 ea
36EP1101B41	FR TEBC 205 BRG W/ GRSR & THRU-SHAFT ENC	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
HW5100A05	WVY WSHR F/205 & 304 BRGS	1.000 ea
36PE1300A01	PU ENDPLATE, MACH	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
10XN2520A26	1/4-20X 1 5/8 HEX HD	4.000 ea
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	4.000 ea
HA3101A34	THRUBOLT- 1/4-20 X 10.375	4.000 ea
10XN2520A08	1/4-20X1/2 HEX HEAD CAP	1.000 ea
HA3218A05	M/FE STANDOFF UNIC#SX1043.25-20 .38 HEX	3.000 ea
10XN2520A06	1/4 20X3/8 HX HD CAP	3.000 ea
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	3.000 ea
06CB3500	BALDOR CONDUIT BOX LID	1.000 ea
06GS1001	BALDOR CONDUIT BOX GASKET	1.000 ea
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	2.000 ea
HA1005A03SP	SLINGER, OD 1.750, ID .938, 205 BRG	1.000 ea
HW2501E16	KEY, 1/4 SQ X 1.750	1.000 ea
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 ea
MJ5004A05	#242-21 LOCTITE GENERAL PURPOSE MED. STR	0.005 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
NP4009L	SS INV UL CSA-EEV CC NEMA PREM	1.000 ea
LB1009N	LABEL,ROTATION DIRECTION (ON ROLLS)	1.000 ea

MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
06FH5001A02	BLOWER ASSY. 06FH4001, EF0001	1.000 ea
MG1050G01	CELEROL MEDIUM CHARCOAL METALLIC GRAY	0.028 ga
LC0035B01	1PH, SV, FIX, 2 LEAD	1.000 ea
LC0145B01	CONNECTION LABEL	1.000 ea
37PA1074	PALLET PACK GRP, PRINT BOX PK1026A06	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea

BALDOR
A MEMBER OF THE ABB GROUP

AC Induction Motor Performance Data

Record # 20655
Typical performance - not guaranteed values

Winding: 06WGW352	**Type:** 0640M	**Enclosure:** TEFC


Nameplate Data				General Characteristics at 460 V, 60 Hz: High Volt Connection	
Rated Output (HP)	5			Full Load Torque	15 LB-FT
Volts	230/460			Start Configuration	DOL
Full Load Amps	13/6.5			Break Down Torque	50 LB-FT
R.P.M.	1750			Pull-Up Torque	30 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	32 LB-FT
NEMA Design Code	B	KVA Code	J	Starting Current	48 Amps
Service Factor	1.00			No-load Current	3.4 Amps
NEMA Nom. Eff.	90.2	P.F.	80	Line-line Res. @ 25°C.	2.61 Ohms
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	47°C
S.F. Amps				Temp. Rise @ S.F. Load	

Load Characteristics at 460 Volts, 60 Hz, 5 HP


% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	39	61	75	82	86	88	
Efficiency	84.1	89.4	90.4	90.2	89.4	88.3	
Speed	1789	1778	1767	1755	1742	1729	
Line Amperes	3.6	4.3	5.2	6.4	7.2	9	

Baldor Electric Company Fort Smith, Arkansas BALDOR • RELIANCE

Catalog	IDM3665T	NP VOLTS	230/460	ENCLOSURE	TEBC	WYE CONN EQ CKT OHMS PER PHASE (BASE RATING, 20C)	
FRAME	184TC	NP AMPS	13/6.5	Base Volts	460	R1 1.200	X1 2.786
HP	5 HP	DUTY	Cont	Base AMPS	6.4	R2 0.977	X2 2.177
BASE SPEED	1800	MAX SAFE RPM	6000	Slip Hz	1.50		XM 78.683
PHASE/HZ	3/60	AMB^{0}C/INSUL	40/H	WK^2 (lb-ft^2)	0.372		

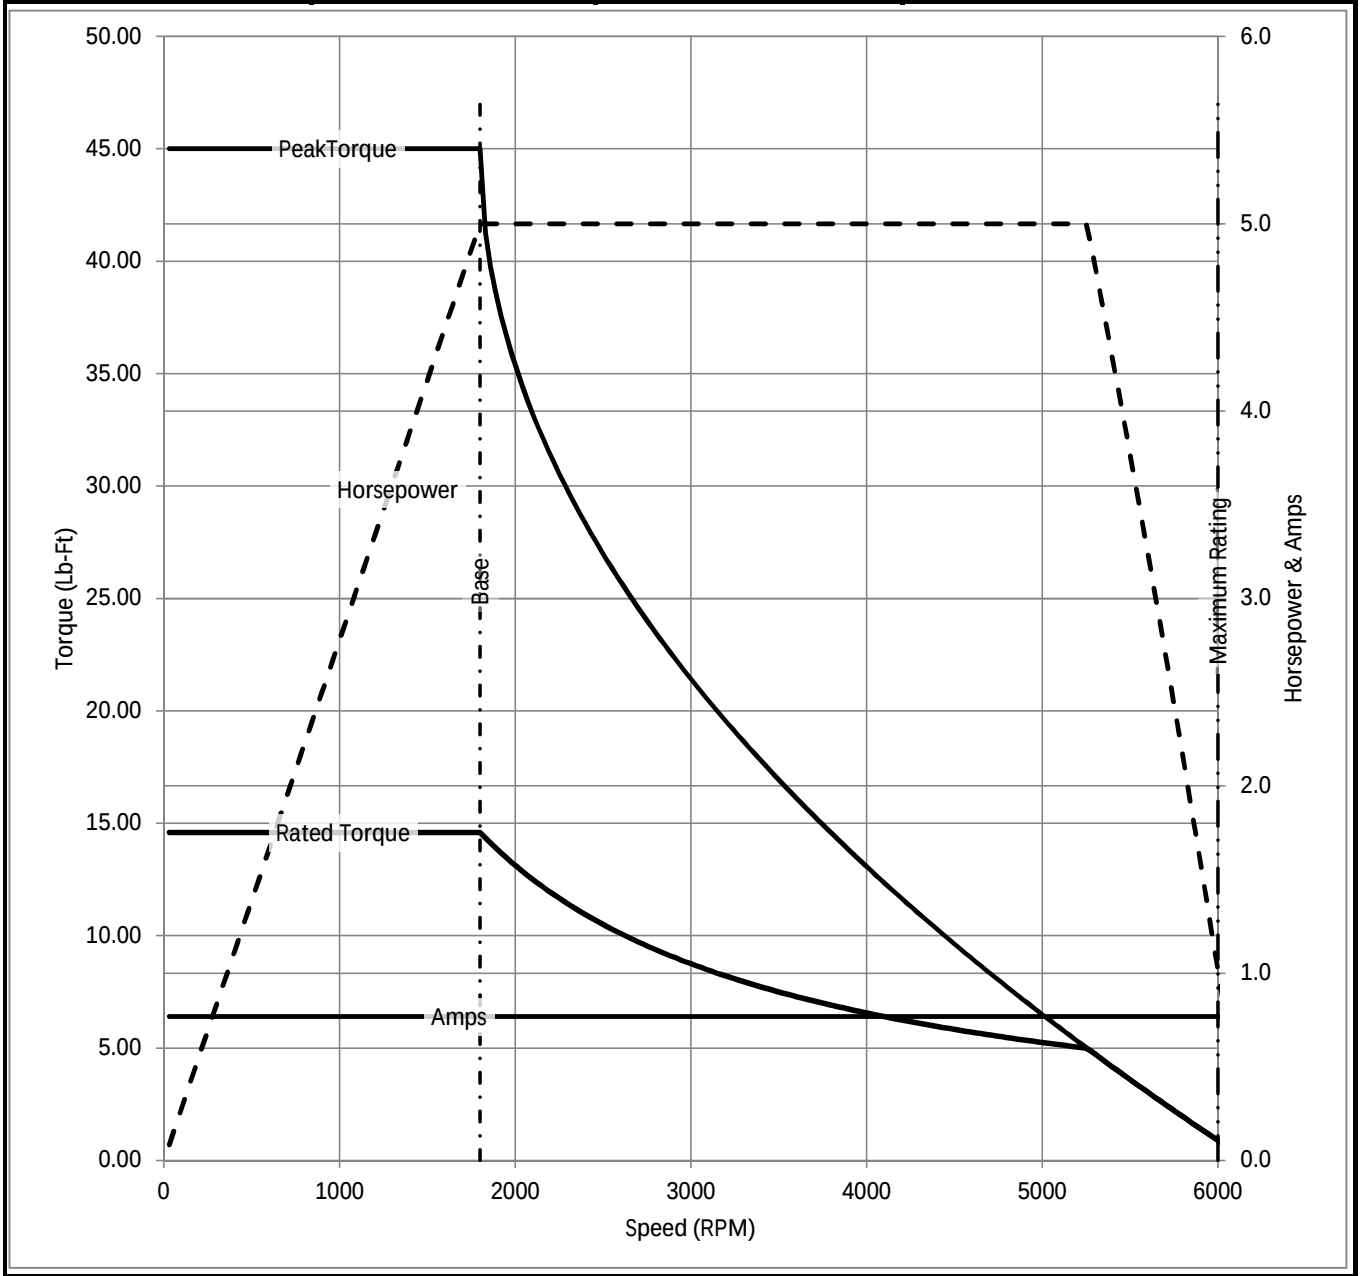

Remarks: Calculated Data

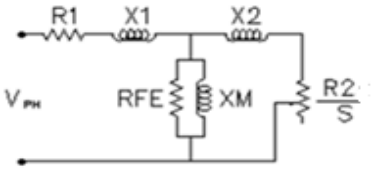


BALDOR
A MEMBER OF THE ABB GROUP

DR BY ENR
CK BY
APP BY ENR
DATE 2/26/2013


A-C MOTOR
PERFORMANCE CURVES


06F552W352G1

ISSUE DATE 2/26/2013

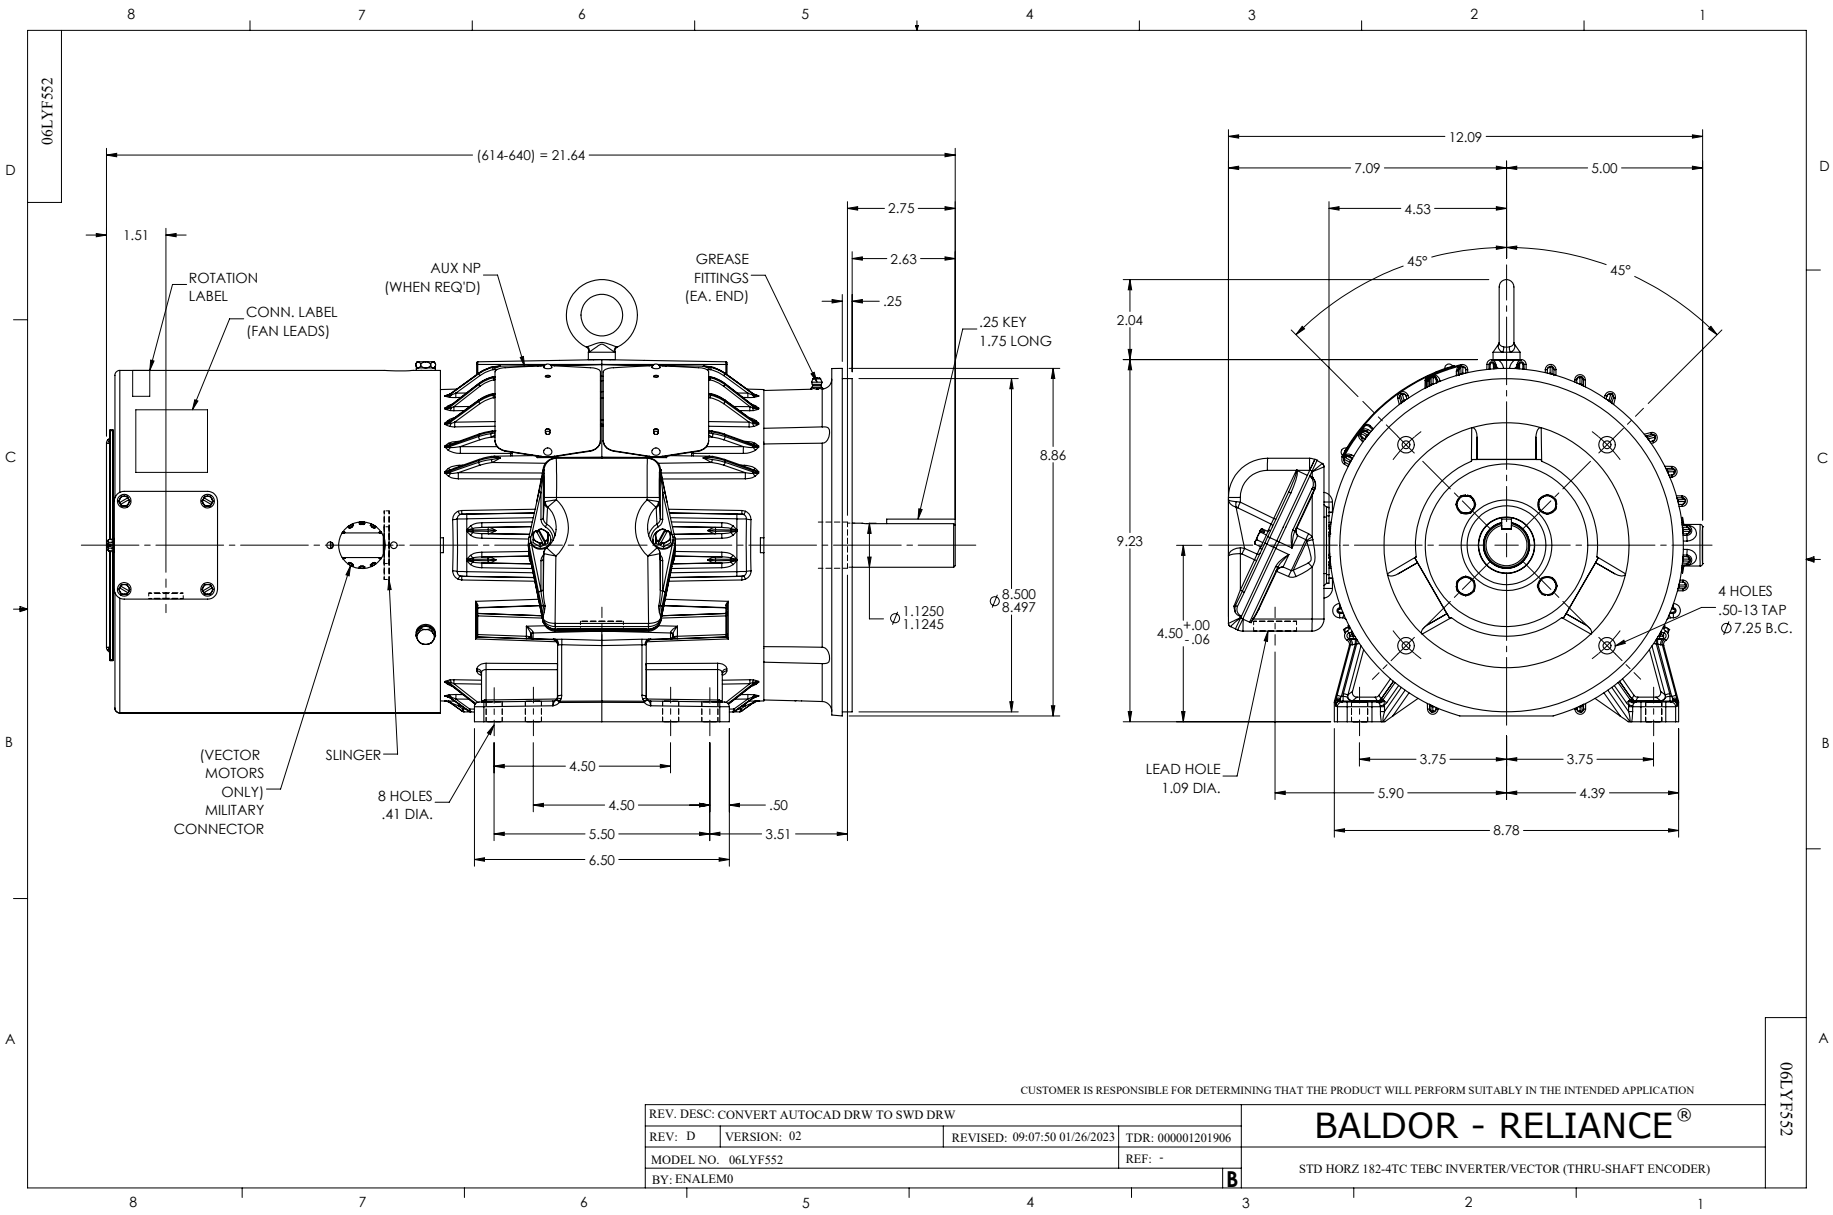
06LYF552
(614-640) = 21.64
1.51
ROTATION LABEL
CONN. LABEL (FAN LEADS)
AUX NP (WHEN REQ'D)
GREASE FITTINGS (EA. END)
2.75
2.63
.25
.25 KEY 1.75 LONG
8.86
Ø1.1250 1.1245
Ø8.500 8.497
(VECTOR MOTORS ONLY) MILITARY CONNECTOR
SLINGER
8 HOLES .41 DIA.
4.50
4.50
.50
5.50
3.51
6.50
12.09
7.09
5.00
4.53
45°
45°
2.04
9.23
4.50 +.00 -.06
4 HOLES .50-13 TAP Ø7.25 B.C.
LEAD HOLE 1.09 DIA.
3.75
3.75
5.90
4.39
8.78
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: CONVERT AUTOCAD DRW TO SWD DRW
REV: D
VERSION: 02
REVISED: 09:07:50 01/26/2023
TDR: 000001201906
MODEL NO. 06LYF552
REF: -
BY: ENALEM0
B
BALDOR - RELIANCE®
STD HORZ 182-4TC TEBC INVERTER/VECTOR (THRU-SHAFT ENCODER)
06LYF552

CD0005

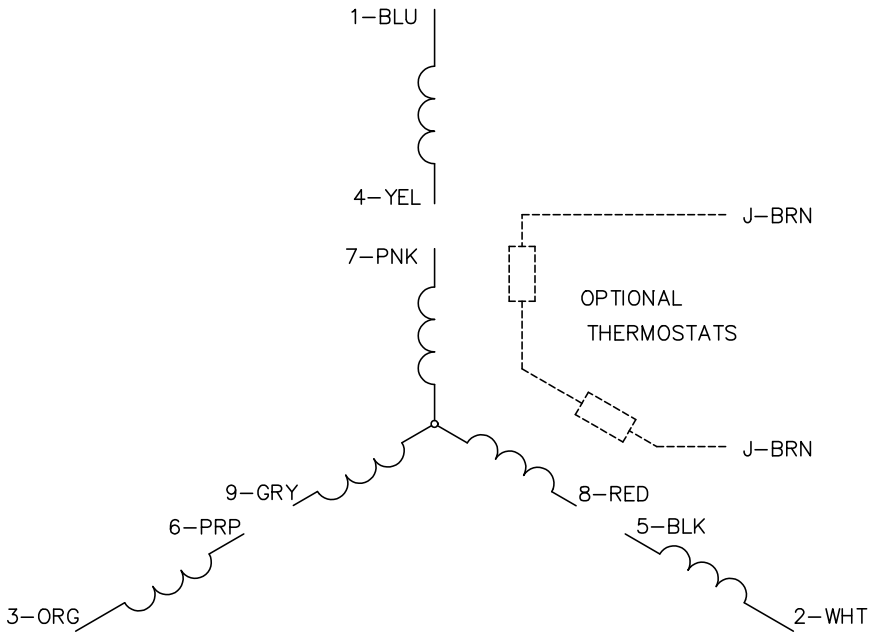

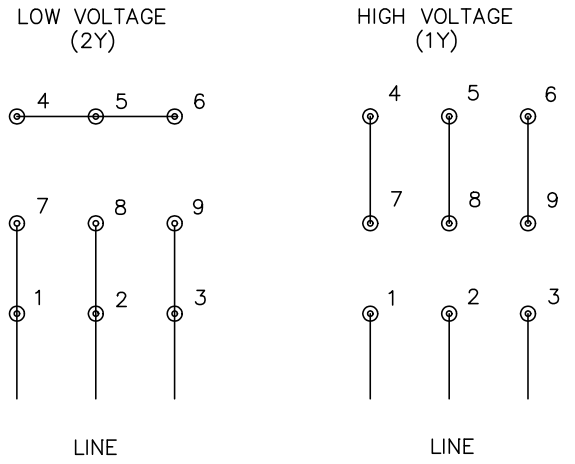

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
CD0005		FILE: AAA00005140	MDL: –
		MTL: –	3PH, DV, 9 LEADS