

# ABB BALDOR RELIANCE III

---

## Customer information packet

### IDVSNM3661T

3HP, 1760RPM, 3PH, 60HZ, 182TC, 0636M, TENV, F1

Class - None

Division - Not Applicable

**Specifications**

<b>Enclosure</b>	TENV
<b>Frame</b>	182TC
<b>Frame Material</b>	Iron
<b>Frequency</b>	60.00 Hz
<b>Haz Area Class and Group</b>	None
<b>Haz Area Division</b>	Not Applicable
<b>Motor Letter Type</b>	Three Phase
<b>Output @ Frequency</b>	3.000 HP @ 60 HZ
<b>Phase</b>	3
<b>Synchronous Speed @ Frequency</b>	1800 RPM @ 60 HZ
<b>Voltage @ Frequency</b>	230.0 V @ 60 HZ 460.0 V @ 60 HZ
<b>Agency Approvals</b>	UR CSA
<b>Ambient Temperature</b>	40 °C
<b>Auxiliary Box</b>	NO AUXILLARY BOX
<b>Auxiliary Box Lead Termination</b>	None
<b>Base Indicator</b>	Rigid
<b>Bearing Grease Type</b>	Polyrex EM (-20F +300F)
<b>Blower</b>	None
<b>Current @ Voltage</b>	4.300 A @ 460.0 V 8.600 A @ 230.0 V
<b>Design Code</b>	A
<b>Drip Cover</b>	No Drip Cover
<b>Duty Rating</b>	CONT
<b>Efficiency @ 100% Load</b>	89.5 %
<b>Electrically Isolated Bearing</b>	Not Electrically Isolated
<b>Feedback Device</b>	NO FEEDBACK
<b>Front Face Code</b>	Encoder/Feedback Device
<b>Front Shaft Indicator</b>	No Key Or Flat
<b>Heater Indicator</b>	No Heater
<b>High Voltage Full Load Amps</b>	4.3 a

**Part Detail**

<b>Revision</b>	J
<b>Type</b>	AC
<b>Mech. spec.</b>	06H927
<b>Base</b>	
<b>Status</b>	PRD/A
<b>Elec. spec.</b>	06WGX370
<b>Layout</b>	06LYH927
<b>Eff. date</b>	09-30-2025
<b>CD Diagram</b>	CD0005
<b>Poles</b>	04
<b>Leads</b>	9#16
<b>Proprietary</b>	False
<b>Created date</b>	09-04-2012

<b>Insulation Class</b>	F
<b>Inverter Code</b>	Inverter Duty
<b>KVA Code</b>	L
<b>Lifting Lugs</b>	Standard Lifting Lugs
<b>Locked Bearing Indicator</b>	Locked Bearing
<b>Max Speed</b>	6000 rpm
<b>Motor Lead Exit</b>	Ko Box
<b>Motor Lead Quantity/Wire Size</b>	9 @ 16 AWG
<b>Motor Lead Termination</b>	Flying Leads
<b>Motor Standards</b>	NEMA
<b>Motor Type</b>	0636M
<b>Mounting Arrangement</b>	F1
<b>Number of Poles</b>	4
<b>Overall Length</b>	17.85 IN
<b>Power Factor</b>	73
<b>Product Family</b>	General Purpose
<b>Pulley End Bearing Type</b>	Ball
<b>Pulley Face Code</b>	C-Face
<b>Pulley Shaft Indicator</b>	Standard
<b>Rodent Screen</b>	None
<b>RoHS Status</b>	ROHS COMPLIANT
<b>Service Factor</b>	1.00
<b>Shaft Diameter</b>	1.125 IN
<b>Shaft Extension Location</b>	Pulley End
<b>Shaft Ground Indicator</b>	No Shaft Grounding
<b>Shaft Rotation</b>	Reversible
<b>Shaft Slinger Indicator</b>	No Slinger
<b>Speed</b>	1760 rpm
<b>Speed Code</b>	Single Speed
<b>Starting Method</b>	Direct on line
<b>Thermal Device - Bearing</b>	None
<b>Thermal Device - Winding</b>	Normally Closed Thermostat
<b>Vibration Sensor Indicator</b>	No Vibration Sensor
<b>Winding Thermal 1</b>	None

**Winding Thermal 2**

**None**

---

**Nameplate**

<b>NP4564L</b>	
<b>CAT.NO.</b>	IDVSNM3661T
<b>SPEC.</b>	06H927X370G1
<b>FRAME</b>	182TC <b>H.P.</b> 3
<b>VOLTS</b>	230/460
<b>MAG. CUR.</b>	4.8/2.4 <b>F.L. AMPS</b> 8.6/4.3
<b>R.P.M.</b>	1760 <b>R.P.M. MAX</b> 6000
<b>HZ.</b>	60 <b>PH.</b> 3 <b>CLASS</b> F
<b>SER.F.</b>	1.00 <b>SL HZ</b> 1.2
<b>NEMA NOM. EFF.</b>	89.5 <b>WK2</b> 0.335
<b>RATING</b>	40C AMB-CONT <b>ENCL</b> TENV
<b>DE</b>	6206 <b>ODE</b> 6206
<b>CC</b>	010A <b>SN</b>
	1.5:1 CHP PWM
	1000:1 CT/VT

**Parts List**

<b>Part number</b>	<b>Description</b>	<b>Quantity</b>
SA250812	SA 06H927X370G1	1.000 ea
RA237660	RA 06H927X370G1	1.000 ea
HW3201A05	3/8-16 EYEBOLT	1.000 ea
06CB1000A03	CONDUIT BOX, MACH	1.000 ea
06GS1000	GASKET, CONDUIT BOX	1.000 ea
51XW2520A12	SCREW, HEX SER SLT HD, ZN, 1/4-20 X .75	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
HW3001B01	BRASS CUP WASHER, FOR #10 SCREW	1.000 ea
36EP1301A81	FRONT 182-4C 206 BRG W/ GRS & DRILLED T-	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
HW5100A06	W2420-025 WVY WSHR (WB)	1.000 ea
36PE1300A01	PU ENDPLATE, MACH	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
10XN2520A26	1/4-20X 1 5/8 HEX HD	4.000 ea
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	4.000 ea
HA3101A39	THRUBOLT 1/4-20 X 10.687	4.000 ea
HA6881	BEI HS35 THRU SHAFT ENCODER PROTECTIVE C	1.000 ea
10XN3816A10	3/8-16 X 5/8 HEX HD CAP SCREW	3.000 ea
06CB1500A01	CONDUIT BOX LID, MACH	1.000 ea
06GS1001	BALDOR CONDUIT BOX GASKET	1.000 ea
10XN2520A12	1/4-20 X 3/4 HEX HEAD CAP	2.000 ea
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	2.000 ea
HW2501E16	KEY, 1/4 SQ X 1.750	1.000 ea
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
MG1000N49	MUNSELL 8.5BG 3.57/2.0, GLOSS 30, B/G,	0.028 ga
LC0145B01	CONNECTION LABEL	1.000 ea
NP4564L	ALUM INV UL EEV NEMA CC (W/OUT DESIGN FI	1.000 ea
36PA1001	PKG GRP, PRINT PK1017A07	1.000 ea

MN416A01

TAG-INSTAL-MAINT no wire (2500 bx)11/25

1.000 ea

---

NP VOLTS	230/460	MAX SAFE RPM	2700	WYE CONN EQ CKT OHMS PER PHASE (BASE RATING, 20C)			
NP AMPS	8.6/4.3	Base Volt	460	R1	1.900	X1	5.040
HP	3HP	NL AMPS	2.5	R2	1.350	X2	4.290
BASE SPEED	1760	Slips	0.87			XM	112.000
PHASE/HZ	3/60	WK <sup>2</sup> (lb-ft <sup>2</sup> )	0.326				

### Rated Full Load Data

	RPM	HP	Torque	Volts	Freq-Hz	Amps
Base Speed	1765	3.0	9.0	460	60	4.3
Max Speed	2647	3.0	6.0	460	90	3.9
Min Speed	0	0.0	9.0	32.46	0.87	4.3

### Load Performance at Base Speed

	RPM	HP	Torque	Volts	Freq-Hz	Amps
No Load	1799	0.0	0.0	460	60	2.5
1/4	1791	0.8	2.3	460	60	2.7
1/2	1783	1.5	4.5	460	60	3.0
3/4	1774	2.3	6.7	460	60	3.6
Full Load	1765	3.0	9.0	460	60	4.3
O/L	1726	6.0	18.3	460	60	7.9

Blower Data	Volts	Ph/Hz	FL Amps	LR Amps	Frame	CFM

Remarks: Calculated Data  
Vector PWM Inverter Duty



DR BY HDO  
CK BY  
APP BY HDO  
DATE 1/13/2016


**A-C MOTOR** **06WGX370**  
**PERFORMANCE**  
**CURVES**

NP VOLTS 230/460  
NP AMPS 8.6/4.3  
HP 3HP  
BASE SPEED 1760  
PHASE/HZ 3/60

MAX SAFE RPM 2700  
Base Volt 460  
NL AMPS 2.47  
Slips 0.87  
WK2 (lb-ft) 0.326

WYE CONN EQ CKT OHMS PER PHASE (BASE RATING, 20C)  
R1 1.900 X1 5.040  
R2 1.350 X2 4.290  
XM 112.000

Vector PWM Inverter Duty  
Variable Speed AC Motor Curves

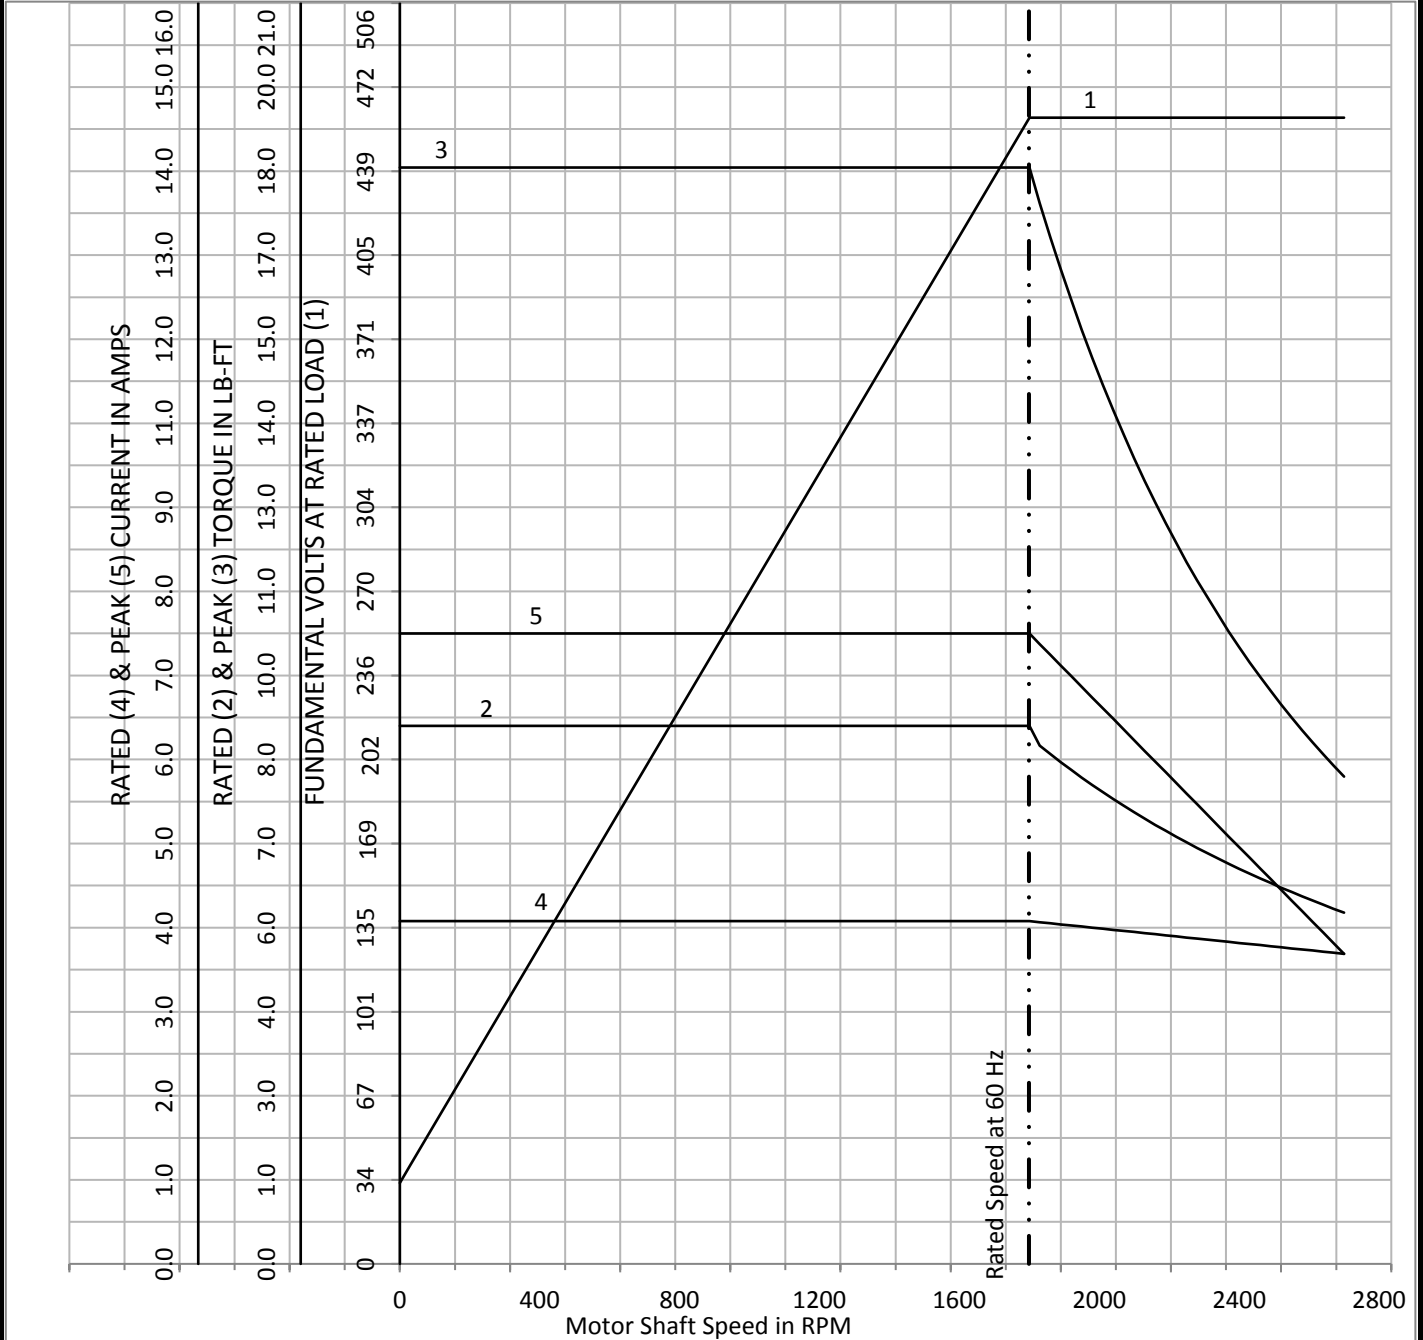

Calculated Data

Data Valid For Nameplate Speed Range only




DR BY HDO  
CK BY  
APP BY HDO  
DATE 1/13/2016

**A-C MOTOR**  
**PERFORMANCE**  
**CURVES**  
**06WGX370**

NP VOLTS	230/460	MAX SAFE RPM	2700	WYE CONN EQ CKT OHMS PER PHASE (BASE RATING, 20C)			
NP AMPS	8.6/4.3	Base Volt	460	R1	1.900	X1	5.040
HP	3HP	NL AMPS	2.47	R2	1.350	X2	4.290
BASE SPEED	1760	Slips	0.87			XM	112.000
PHASE/HZ	3/60	WK2 (lb-ft <sup>2</sup> )	0.326				

Vector PWM Inverter Duty  
Variable Speed AC Motor Curves

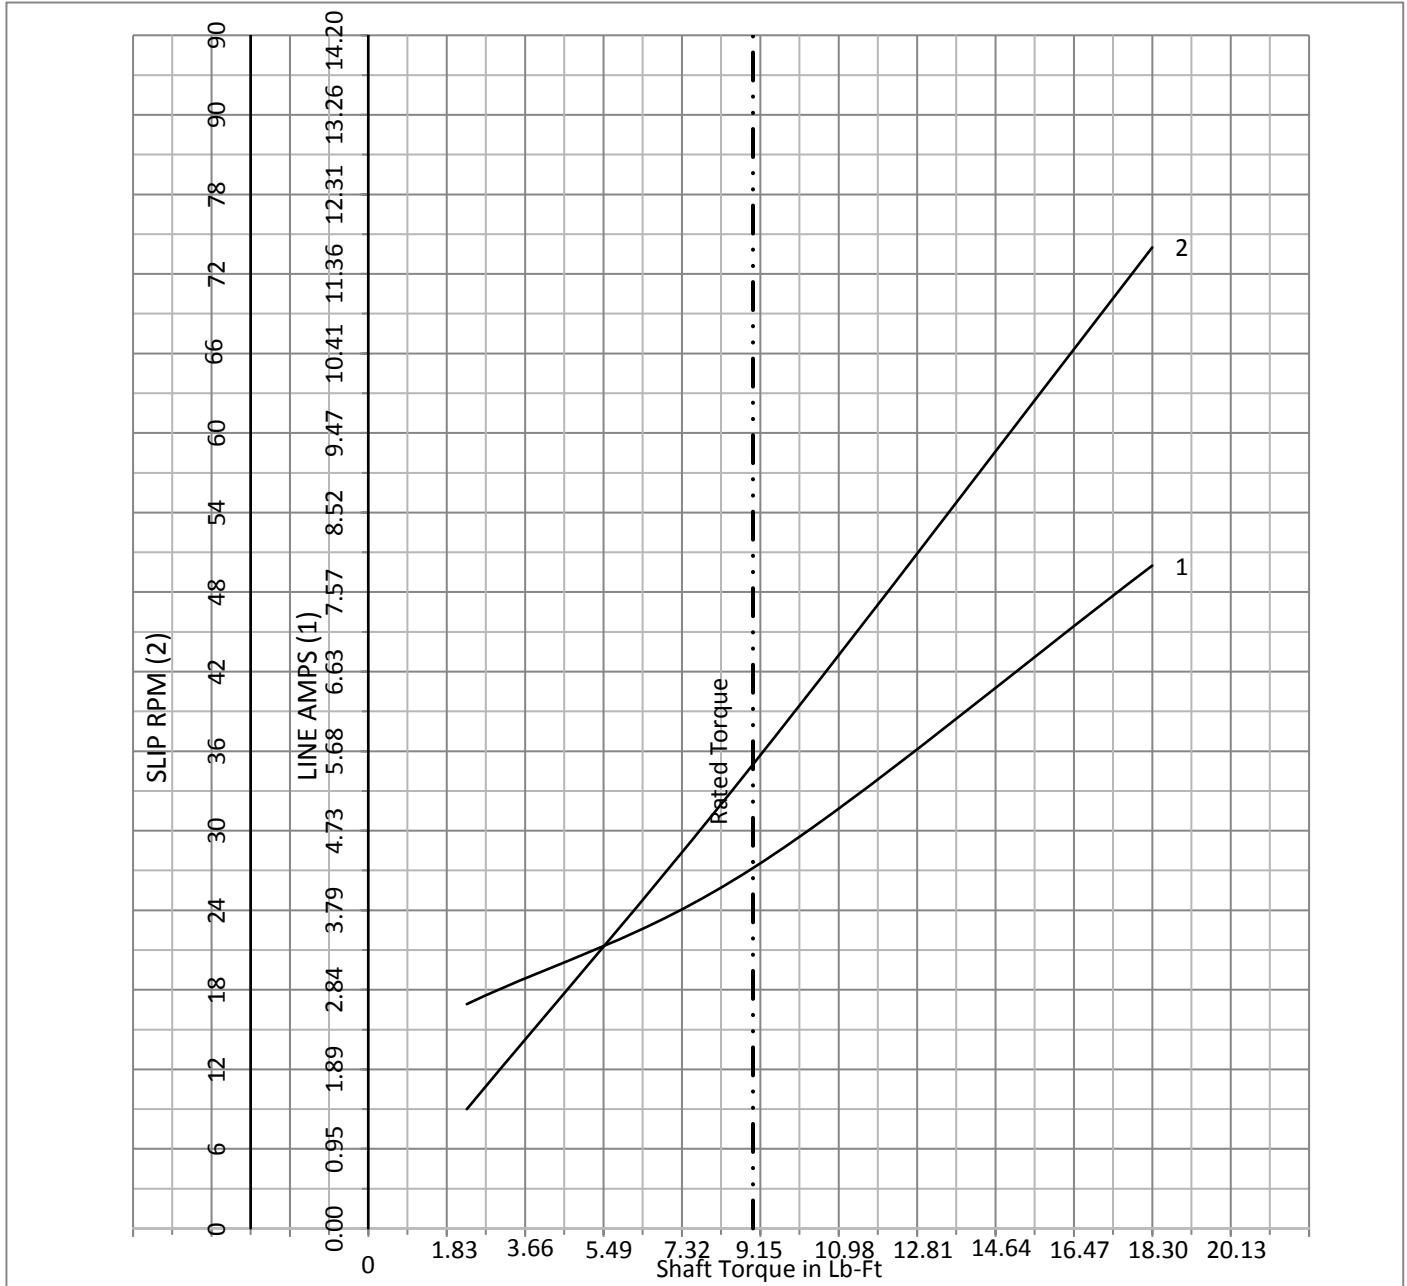


Calculated Data

Data Valid For Nameplate Speed Range only




DR BY HDO  
 CK BY  
 APP BY HDO  
 DATE 1/13/2016


**A-C MOTOR** 06WGX370  
**PERFORMANCE**  
**CURVES**

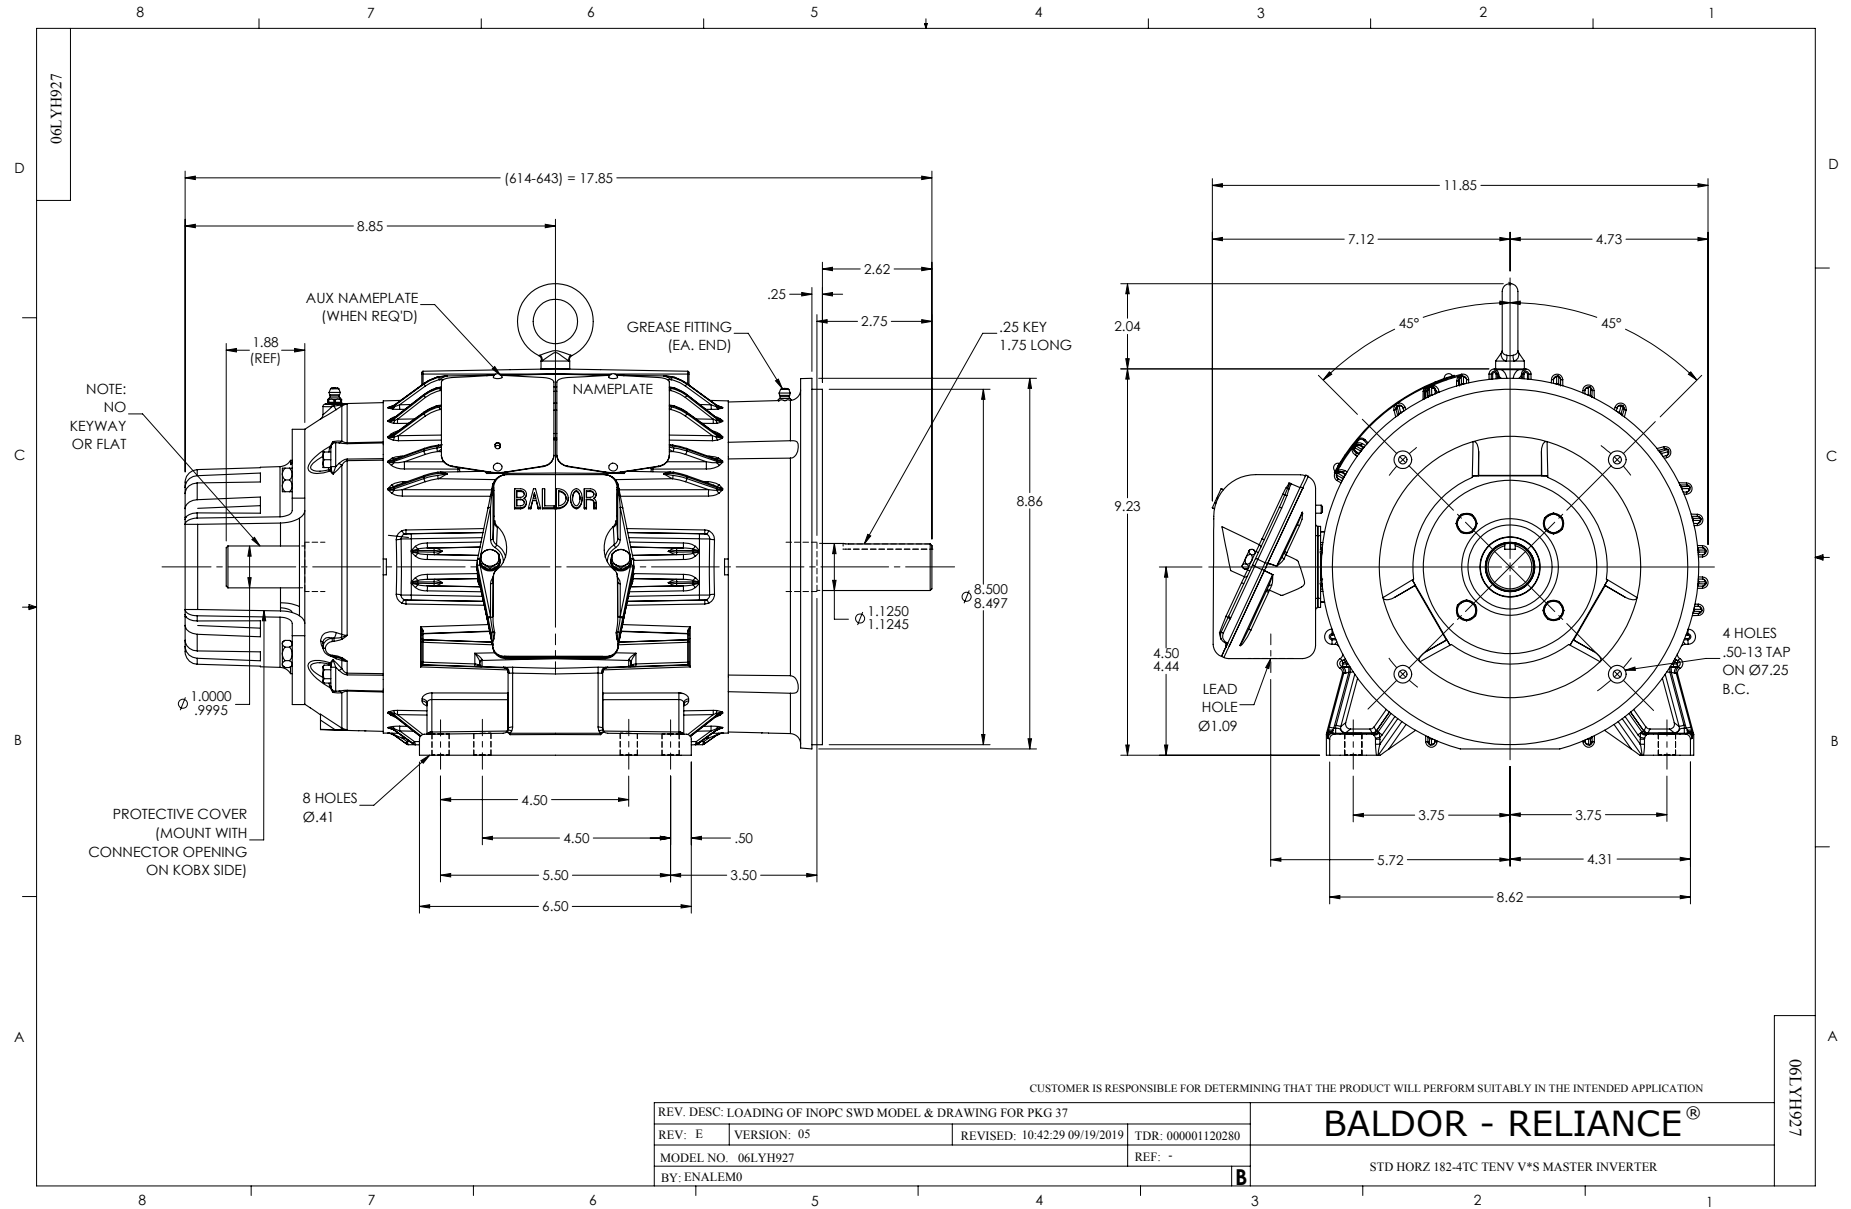

CD0005

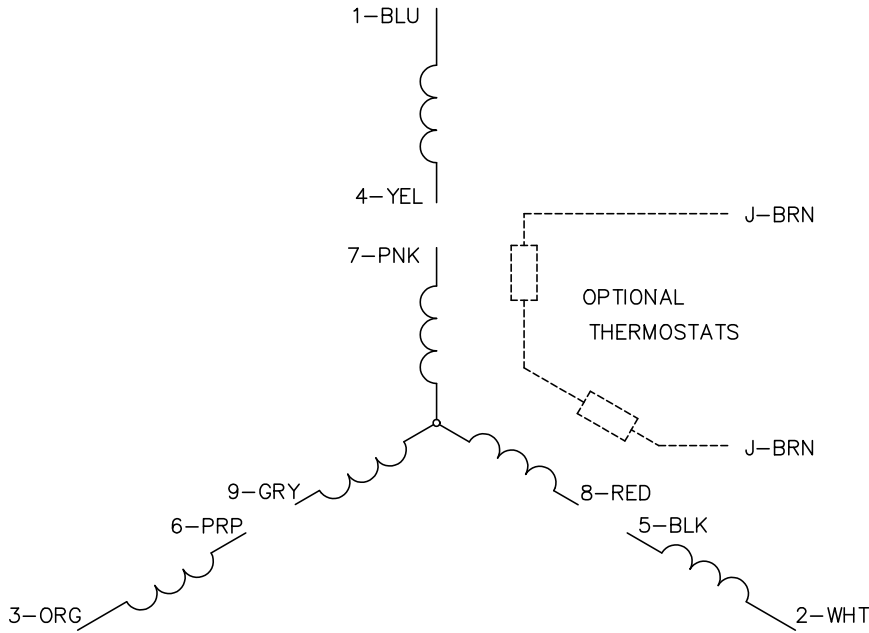


LOW VOLTAGE  
(2Y)

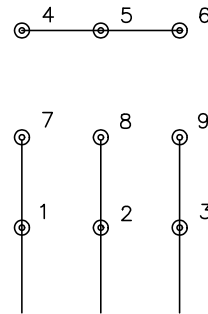

LINE

HIGH VOLTAGE  
(1Y)

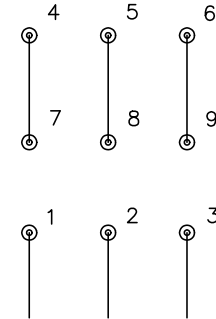

LINE

**NOTES:**

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
S00000		FILE: AAA00005140	MDL: -
		MTL: -	

**BALDOR ELECTRIC Co.**

3PH, DV, 9 LEADS