

ABB BALDOR RELIANCE III

Customer information packet

JMEWDM4110T

40HP, 1770RPM, 3PH, 60HZ, 324JM, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	324JM
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	40.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA CSA EEV NEMA PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	92.000 A @ 230.0 V 46.000 A @ 460.0 V 102.000 A @ 208.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	94.1 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater

Part Detail

Revision	F
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	12WGY859
Layout	12LYL057
Eff. date	02-21-2024
CD Diagram	CD0180
Poles	04
Leads	9#8
Proprietary	False
Created date	01-15-2020

High Voltage Full Load Amps	46.0 a
Insulation Class	F
Inverter Code	Not Inverter
IP Rating	NONE
KVA Code	F
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	1260M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	30.53 IN
Power Factor	86
Product Family	Washdown Features
Pulley Face Code	C-Face
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1770 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1669L									
CAT.NO.	JMEWDM4110T								
SPEC.	12-0000-1426								
HP	40								
VOLTS	230/460								
AMP	92/46								
RPM	1770								
FRAME	324JM		HZ	60			PH	3	
SER.F.	1.15	CODE	F	DES	B	CLASS		F	
NEMA-NOM-EFF	94.1	PF	86						
RATING	40C AMB-CONT								
CC	010A								
DE	6312		ODE	6311					
ENCL	TEFC	SN							
BLANK	20:1 CT & VT,1.0SF								

Parts List

Part number	Description	Quantity
SA378111	SA 12-0000-1426	1.000 ea
RA368044	RA 12-0000-1426	1.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
LC0181	CONNECTION LABEL	1.000 ea
NP1669L	SS WD SUPER-E UL PREM REV MTG	1.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500 bx)11/25	1.000 ea
12FH1002WP	FAN COVER, W/WHITE EPOXY, PRIMED CASTING	1.000 ea
HW1001S50	WASHER, 1/2 SPLT LK, STAINLESS STEEL	4.000 ea
XY5013S12	1/2-13 HEX R.H. NUT ST.S	4.000 ea
09FN3001B03SP	EXTERNAL FAN, PLASTIC (COMES W/SCREW FRO	1.000 ea
HW2500A25	WOODRUFF KEY USA #1008 #BLOW CARBON STEE	1.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.200 lb
WD4100A02	DP-1000 HEYCO PLUG OR 62MP1000 MICRO PL	1.000 ea
12EP1107A12WP	FREP TENV 324-6T NO GREASERS W/WHITE EPO	1.000 ea
HA3400S13	303 S.S. STUD, 1/2-13 X 7" WELKER	4.000 ea
HW1001S50	WASHER, 1/2 SPLT LK, STAINLESS STEEL	4.000 ea
HW4600B41	V-RING SLINGER 2.125 X 2.880 X 0.280	1.000 ea
HW5100A13	W4627-047 WVY WSHER	1.000 ea
HA4066A01	PUSH IN T-DRAIN FITTING (BLACK)	1.000 ea
12EP1105A12P	PU ENDPLATE, MACH - NO GREASERS W/EPOXY	1.000 ea
HW1001S50	WASHER, 1/2 SPLT LK, STAINLESS STEEL	1.000 ea
10XN5013S28	1/2-13X1 3/4 HEX SS CAP	4.000 ea
HW4600B41	V-RING SLINGER 2.125 X 2.880 X 0.280	1.000 ea
HW4600B34	SINGLE LIP SEAL 2.250 X 2.997 X .438,DBL	1.000 ea
10XN3118S44	5/16-18 X 2 3/4 HEX HEAD SS	4.000 ea
HA4066A01	PUSH IN T-DRAIN FITTING (BLACK)	1.000 ea
10CB1000A203P	KOBX W/2.00 NPT & .31 GND MTG, EPOXY PRI	1.000 ea
09GS1010	GASKET, DWG, LEADWIRE SEPERATOR	1.000 ea
10XN3118K16	5/16-18 X 1' GRADE #5, STL, ZINC PLATE	4.000 ea
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	4.000 ea

WD1000B25	GND LUG, BURNDY L125HP OR T&B L125HP-BB	1.000 ea
19XW3118G08	.31-18X.50,HEX WSHR HD,TAPTITE 2,GREEN	1.000 ea
10CB1500P	CONDUIT BOX LID, CAST W/EPOXY PRIMER	1.000 ea
14GS1003	GASKET CONDUIT BOX LID, NEOP	1.000 ea
10XN2520S16	1/4-20 X 1 HEX HEAD SS	4.000 ea
HW1001S25	WASHER, 1/4 SPLT LK, STAINLESS STEEL	4.000 ea
MG1025W01	WILKOFAS, 781.01, SIGNAL WHITE #9003	0.125 ga
MJ5001A27	32220KN GRAY SEALER *MIN BUY 4 QTS=1GAL	0.031 qt
MJ5002A01	SILICON RUBBER SEALANT, 732CL 10.3 OZ TU	0.033 ea
12PA1000	PACKAGING GROUP PRINT PK1024A07	1.000 ea
HW2502E23	#303 SS,SQ KEY 1/4 X 2.625	1.000 ea
51XB1214S20	12-14X1.25 HXWSSLD SERTYB, SS	1.000 ea

AC Induction Motor Performance Data

Record # 48093

Typical performance - not guaranteed values

Winding: 12WGY859-R001				Type: 1260M		Enclosure: TEFC	
Nameplate Data				460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		40		Full Load Torque		118 LB-FT	
Volts		230/460		Start Configuration		direct on line	
Full Load Amps		92/46		Breakdown Torque		305 LB-FT	
R.P.M.		1770		Pull-up Torque		146 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		173 LB-FT	
NEMA Design Code		B	KVA Code	F	Starting Current		273 A
Service Factor (S.F.)		1.15		No-load Current		14.3 A	
NEMA Nom. Eff.		94.1	Power Factor	86	Line-line Res. @ 25°C		0.16401 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		62°C	
S.F. Amps				Temp. Rise @ S.F. Load		78°C	
				Locked-rotor Power Factor		27	
				Rotor inertia		7.99 LB-FT2	

Load Characteristics 460 V, 60 Hz, 40 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	57	77	84	86	87	86	87
Efficiency	92.6	94.7	94.8	94.3	93.5	92.5	93.8
Speed	1794.1	1788	1780.8	1773.7	1765.2	1756.6	1769
Line amperes	18.1	25.6	35.6	46.1	57.9	70.1	53.2


ABB Motors and Mechanical Inc.


WINDING # 12WGY859

Typical performance - not guaranteed values.


40 HP 3 PH 60 HZ 1770 RPM 460 V 1260M

TORQUES (LB-FT): PO=305 PU=146 LR=173 LRA=273

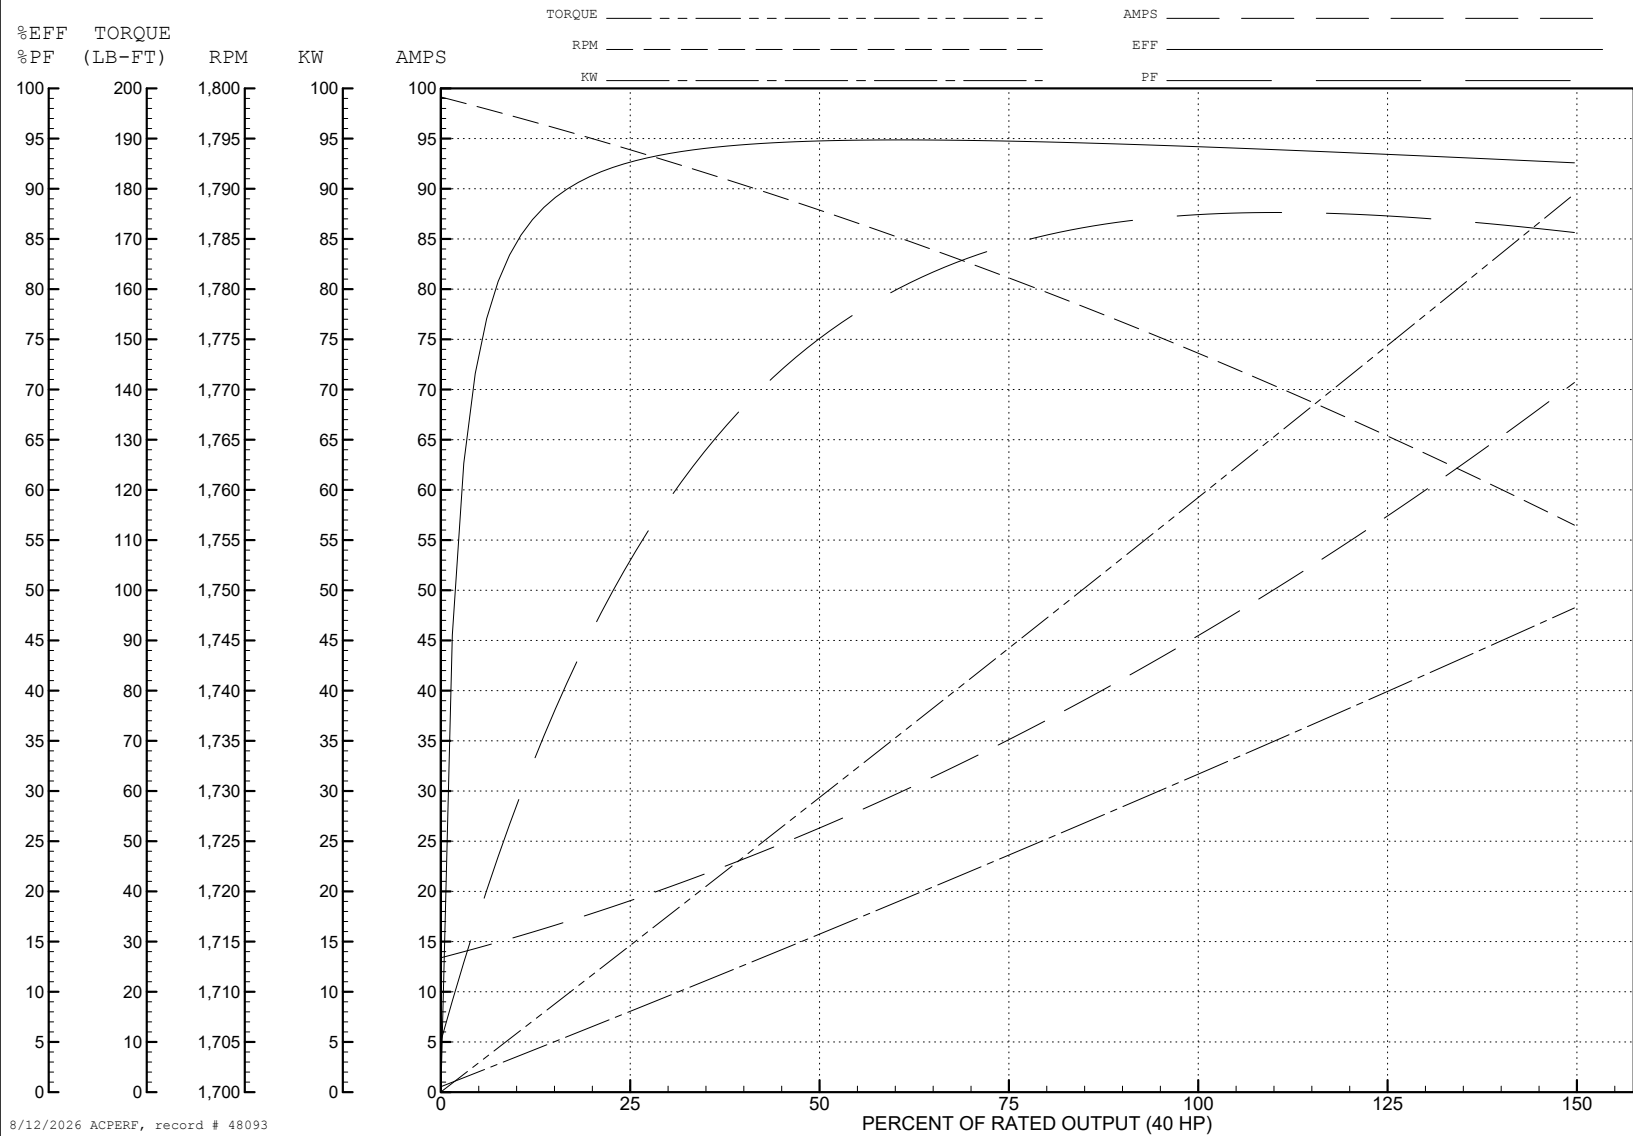


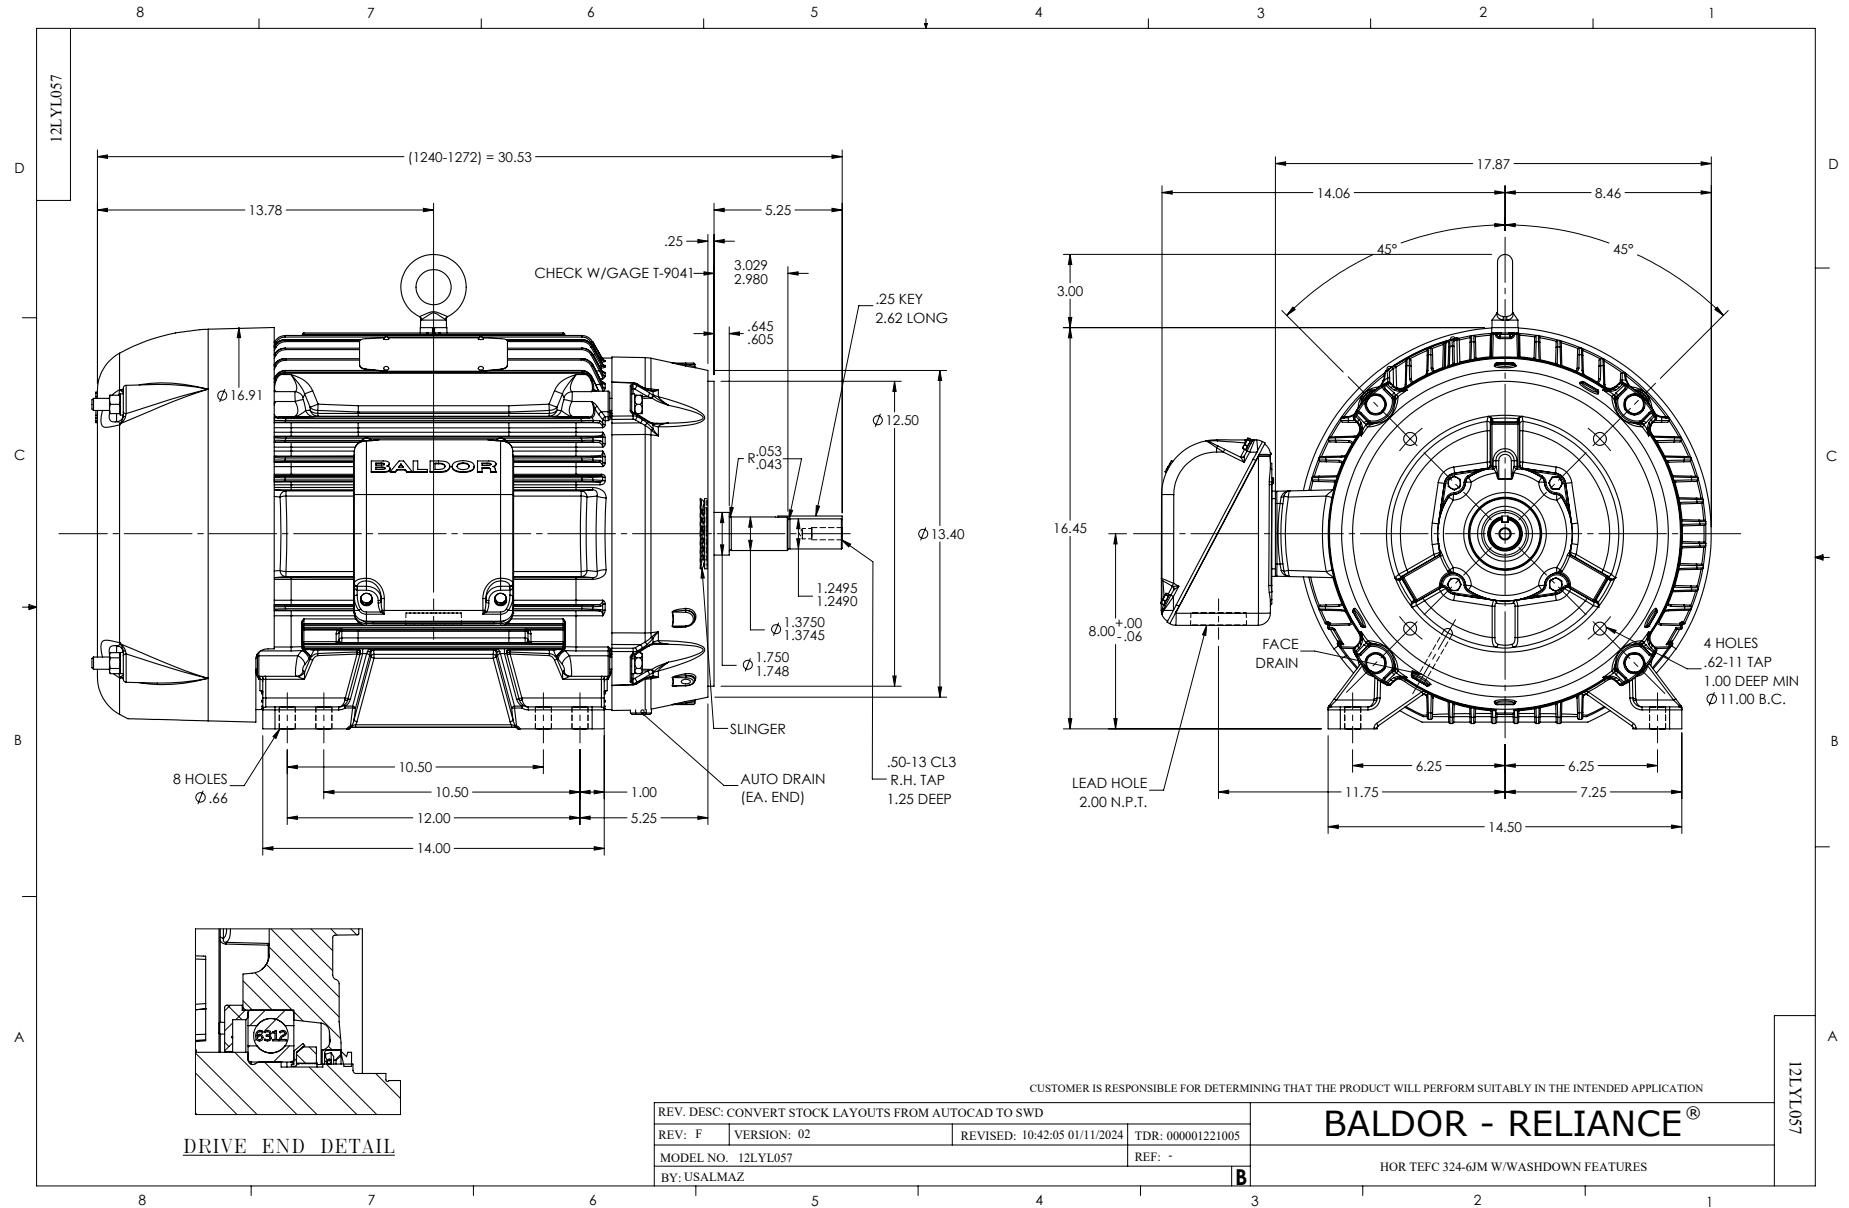

CD0180

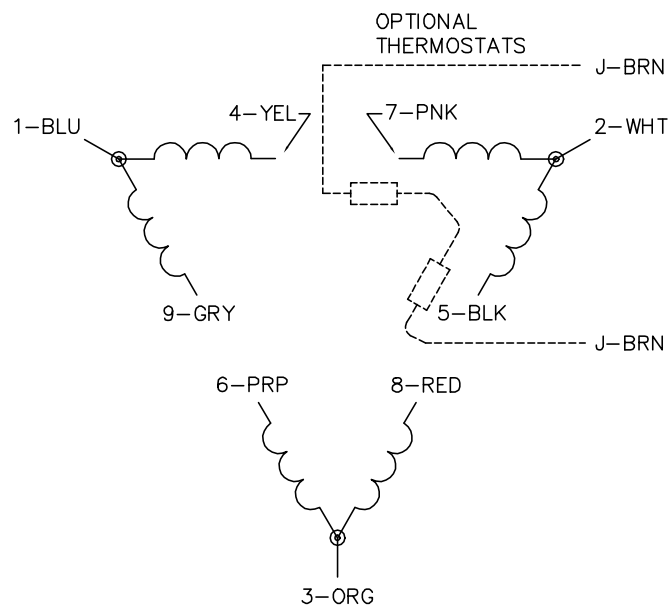

LOW VOLTAGE
(2D)



HIGH VOLTAGE
(1D)



NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007

REV. LTR: D

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\148

REVISED: 10: 25: 29 02/19/2019

BY: ENBRIRO

MTL: —



BALDOR - RELIANCE®

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1